

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> :  <b>A61M 1/36</b></p>	<p><b>A2</b></p>	<p>(11) International Publication Number: <b>WO 96/40322</b></p> <p>(43) International Publication Date: 19 December 1996 (19.12.96)</p>																														
<p>(21) International Application Number: <b>PCT/US96/10212</b></p> <p>(22) International Filing Date: <b>5 June 1996 (05.06.96)</b></p> <p>(30) Priority Data:</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">480,617</td> <td style="width: 45%;">7 June 1995 (07.06.95)</td> <td style="width: 40%;">US</td> </tr> <tr> <td>504,049</td> <td>7 June 1995 (07.06.95)</td> <td>US</td> </tr> <tr> <td>486,012</td> <td>7 June 1995 (07.06.95)</td> <td>US</td> </tr> <tr> <td>483,515</td> <td>7 June 1995 (07.06.95)</td> <td>US</td> </tr> <tr> <td>483,574</td> <td>7 June 1995 (07.06.95)</td> <td>US</td> </tr> <tr> <td>487,606</td> <td>7 June 1995 (07.06.95)</td> <td>US</td> </tr> <tr> <td>476,542</td> <td>7 June 1995 (07.06.95)</td> <td>US</td> </tr> <tr> <td>486,217</td> <td>7 June 1995 (07.06.95)</td> <td>US</td> </tr> <tr> <td>482,285</td> <td>7 June 1995 (07.06.95)</td> <td>US</td> </tr> <tr> <td>484,209</td> <td>7 June 1995 (07.06.95)</td> <td>US</td> </tr> </table> <p>(71) Applicant: <b>COBE LABORATORIES, INC.</b> [US/US]; 14401 West 65th Way, Arvada, CO 80004 (US).</p> <p>(72) Inventors: <b>BAINBRIDGE</b>, Marlene, Adele; 14420 Kuehster Road, Littleton, CO 80127 (US). <b>BILODEAU</b>, Leon, E.; 646 West Easter Place, Littleton, CO 80120 (US). <b>BLAKESLEE</b>, Jeffrey, J.; 12571 West 84th Circle, Arvada, CO 80005 (US). <b>BRIERTON</b>, Mark, J.; 26 Tecoma Circle, Littleton, CO 80127 (US). <b>CORBIN</b>, Frank, III; 9703 West Arlington Avenue, Littleton, CO 80123 (US). <b>CRUZ</b>, Edward, V.; 3958 Greenwood Street, Newbury Park, CA 91320 (US). <b>DOLECEK</b>, Victor, D.; 6607 South Atchison Way, Englewood, CO 80111 (US). <b>GARRISON</b>, Denise, C.; 2230 Park County Road 72, Bailey, CO 80421 (US). <b>GORDON</b>, Timothy, M.; 8072 South Zephyr Street, Littleton, CO 80123 (US). <b>HEMPSTEAD</b>, Russell; 2960 Dover Drive, Boulder, CO 80303 (US). <b>HOARD</b>, David, W.; 4065 Park Drive, Carlsbad, CA 92008 (US). <b>HOLMES</b>, Brian, M.; 5705 Herzman Drive, Evergreen, CO 80439 (US). <b>KAPPUS</b>, John, J.; 851 Lafayette Street, Denver, CO 80217 (US). <b>LANGLEY</b>, Robert, W.; 10160 Xavier Court, Westminster, CO 80218 (US). <b>MENHENNETT</b>, Thomas, L.; 170 Cherrywood Lane, Louisville, CO 80027 (US). <b>MUDLOFF</b>, Frederick, S.; 509 West Sycamore Circle, Louisville, CO 80027 (US). <b>MURRAY</b>, Richard, E.; 85 Benthaven Place, Boulder, CO 80303 (US). <b>SHOULDICE</b>, David, R.; 1863 South Robb Street, Lakewood, CO 80232 (US). <b>STEELE</b>, Chad, C.; 10452 Jacob Place, Littleton, CO 80125 (US). <b>TOAVS</b>, Coy; 310 South Finch, Lafayette, CO 80026 (US). <b>WAHL</b>, Terry, R.; 5201 South Dayton Street, Englewood, CO 80111 (US).</p> <p>(74) Agent: <b>WINSOR</b>, Bruce, R.; Cobe Laboratories, Inc., 14401 West 65th Way, Arvada, CO 80004 (US).</p> <p>(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p>			480,617	7 June 1995 (07.06.95)	US	504,049	7 June 1995 (07.06.95)	US	486,012	7 June 1995 (07.06.95)	US	483,515	7 June 1995 (07.06.95)	US	483,574	7 June 1995 (07.06.95)	US	487,606	7 June 1995 (07.06.95)	US	476,542	7 June 1995 (07.06.95)	US	486,217	7 June 1995 (07.06.95)	US	482,285	7 June 1995 (07.06.95)	US	484,209	7 June 1995 (07.06.95)	US
480,617	7 June 1995 (07.06.95)	US																														
504,049	7 June 1995 (07.06.95)	US																														
486,012	7 June 1995 (07.06.95)	US																														
483,515	7 June 1995 (07.06.95)	US																														
483,574	7 June 1995 (07.06.95)	US																														
487,606	7 June 1995 (07.06.95)	US																														
476,542	7 June 1995 (07.06.95)	US																														
486,217	7 June 1995 (07.06.95)	US																														
482,285	7 June 1995 (07.06.95)	US																														
484,209	7 June 1995 (07.06.95)	US																														
<p>(54) Title: <b>EXTRACORPOREAL BLOOD PROCESSING METHODS AND APPARATUS</b></p>																																
<p>(57) Abstract</p> <p>An extracorporeal blood processing system is disclosed which includes a variety of novel components and which may be operated in accordance with a variety of novel methodologies. For instance, the system includes a graphical operator interface which directs the operator through various aspects of the apheresis procedure. Moreover, the system also includes a variety of features relating to loading a blood processing vessel into a blood processing channel and removing the same after completion of the procedure. Furthermore, the system also includes a variety of features relating to utilizing a blood priming of at least portions of the apheresis system in preparation for the procedure. In addition, the system includes a variety of features enhancing the performance of the apheresis system, including the interrelationship between the blood processing vessel and the utilization of high packing factors for the procedure.</p>																																

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgystan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## EXTRACORPOREAL BLOOD PROCESSING METHODS AND APPARATUS

### FIELD OF THE INVENTION

5 The present invention generally relates to the field of extracorporeal blood processing and, more particularly, to methods and apparatus which may be incorporated into an apheresis system (e.g., blood component collection, therapeutic).

### BACKGROUND OF THE INVENTION

10 One type of extracorporeal blood processing is an apheresis procedure in which blood is removed from a donor or patient, directed to a blood component separation device (e.g., centrifuge), and separated into various blood component types (e.g., red blood cells, white blood cells,  
15 platelets, plasma) for collection or therapeutic purposes. One or more of these blood component types are collected (e.g., for therapeutic purposes), while the remainder are returned to the donor or patient.

A number of factors affect the commercial viability of  
20 an apheresis system. One factor relates to the operator of the system, specifically the time and/or expertise required of an individual to prepare and operate the apheresis system. For instance, reducing the time required by the operator to load and upload the disposables, as well as the  
25 complexity of these actions, can increase productivity and/or reduce the potential for operator error. Moreover, reducing the dependency of the system on the operator may lead to reductions in operator errors and/or to reductions

- 2 -

in the credentials desired/required for the operators of these systems.

Donor-related factors may also impact the commercial viability of an apheresis system and include donor convenience and donor comfort. For instance, donors typically have only a certain amount of time which may be committed to visiting a blood component collection facility for a donation. Consequently, once at the collection facility the amount of the donor's time which is actually spent collecting blood components is another factor which should be considered. This also relates to donor comfort in that many view the actual collection procedure as being somewhat discomfoting in that at least one and sometimes two access needles are in the donor throughout the procedure.

Performance-related factors continue to affect the commercial viability of an apheresis system. Performance may be judged in terms of the "collection efficiency" of the apheresis system, which may in turn reduce the amount of donation time and thus increase donor convenience. The "collection efficiency" of a system may of course be gauged in a variety of ways, such as by the amount of a particular blood component type which is collected in relation to the number of this blood component type which passes through the apheresis system. Performance may also be evaluated based upon the effect which the apheresis procedure has on the various blood component types. For instance, it is desirable to minimize the adverse effects on the blood



- 3 -

component types as a result of the apheresis procedure (e.g., reduce platelet activation).

#### SUMMARY OF THE INVENTION

The present invention generally relates to  
5 extracorporeal blood processing. Since each of the various  
aspects of the present invention may be incorporated into  
an apheresis system (e.g., whether for blood component  
collection in which "healthy" cells are removed from the  
blood or for therapeutic purposes in which "unhealthy"  
10 cells are removed from the blood), the present invention  
will be described in relation to this particular  
application. However, at least certain of the aspects of  
the present invention may be suited for other  
extracorporeal blood processing applications and such are  
15 within the scope of the present invention.

An apheresis system which may embody one or more  
aspects of the present invention generally includes a blood  
component separation device (e.g., a membrane-based  
separation device, a rotatable centrifuge element, such as  
20 a rotor, which provides the forces required to separate  
blood into its various blood component types (e.g., red  
blood cells, white blood cells, platelets, and plasma)).  
In one embodiment, the separation device includes a channel  
which receives a blood processing vessel. Typically, a  
25 healthy human donor or a patient suffering from some type  
of illness (donor/patient) is fluidly interconnected with  
the blood processing vessel by an extracorporeal tubing

- 4 -

circuit, and preferably the blood processing vessel and extracorporeal tubing circuit collectively define a closed, sterile system. When the fluid interconnection is established, blood may be extracted from the donor/patient and directed to the blood component separation device such that at least one type of blood component may be separated and removed from the blood, either for collection or for therapy.

A first aspect of the present invention relates to enhancing the ease of loading a blood processing vessel into a channel which is associated with a centrifuge rotor. In one embodiment of this first aspect, the centrifuge rotor includes a blood processing vessel loading aperture in its sidewall which extends only part of the way through the centrifuge rotor and then extends upwardly through the top of the centrifuge rotor. The centrifuge rotor thereby provides an opposing surface to the portion of the loading aperture which may be characterized as laterally extending. The loading aperture within the centrifuge rotor may then be properly characterized as being substantially L-shaped. When the disposable blood processing vessel is inserted into this opening, it is deflected upwardly through the centrifuge rotor. The operator may then grasp the blood processing vessel and load it into the channel.

Another embodiment of this first aspect relates to a drive assembly for a centrifuge rotor assembly. The rotor assembly includes a rotor housing, a channel mounting having a channel associated therewith, and a single gear

- 5 -

which rotatably interconnects the rotor housing and channel mounting. Through use of this single gear and by having this single gear be radially offset in relation to the above-described loading aperture in the centrifuge rotor, the access to the loading aperture is not substantially affected by the drive assembly for the centrifuge rotor. For instance, by radially offsetting the single drive gear in relation to a plane which bisects the loading aperture, any counterweights which are used to establish rotational balance of the centrifuge rotor will be disposed so as to not adversely affect access to the loading aperture.

A second aspect of the present invention relates to the cross-sectional configuration of at least a portion of a channel associated with a channel housing which is interconnectable with a blood component separation device. Generally, the channel itself is configured so as to retain the blood processing vessel therein during the apheresis procedure. This is particularly desirable in the case of the blood component collection device being a centrifuge which is operated at high rotational speeds, such as greater than 2,500 RPM and even up to about 3,000 RPM. In one embodiment, for at least a portion of the length of the channel a lip extends partially across an upper portion of the channel.

The lip in this second aspect may be provided by configuring at least one of the inner and outer channel walls with a generally C-shaped cross-sectional configuration. In this case, both the upper and lower

- 6 -

portions of the channel having the noted lip would have reduced widths in comparison with the middle portion of the channel. These reduced width upper and lower portions of the channel may receive portions of a blood processing vessel which are sealed together. The channel configuration would then also serve to reduce the stresses experienced by these seals when the blood processing vessel is pressurized during the apheresis procedure.

A third aspect of the present invention relates to a blood processing vessel, and more specifically to a blood processing vessel which may be effectively loaded within a channel. In one embodiment of this third aspect, the blood processing vessel provides a continuous flow path by overlapping and radially off-setting first and second ends and utilizing first and second connectors. The first and second connectors are each positioned between the two ends of the blood processing vessel, communicate with the interior of the blood processing vessel, and when engaged facilitate the loading the blood processing vessel into the channel in the correct position. One of the connectors may be a stub-like structure which extends outwardly from the inner sidewall of the blood processing vessel, while the other connector may be a stub-like structure which extends outwardly from the outer sidewall of the blood processing vessel.

Another embodiment of this third aspect is a blood processing vessel which is particularly useful for the channel described in the second aspect above. In this

- 7 -

regard, the blood processing vessel is sufficiently rigid so as to not only be free-standing, but to be loaded into the channel of the second aspect as well. However, the blood processing vessel is still sufficiently flexible so as to be able to substantially conform to the shape of the channel during an apheresis procedure. This is particularly desirable when the channel is shaped to provide one or more desired functions regarding the apheresis procedure.

Once the blood processing vessel is loaded into the channel, at least the blood processing vessel must be primed. In this regard, a fourth aspect of the present invention relates to priming, preferably with blood. A channel associated with a channel housing, which is rotatably interconnected with a centrifuge rotor, includes a first cell separation stage. The first cell separation stage is sized such that a ratio of a volume of the channel which does not have RBCs to a volume of the channel which does have RBCs is no greater than one-half of one less than the ratio of the hematocrit of blood entering the channel to the hematocrit of red blood cells exiting the channel. With this configuration, blood may be used to prime the blood processing vessel when disposed within the channel, and thus the channel may be properly characterized as "blood-primable."

In one embodiment of this fourth aspect, the channel extends generally curvilinearly about a rotational axis of the channel housing in a first direction. The channel

- 8 -

includes, progressing in the first direction, the first cell separation stage, a red blood cell dam, a platelet collection area, a plasma collection area, and an interface control region for controlling a radial position of at least one interface between red blood cells and an adjacent blood component type(s) (e.g., a buffy coat of WBCs, lymphocytes, and platelets). Blood introduced into the channel is separated into layers of red blood cells, white blood cells, platelets, and plasma in the first cell separation stage. Preferably, throughout the apheresis procedure and including the priming of the blood processing vessel, only separated platelets and plasma flow beyond the red blood cell dam where the platelets may be removed from the channel in the platelet collection area. This is provided by an interface control mechanism which is disposed in the interface control region of the channel and which maintains the position of the interface between separated red blood cells and the buffy coat such that this condition is maintained.

Although the term "blood prime" is subject to a variety of characterizations, in each case blood is the first fluid introduced into the blood processing vessel. One characterization of the blood prime is that separated plasma is provided to the interface control region before any separated red blood cells flow beyond the red blood cell dam into the platelet collection area. Another characterization is that blood and/or blood component types occupy the entire fluid-containing volume of the blood

- 9 -

processing vessel before any separated red blood cells flow beyond the red blood cell dam into the platelet collection area.

One configuration of the channel which allows for a blood priming of the blood processing vessel when loaded within the channel is one in which the volume of that portion of the channel which principally contains plasma during the apheresis procedure is small in comparison to the volume of that portion of the channel which principally contains red blood cells during the apheresis procedure. This allows plasma to be provided to the interface control region of the channel before red blood cells flow beyond the red blood cell dam into the platelet collection stage to provide the red blood cell-buffy coat interface control function. That degree of "small" of the noted channel portion volume which allows for blood priming may be specifically defined in relation to a reference circle which has its origin on the rotational axis of the centrifuge housing and which intersects the channel at a predetermined location on the red blood cell dam. The volume of the channel which principally contains separated plasma in the apheresis procedure is disposed inside of this reference circle (e.g.,  $V_{PL}$ ) and the volume of the channel which principally contains separated red blood cells in the apheresis procedure is disposed outside of this reference circle (e.g.,  $V_{RBC}$ ). In one embodiment the ratio of  $V_{PL}/V_{RBC}$  is no greater than about 0.3, and preferably no greater than about 0.25. This desired ratio

- 10 -

may be achieved by having the width of the channel between the platelet collection area and the plasma collection area be less than the width of the channel throughout the first cell separation stage. By utilizing this reduced width, the configuration of the channel between the platelet collection area and the plasma collection area may utilize substantially vertically extending and planar inner and outer channel walls.

A fifth aspect of the present invention relates to priming a blood processing vessel disposed in a channel of a channel housing. Blood is used in the prime and the invention also accommodates for the removal of air from the blood processing vessel during this prime. A donor/patient blood transfer assembly fluidly interconnects the blood processing vessel and a donor/patient, and may include an air receptacle for receiving air which is displaced from the blood processing vessel by the blood priming. The various features associated with the channel of the above-noted fourth aspect of the invention may be utilized in this fifth aspect as well.

A sixth aspect of the present invention relates to blood priming an apheresis system which includes a channel housing having a blood processing channel associated therewith, a blood processing vessel disposed in the channel and which has a blood inlet port, red blood cell outlet port, and an interface control port. The interface control port is used to control the radial position of at least one interface between separated red blood cells and



- 11 -

a blood component type(s) disposed adjacent the separated red blood cells.

A method of this sixth aspect includes the steps of rotating the channel housing with the blood processing vessel positioned in its channel, introducing blood into the blood processing vessel to prime the same, and separating the blood into at least red blood cells, platelets, and plasma. The red blood cells are restricted from flowing beyond the red blood cell dam throughout the procedure, including in the priming of the blood processing vessel. In this regard, a flow of plasma is provided to the interface control port before any of the red blood cells are able to flow beyond the red blood cell dam. Once this plasma reaches the interface control port, control is established of the radial position of the interface between the separated red blood cells and the adjacent blood component type(s) such that the potential for red blood cells flowing beyond the red blood cell dam is reduced. One or more of the various features discussed above with regard to the fourth and fifth aspects noted above may be incorporated into this sixth aspect as well.

A seventh aspect of the present invention is a method which may be utilized to prime a blood processing vessel disposed in a channel of a channel housing with blood. In this method, the blood processing vessel is disposed in the channel on the channel housing and a donor/patient blood transfer assembly fluidly interconnects a donor/patient with this blood processing vessel. The method generally

- 12 -

includes the steps of initiating the flow of blood from the donor/patient to the donor/patient blood transfer assembly while rotating the channel housing at a first rotational velocity. Once the flow of blood reaches the blood processing vessel, the rotational velocity of the channel housing is increased to a second rotational velocity. Once the entirety of the blood processing vessel contains either blood and/or one or more blood component types, the rotational velocity of the channel housing is once again increased to a third rotational velocity. In one embodiment, the first rotational velocity ranges from about 180 RPM to about 220 RPM, and is preferably about 200 RPM, the second rotational velocity ranges from about 1,800 RPM to about 2,200 RPM and is preferably about 2,000 RPM, and the third rotational velocity ranges from about 2,700 RPM to about 3,300 RPM, and is preferably about 3,000 RPM. Although a three-step approach may be utilized in the practice of the method of this seventh aspect, the centrifuge speed need not stay at a fixed velocity during each of the three "stages" (e.g., the first stage being priming the extracorporeal circuit from the donor/patient to the blood processing vessel, the second stage being priming the blood processing vessel, and the third stage being the remainder of the apheresis procedure). One or more of the various features discussed above with regard to the fourth, fifth and sixth aspects noted above may be incorporated into this seventh aspect as well.

- 13 -

An eighth aspect of the invention relates to priming the apheresis system with blood. The apheresis system includes a channel housing having a channel associated therewith, a blood processing vessel disposed in the channel, a donor/patient blood transfer assembly which fluidly interconnects a donor/patient with the blood processing vessel and which includes a blood reservoir. A method in accordance with this eighth aspect includes performing first and second drawing steps. The first drawing step includes drawing blood from the donor/patient through a first portion of the donor/patient blood transfer assembly and into the blood reservoir. After this first drawing step is terminated, the blood processing vessel is primed with the donor/patient's blood by performing the second drawing step. The second drawing step includes drawing blood from the donor/patient, through a second portion of the donor/patient blood transfer assembly, through the blood processing vessel, and back into the blood reservoir. One or more of the various features discussed above with regard to the fourth, fifth, sixth, and seventh aspects noted above may be incorporated into this eighth aspect as well.

A ninth aspect of the present invention relates to the introduction of blood into the blood processing vessel such that the blood may be separated into at least two blood component types and further such that at least one of these blood component types may be removed from the blood processing vessel via a blood component outlet port. The

- 14 -

blood processing vessel includes two interconnected sidewalls (e.g, substantially planar surfaces which define the main body of the fluid-containing volume of the blood processing vessel) and the blood inlet port extends through one of these sidewalls. Generally, the blood exits the blood inlet port within the interior of the blood processing vessel in a direction which is at least partially in the direction of the primary flow of blood through the channel. This introduction of blood into the blood processing vessel is subject to a number of characterizations. For instance, the introduction may be characterized as the blood exiting the blood inlet port into the interior of the blood processing vessel at an angle of less than 90° relative to a reference line extending perpendicularly to the channel wall which interfaces with the blood inlet port. The introduction may be further characterized as exiting the blood inlet port in a direction which is substantially parallel with a direction of flow adjacent the blood inlet port. In one embodiment, red blood cells may actually flow along the outer wall of the blood processing vessel past the blood inlet port such that the noted introduction of blood into the blood processing vessel may be further characterized as reducing the potential for disturbing this flow of red blood cells and/or as reducing an effect on flow characteristics in the area of the blood processing vessel in which blood is introduced. The introduction may be further characterized as exiting the blood inlet port in a

- 15 -

direction which is substantially parallel with the sidewall of the blood processing vessel which interfaces with the blood inlet port.

A tenth aspect of the present invention relates to the removal of platelets from the blood processing vessel. This tenth aspect is based upon the blood processing vessel and part of the adjacent channel wall of the channel collectively defining a generally funnel-shaped blood component collect well which collects at least one blood component type flowing thereby (e.g., platelets). In one embodiment, the blood processing vessel includes a blood inlet port and a first blood component outlet port. A support is disposed proximate the blood component outlet port and exteriorly relative to the fluid-containing volume of the blood processing vessel. This support is contoured to direct the desired blood component type(s) toward the blood component outlet port and is in an overlapping relation with the exterior surface of the blood processing vessel. The support may be separable from the blood processing vessel such that it may be positioned between the blood processing vessel and the associated channel wall after the vessel is loaded into the channel. The support may also be fixedly interconnected with the blood processing vessel in some manner. For instance, the support may be pivotally or hingedly interconnected with the exterior of the blood processing vessel to facilitate loading of the blood processing vessel and/or to allow the support to move into a predetermined position upon

- 16 -

pressurization of the blood processing vessel during an apheresis procedure to perform the desired function. Moreover, the support may be integrally formed with the associated blood component outlet port.

5           In another embodiment relating to this tenth aspect, the channel includes inner and outer channel walls and part of a generally funnel-shaped blood component collect well is formed in at least one of these channel walls. That is, the remainder of the funnel-shaped blood component collect well is defined by the blood processing vessel, such as  
10 described above in relation to the first embodiment of this tenth aspect. In order to allow the above-described blood processing vessel to be effectively loaded into the blood processing channel, specifically one of its blood component  
15 outlet ports, a blood component outlet port recess extends radially beyond the portion of the blood component collect well defined by the channel wall (e.g., if the well is on the outer wall of the channel, this would be further  
20 radially outwardly, whereas, if the well is on the inner wall of the channel, this would be further radially inwardly). This recess may also be configured so as to allow the above-noted contoured support, which interfaces with the exterior of the blood processing vessel, to move  
25 into a predetermined position upon pressurization of the blood processing vessel to direct the desired blood component type(s) into the blood component collect port.

In another embodiment of this tenth aspect, a method for processing blood in an apheresis system includes the

- 17 -

steps of loading a blood processing vessel in a channel on a channel housing. A contoured support is disposed between the channel and the blood processing channel. When blood is introduced into the blood processing vessel and the channel housing is rotated to separate the blood into various blood component types, a generally funnel-shaped platelet collect well is defined by conforming one part of the blood processing vessel to the channel and by further conforming another part of the blood processing vessel to the shape of the support interfacing with the blood processing vessel. In order to further define this generally funnel-shaped platelet collect well, pressurization of the blood processing vessel may move the support into a predetermined position. For instance, this may then allow the support to direct the platelets toward a platelet collect port on the blood processing vessel.

An eleventh aspect of the present invention relates to a control port which assists in automatically controlling (i.e., without operator action) the location of an interface between red blood cells and a buffy coat relative to a red blood cell dam. The red blood cell dam restricts the flow of separated red blood cells to a platelet collect port. The control port extends through the blood processing vessel and removes plasma and red blood cells as required in order to reduce the potential for red blood cells flowing "over" the red blood cell dam to the platelet collect port. The "selective" removal of red blood cells from the blood processing vessel through the control port

- 18 -

function is based at least in part upon its position within the channel. That is, the automatic control provided at least in part by the control port is predicated upon the control port assuming a predetermined radial position within the channel. In order to facilitate achieving this predetermined radial position within the channel, the disposition of the control port is provided independently of the thickness of the blood processing vessel. Specifically, the position of the control port is not dependent upon the thickness of the materials which form the blood processing vessel.

The desired objective for the control of this eleventh aspect of the present invention may be affected by interconnecting a support or shield-like structure with the control port and disposing this support over an exterior surface of the blood processing vessel. This support may then be positioned against an interior surface of the channel, preferably within a recess which is specifically designed to receive the support. This support may also be more rigid than the blood processing vessel itself which reduces the potential for any significant change in the radial position of the control port when the blood processing vessel is pressurized (e.g., any radial movement within a slot which receives the control port and which allows the control port to extend within the channel). These support or shield-like members may also be used for other blood inlet/outlet ports on the blood processing vessel to similarly maintain the associated port in a



- 19 -

predetermined position and/or to reduce the discontinuity along the part of the channel with which the port interfaces.

5 A twelfth aspect of the present invention relates to a packing factor associated with the separated blood component types in a separation stage(s) of the blood processing vessel. The packing factor is a number which reflects the degree with which the blood component types are "packed together" in the separation stage(s) and is  
10 dependent at least upon the rotational speed of the channel housing and the flow rate into the blood processing vessel. The packing factor may be characterized as a dimensionless "density" of sorts of the blood component types in the separation stage(s).

15 One embodiment of this twelfth aspect is a method which includes the steps of rotating the channel housing, providing a flow to the blood processing (e.g., the flow includes blood and typically anticoagulant as well), separating the blood into a plurality of blood component  
20 types, and adjusting the rotational speed of the channel housing based upon a certain change in the flow rate. Since the packing factor is dependent upon the rotational speed of the channel housing and the flow rate into the blood processing vessel, the methodology of this eleventh  
25 aspect may be used to maintain a substantially constant and predetermined packing factor. In this regard, preferably the packing factor is maintained between about 11 and about 15, and preferably about 13.

- 20 -

Another embodiment of this twelfth aspect is a method for processing blood in an apheresis system in which a blood processing vessel is disposed in a channel of a channel housing. The method includes the steps of rotating the channel housing, providing a flow of blood (typically anticoagulated) to the blood processing vessel at a rate ranging from about 40 milliliters per minute to about 70 milliliters per minute, separating the blood into a plurality of blood component types in a first stage of the channel, and removing at least one of the blood component types from the blood processing vessel. Throughout the separating step, a packing factor of at least about 10, and more preferably at least about 10.2, is maintained in the first stage. For flow rates up to about 50 milliliters per minute, the packing factor is more preferably maintained at about 13 which may be achieved by rotating the channel housing at speeds greater than 2,500 RPM and typically closer to about 3,000 RPM.

Another embodiment of this twelfth aspect of the present invention relates to the configuration of a channel associated with a channel housing which is rotatably interconnected with a centrifuge rotor. The channel includes a first cell separation stage and a first blood component collection stage which are separated by a cell dam. At least one type of blood component is separated from remaining portions of the blood in the first cell separation stage and flows beyond the cell dam into the first blood component collection stage, while at least

- 21 -

one other type of blood component is preferably precluded from flowing beyond the cell dam into the first blood component collection stage. The width or sedimentation distance of the channel on the end of the first cell separation stage disposed closest to the cell dam is less than the width or sedimentation distance of the channel on the opposite end of the first cell separation stage. In one embodiment, the width/sedimentation distance of the channel in the first cell separation stage is progressively reduced approaching the cell dam. When the above-identified types of packing factors are utilized, this channel configuration may be used to reduce the volume of a buffy coat (white blood cells, lymphocytes, and platelets) between separated red blood cells and platelets in the first stage, and thus reduces the number of platelets that are retained within the first cell separation stage.

A thirteenth aspect of the present invention relates to the rinseback operation at the end of the apheresis procedure in which attempts are made to remove the remaining contents of the blood processing vessel and provide the same back to the donor/patient. In one embodiment, one or more ports of the blood processing vessel, which interface with the sidewall of the blood processing vessel, are configured in a manner which reduces the potential for any closure of the port(s) during the rinseback procedure due to interconnecting one or more pumps with these ports. The port(s) is configured so as to

- 22 -

have an orifice displaced from the radially outwardmost end of the port. This may be provided by configuring the end of the port to have the orifice positioned between two protrusions such that the orifice is recessed inwardly of the protrusions. Consequently, if the opposing portion of the blood processing vessel engages the protrusions during rinseback, the orifice is retained away from the blood processing vessel so as to not block the flow to the orifice.

In another embodiment relating to this thirteenth aspect, at least one narrowed portion within the blood processing vessel extends downwardly from at least one of the blood component outlet ports interfacing with the sidewall of the blood processing vessel toward a lower portion of the blood processing vessel. As such, during rinseback a drawing-like action, for instance achieved by pumping from the blood processing vessel out the blood component outlet port(s), is initiated in a lower portion of the blood processing vessel where the contents of the blood processing vessel will be if rotation of the channel housing is terminated during rinseback as preferred. A second narrowed portion may extend downwardly from the noted blood component outlet port such that one passageway extend away from the port in opposing directions and such that the drawing-like action is initiated in two displaced locations.

A fourteenth aspect of the present invention relates to facilitating insertion/loading and removal of a blood

- 23 -

processing vessel to and from, respectively, a channel associated with a channel housing upon completion of an apheresis procedure. Generally, the blood processing vessel may be removed from and loaded into the channel by engaging structure which does not have any flow therethrough during the apheresis procedure. This may be achieved by interconnecting at least one and preferably a plurality of tabs or the like with the blood processing vessel. These tabs extend beyond the fluid-containing volume of the blood processing vessel and preferably extend beyond the channel when the vessel is loaded within the channel. As such, the tab(s) may be grasped by the operator of the apheresis system to load and unload the blood processing vessel to/from the channel. These tabs or the like may be particularly useful when there is some resistance to insertion/removal of the blood processing vessel from the channel, such as when a lip is formed on the upper portion of the channel as discussed in relation to the second aspect.

A fifteenth aspect of the present invention relates to providing a graphical operator interface for the procedure. This graphical operator interface pictorially displays to the operator at least a portion of the steps for the apheresis procedure, at least one of which requires some type of operator action. These steps may be pictorially displayed in the order in which they are to be performed. In order to further enhance operator recognition of the ordering of the pictorially displayed apheresis steps, the

- 24 -

pictorials may also be numbered. Although the pictorials may alone convey to the operator the desired/required action, short textual descriptions may also be used in combination with the pictorials.

5           The pictorials may also be utilized to indicate the status of the apheresis procedure to the operator, such as by color or shade differentiation. For instance, three-way color or "shade" differentiation (e.g., in the case of colors using three different colors, and in the case of  
10   shade using the same general color but different levels of "darkness") may be utilized to indicate to the operator one of three conditions pertains to the step(s) associated with a particular pictorial. One color or shade may be utilized to indicate that the step(s) associated with the pictorial  
15   are untimely (e.g., not yet ready for execution), while another color or shade may be utilized to indicate that the step(s) associated with the pictorial are timely (e.g., ready for execution and/or are currently being executed), while yet another color or shade may be utilized to  
20   indicate that the step(s) associated with the pictorial have been executed. The status may also be conveyed by providing further indicia that the step(s) associated with a given pictorial have been completed. The pictorials may further function as an operator input device. For  
25   instance, touch screen principles may be utilized such that the operator will touch one of the pictorials on the display when the operator is ready to execute the step(s) associated with the pictorial. This touch screen

- 25 -

activation may generate one or more additional pictorials which graphically convey to the operator one or more steps or substeps which need to be undertaken at that particular time in the apheresis procedure.

5           A sixteenth aspect of the present invention also relates to an interface between the apheresis system and the operator. One embodiment of this sixteenth aspect is a method which includes the steps of instructing the apheresis system to address a first condition associated  
10 with the apheresis system by performing a first protocol. Typically, this "first condition" will be some type of problem associated with the apheresis system which may be resolved in a multiplicity of ways (e.g., at least two), such as by performing the first protocol or by performing  
15 a second protocol. That is, the methodology relates to "programming" the apheresis system to address or "correct" the first condition in one out of a plurality of ways and which does not allow/require the operator to make any decisions regarding how to address or "correct" the first  
20 condition.

          In this embodiment of the sixteenth aspect, the methodology includes the steps of introducing blood into a blood separation device, separating the blood into a plurality of blood component types, and removing at least  
25 one of the blood component types from the device. The methodology also includes the step of identifying the existence of the first condition relating to the apheresis system and thereafter having the apheresis system perform

- 26 -

the first protocol. This "identification" of the first condition may be based upon the operator observing the first condition and inputting information relating to the existence of the first condition to the apheresis system.

5 This methodology may be effectively integrated into and/or utilize the graphical interface discussed above in relation to the fifteenth aspect of the invention.

Another embodiment relating to this sixteenth aspect relates to the apheresis system utilizing the operator to  
10 address potential problems associated with the apheresis procedure. A method of this sixteenth aspect includes the steps of introducing blood to the blood separation device, separating the blood into a plurality of blood component types, and removing at least one of these blood component  
15 types from the blood separation device. The method further includes the step of detecting the potential existence of a "first condition" associated with the apheresis procedure. This "first condition" is typically some potential problem and may be detected by the system itself  
20 (e.g., through appropriate detectors/sensors/monitors), the operator, and/or the donor/patient. Once this first condition is detected, the operator is prompted by the apheresis system (e.g., via a computer interface) to perform an investigation of the system or a particular  
25 portion thereof. The operator is also prompted to specify the result of this investigation to the system. Based upon the operator's response to the investigation, the system may prompt the operator to take further action (e.g., to



- 27 -

address the first condition in a particular manner). Once again, this methodology may be effectively integrated into and/or utilize the graphical interface discussed above in relation to the fifteenth aspect of the invention.

5           A seventeenth aspect of the present invention relates to a disposable assembly for extracorporeal blood processing that utilizes a single pressure-sensing device to monitor positive and negative pressure changes in both the blood removal line and blood return line  
10           interconnectable with a donor/patient. In one embodiment, a pressure sensitive diaphragm member contacts blood on one side within a module of a molded cassette member, which cassette member may also include an integrally defined internal passageway fluidly interconnecting the module with  
15           both the blood removal and blood return lines. The use of a single pressure sensor reduces component costs and complexity, and yields significant accuracy advantages.

          An eighteenth aspect of the present invention further pertains to a disposable assembly for extracorporeal blood  
20           processing having a single needle for removal/return of whole blood/uncollected blood components, a reservoir fluidly interconnected to the single needle for accumulating blood components, and a gas holding means fluidly interconnected to the reservoir for receiving gas  
25           from the reservoir and returning the gas to the reservoir as the reservoir cyclically accumulates and disposes uncollected blood components during a blood processing operation. In one embodiment, the reservoir is integrally

- 28 -

defined within a molded cassette member. The provision of a gas holding means avoids a high internal pressure buildup as the reservoir is filled with returned blood components, thereby reducing gas entrainment at the liquid/gas interface and lowering the seal requirements for the reservoir and interconnected components.

A nineteenth aspect of the present invention relates to an extracorporeal blood processing device which includes a cassette member having a reservoir for accumulating uncollected blood components, and upper and lower ultrasonic sensors positionable adjacent to the reservoir and being responsive to the presence or absence, respectively, of fluid adjacent thereto within the reservoir to trigger the start and stop of blood return cycles. In a related aspect, each of the upper and lower ultrasonic sensors may advantageously comprise a contact surface for direct, dry-docking with the reservoir, thereby avoiding the need for the use of a docking gel or other like coupling medium. This nineteenth aspect may be further defined as follows:

1. A device for extracorporeal blood processing, comprising:

a cassette member having a reservoir for accumulating uncollected blood components in a first mode and for supplying said accumulated, uncollected blood components for return to a donor in a second mode separate from said first mode;

- 29 -

a first ultrasonic sensor positionable adjacent to an upper section of said reservoir, wherein said first ultrasonic sensor senses when uncollected blood components have accumulated to a predetermined first level in said reservoir and provides a first signal in response thereto, whereupon said first mode ends and said second mode is initiated; and

a second ultrasonic sensor positionable adjacent to a lower section of said reservoir, wherein said second ultrasonic sensor provides a second signal until it senses said uncollected blood components have been removed down to a predetermined second level in said reservoir, whereupon said second mode ends and said first mode is initiated.

2. A device as claimed in Claim 1 wherein:  
said reservoir is substantially rigid; and  
said first and second ultrasonic sensors each include a single transducer and resilient contact surface for direct, dry contact with said upper and lower sections of said reservoir.

3. A device as claimed in Claim 1, further comprising:

processor control means for receiving said first and second signals and controlling the initiation and end of said first and second modes in response thereto.

4. A device as claimed in Claim 1, wherein:  
said reservoir includes front and back surfaces, and an intermediate section, said intermediate section having a width from said front surface to said back surface that

- 30 -

is less than widths of said upper and lower sections from said front surface to said back surface.

5. A device for extracorporeal blood processing, comprising:

5 a cassette member having a reservoir, and having at least one blood component conduit means for transferring a separated first blood component adjoined thereto;

a first flexible tubing line interconnected at a first end to said blood component conduit means and extending  
10 outwardly from said cassette member, and interconnected at a second end to said reservoir;

a second flexible tubing line interconnected at a first end to said blood component conduit means and extending outwardly from said cassette member adjacent to  
15 said first flexible tubing line;

collection means interconnected to a second end of said second flexible tubing line; and

a valve assembly having a moveable member positioned between said first and second flexible tubing lines, and  
20 first and second contact surfaces, wherein in a first mode said moveable member and said first contact surface cooperate to close said first flexible tubing line and said separated first blood component flows through second flexible tubing line to said collection means, and wherein  
25 in a second mode separate from said first mode said moveable member and said second contact surface cooperate to close said second flexible tubing line and said

- 31 -

separated first blood component flows through said first flexible tubing line to said reservoir.

6. A device as claimed in Claim 5, further comprising:

5       detection means for detecting the presence of a second blood component different from said first blood component within said blood component conduit means, and for providing a signal in response thereto to and said first mode and initiate said second mode.

10       7. A device for extracorporeal blood processing, comprising:

15       a cassette member for transferring at least one of whole blood and blood components during use, and having a plurality of separate tubing loops extending outwardly therefrom;

      a plurality of separate flow control means for contacting corresponding ones of said tubing loops to control the flow of fluids therethrough during use;

20       at least one ultrasonic sensing means for sensing a predetermined parameter relating to said transfer of at least one of said whole blood and blood components through said cassette member during use;

25       a mounting means for selectively, securably and supportably receiving said cassette member in a substantially fixed position relative thereto, said mounting means being selectively moveable between first and second locations relative to said plurality of flow control means and said sensing means, wherein upon moving said

- 32 -

mounting means from said first to said second location, said plurality of tubing loops move into an operative position relative to said corresponding plurality of flow control means, and said cassette member moves into an operative position for operation of said ultrasonic sensing means whereupon said ultrasonic sensing means provides a corresponding signal.

8. A device for extracorporeal blood processing as claimed in Claim 7, said mounting means comprising:

10 a pivotable, spring-loaded member for engaging said cassette member, said pivotable, spring-loaded member being pivotable in said first location and being physically restricted from pivotable movement in said second location.

9. A device as claimed in Claim 5, said cassette member further having at least one U-shaped tubing loop extending outwardly therefrom, wherein said at least one U-shaped tubing loop has a tubing wall thickness that is greater than a tubing wall thickness of said second flexible tubing line.

20 10. A device as claimed in Claim 9, wherein said wall thickness of said at least one tubing loop is at least about 0.037 inches, and wherein said wall thickness of said second flexible tubing line is less than about 0.023 inches.

25 11. A device as claimed in Claim 5, wherein said second flexible tubing line has a wall thickness less than about 0.023 inch.

- 33 -

12. A device as claimed in Claim 11, wherein said second contact surface comprises a resilient material.

13. A device as claimed in Claim 5, said valve assembly including:

5       drive means for rotatably driving said movable member between first and second positions corresponding with said first and second modes of operation; and

10       indicator means interconnected with said drive means for synchronous rotational movement with said movable member; and

      optical sensor means for optically sensing the position of said indicator member and for providing an output signal employable in controlling said drive means.

- 34 -

14. A device for extracorporeal blood processing, comprising:

5 a cassette member for transferring at least one of whole blood and blood components during use, and having a plurality of separate tubing loops extending outwardly therefrom;

a plurality of separate flow control means for contacting corresponding ones of said tubing loops to control the flow of fluids therethrough during use;

10 at least one ultrasonic sensing means for sensing a predetermined parameter relating to said transfer of at least one of said whole blood and blood components through said cassette member during use;

15 a mounting means for selectively, securably and supportably receiving said cassette member in a substantially fixed position relative thereto, said mounting means being selectively moveable between first and second locations relative to said plurality of flow control means and said sensing means, wherein upon moving said  
20 mounting means from said first to said second location, said plurality of tubing loops move into an operative position relative to said corresponding plurality of flow control means, and said cassette member moves into an operative position for operation of said ultrasonic sensing  
25 means whereupon said ultrasonic sensing means provides a corresponding signal.



- 35 -

15. A device for extracorporeal blood processing as claimed in Claim 14, said mounting means comprising:

a pivotable, spring-loaded member for engaging said cassette member, said pivotable, spring-loaded member being  
5 pivotable in said first location.

16. A device as claimed in Claim 15, wherein at least one of said separate flow control means is positioned in predetermined relation relative to said cassette member, and wherein said pivotal, spring-loaded member is  
10 physically restricted from pivotal movement in said second location.

17. A device as claimed in Claim 14, further comprising:

drive means for moving mounting means between said  
15 first and second locations.

18. A device as claimed in Claim 17, said drive means including:

force limiting means for limiting the maximum amount of drive force providable by said drive means to said  
20 mounting means to a predetermined level.

19. A device as claimed in Claim 17, further comprising:

indicator means interconnected with said drive means synchronous movement with said mounting means; and

25 optical sensor means for optically sensing the position of said indicating means and providing an output signal employable in controlling said drive means.

- 36 -

20. A device as claimed in Claim 14, said cassette member further having a plurality of outwardly extending lips, and said mounting means further comprising a plurality of channel projections for receiving said plurality of lips.

21. A device for extracorporeal blood processing, comprising:

a molded cassette member having:

an integral internal fluid passageway in direct fluid communication with both a blood removal conduit means for transferring whole blood from a donor and a blood return conduit means for transferring uncollected blood components to a donor; and

a diaphragm member having an internal-facing side in fluid communication with said internal integral passageway and an external-facing side being externally accessible, said diaphragm member being positionally responsive to pressure changes in said blood removal conduit means and blood return conduit means; and

a pressure-sensing means positionable relative to said cassette member for air coupling with said external-facing side of said diaphragm member and for providing an output signal responsive to said pressure changes.

22. A device for extracorporeal blood processing as claimed in Claim 21, wherein one of said cassette member and said pressure-sensing means comprises an extending

- 37 -

portion and the other one of said cassette member and pressure-sensing means comprises a receiving portion, said extending portion and receiving portion being provided for mating engagement to establish said air coupling.

5           23. A device for extracorporeal blood processing as claimed in Claim 22, wherein an interfacing portion of at least one of said extending portion and said receiving portion comprises a resilient surface.

10           A twentieth aspect of the present invention relates to an extracorporeal blood processing device that comprises a cassette member having a reservoir, at least first and second flexible tubing lines adjacently interconnected to the cassette member in predetermined spaced relation, a collection means interconnected to one of the flexible  
15           tubing lines, and an interfacing valve assembly having a moveable member selectively positionable to occlude one of the tubings lines, such that in a first mode of operation a separated blood component will be collected in the collection means, and in a second mode of operation the  
20           separated blood component will be diverted into the reservoir. In one embodiment, multiple sets of corresponding first and second tubing lines/collection means/and valve assemblies are provided, with each of the sets providing for selective diversion of a blood component  
25           into a separate collection means or common reservoir. Utilization of this arrangement yields a compact disposable that can be readily mounted relative to the divert valve assemblies in a reliable manner.

- 38 -

A twenty-first aspect of the present invention relates to loading of a disposable cassette member having a plurality of tubing loops extending therefrom relative to a plurality of flow control devices and at least one sensing device for extracorporeal blood processing. A mounting means is employed for selectively, securably and supportably receiving the cassette member in a substantially fixed position relative thereto, and the mounting means is selectively moveable between first and second locations wherein upon moving the mounting means from the first to second location, the tubing loops move into an operative position with corresponding ones of the flow control devices and the cassette member moves into a proper position for operation of the sensing means. In one embodiment, the sensing means includes at least one pressure sensor for monitoring the fluid pressure within a blood removal passageway of the cassette member, and further includes ultrasonic sensors for monitoring the fluid level of accumulated, uncollected blood components within a reservoir of the cassette.

- 39 -

## BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view of one embodiment of an apheresis system;

5 Figs. 2A-2B illustrate an extracorporeal tubing circuit and cassette assembly thereof for the system of Fig. 1;

Fig. 3 is a front view of a pump/valve/sensor assembly for the system of Fig. 1;

10 Figs. 4A-4B are cross-sectional side views of first and second pressure-sensing modules of the extracorporeal tubing circuit of Figs. 2A-2B coupled with corresponding pressure sensors of the pump/valve/sensor assembly of Fig. 1;

15 Fig. 5 is a cross-sectional side view of the upper and lower ultrasound sensors of the pump/valve/sensor assembly of Fig. 3 coupled with a reservoir of the cassette assembly of the extracorporeal tubing circuit of Figs. 2A-2B;

20 Fig. 6 is a cross-sectional side view of a platelet divert valve subassembly of the pump/valve/sensor assembly of Fig. 3;

Fig. 7 is illustrates a loading assembly for a cassette mounting plate of the pump/valve/sensor assembly of Fig. 3;

25 Fig. 8 is an exploded, perspective view of the channel assembly from the system of Fig. 1;

Figs. 9-9B is a top view of the channel housing from the channel assembly of Fig. 8 illustrating various dimensions;

- 40 -

Fig. 10 is a cross-sectional view taken along line 10-10 of Fig. 9;

Fig. 11A is a cutaway, perspective view of the platelet collect well region of the channel housing of Fig. 8;

Fig. 11B is a lateral cutaway view, looking upwardly of the platelet collect well region of the channel housing of Fig. 8;

Fig. 12 is a cross-sectional view of the channel housing taken along line 12-12 in Fig. 9;

Fig. 13 is a cross-sectional view of the channel housing taken along line 13-13 in Fig. 9;

Fig. 14A is a top view of the blood inlet port slot, the RBC outlet slot, and the control port slot on the channel housing of Fig. 8;

Fig. 14B is a cutaway, perspective view of the whole blood inlet port slot region of the channel housing of Fig. 8;

Fig. 14C is a cutaway, perspective view of the control port slot region of the channel housing of Fig. 8;

Fig. 15 is a top view of the channel of Fig. 8 illustrating the ratio of the plasma volume to the red blood cell volume;

Fig. 16 is a perspective view of the blood processing vessel of the channel assembly of Fig. 8 in a disassembled state;

Fig. 17 is a cross-sectional view of the blood processing vessel at the interconnection;

- 41 -

Fig. 18 is cross-sectional view of the blood processing vessel taken along lines 18-18 in Fig. 16;

Fig. 19A is a cutaway, perspective view of the blood inlet port assembly for the blood processing vessel of Fig. 8;

Fig. 19B is a longitudinal cross-sectional view of the blood inlet port assembly for the blood processing vessel of Fig. 8;

Fig. 19C is a cross-sectional view of the blood inlet port assembly interfacing with the blood processing vessel of Fig. 8;

Fig. 19D is a perspective view of the interior of the vane of the blood inlet port of Fig. 19C;

Fig. 19E is a cutaway, perspective view of blood being introduced into the blood processing vessel of Fig. 8 during an apheresis procedure;

Fig. 19F is a cross-sectional view of blood being introduced into the blood processing vessel and channel of Fig. 8 during an apheresis procedure;

Fig. 19G is a cross-sectional view, looking downwardly, of blood being introduced into the blood processing vessel and channel of Fig. 8 during an apheresis procedure;

Fig. 20A is a cutaway, perspective view of the red blood cell outlet port assembly interfacing with the blood processing vessel of Fig. 8;

Fig. 20B is a longitudinal, cross-sectional view of the red blood cell outlet port assembly of Fig. 20A;

- 42 -

Fig. 20C is a cutaway, perspective view of the red blood cell port assembly interfacing with the blood processing vessel of Fig. 8 during rinseback at the end of an apheresis procedure;

5        Fig. 20D is a cross-sectional view, looking downwardly, of the red blood cell outlet port assembly interfacing with the blood processing vessel in the channel of Fig. 8 during rinseback at the end of an apheresis procedure;

10        Fig. 21A is a cross-sectional view of the platelet outlet port assembly for the blood processing vessel of Fig. 8;

Fig. 21B is a plan view of the platelet outlet port assembly of Fig. 21A from the interior of the channel;

15        Fig. 22 is a cutaway, perspective view of the plasma port assembly for the blood processing vessel of Fig. 8;

Fig. 23A is a cutaway, perspective view of the control port assembly for the blood processing vessel of Fig. 8;

20        Fig. 23B is a cross-sectional view of the control port assembly interfacing with the blood processing vessel of Fig. 8;

Fig. 24 is a perspective view of the centrifuge rotor assembly for the system of Fig. 1;

25        Fig. 25A is a longitudinal cross-sectional view of the rotor assembly of Fig. 24;

Fig. 25B is a top view of the rotor body of the rotor assembly of Fig. 24;



- 43 -

Fig. 25C is a top view of the rotor body of the rotor assembly of Fig. 24 with the upper counterweight removed so as to illustrate the lower counterweight;

Fig. 25D is a front view of the rotor body of Fig. 24;

5        Fig. 25E is a perspective view of the left side of the blood processing vessel aperture in the rotor body of Fig. 24;

Fig. 25F is a cross-sectional view of the rotor body of Fig. 24;

10        Fig. 26 is a "master screen" for the computer graphics interface of the apheresis system of Fig. 1;

Fig. 27 is a "loading procedures screen" for the computer graphics interface of the apheresis system of Fig. 1;

15        Fig. 28 is one embodiment of a "help screen" for the loading procedures screen of Fig. 27;

Fig. 29 is a "disposable pressure test screen" for the computer graphics interface of the apheresis system of Fig. 1;

20        Fig. 30 is a "pressure test in progress screen" for the computer graphics interface of the apheresis system of Fig. 1;

Fig. 31 is a "AC interconnect screen" for the computer graphics interface of the apheresis system of Fig. 1;

25        Fig. 32 is the "master screen" of Fig. 26 which has been updated to reflect completion of the loading of the disposables;

- 44 -

Fig. 33 is a "donor/patient data screen" for the computer graphics interface of the apheresis system of Fig. 1;

5 Fig. 34 is a "weight input screen" for the computer graphics interface of the apheresis system of Fig. 1;

Fig. 35 is a "lab data screen" for the computer graphics interface of the apheresis system of Fig. 1;

10 Fig. 36 is the "master screen" of Fig. 26 which as been updated to reflect completion of the donor/patient preps;

Fig. 37 is a first "donor/patient preps screen" for the computer graphics interface of the apheresis system of Fig. 1;

15 Fig. 38 is a second "donor/patient preps screen" for the computer graphics interface of the apheresis system of Fig. 1;

Fig. 39 is a "run screen" for the computer graphics interface of the apheresis system of Fig. 1;

20 Fig. 40 is one embodiment of an "alarm screen" for the computer graphics interface of the apheresis system of Fig. 1;

Fig. 41 is a "supplemental alarm screen" for the alarm screen of Fig. 40;

25 Fig. 42 is one embodiment of a "trouble shooting screen" for the computer graphics interface of the apheresis system of Fig. 1;

- 45 -

Fig. 43 is a "final run data display screen" for the computer graphics interface of the apheresis system of Fig. 1;

Fig. 44 is a "rinseback screen" for the computer graphics interface of the apheresis system of Fig. 1;

Fig. 45 is an "unload screen" for the computer graphics interface of the apheresis system of Fig. 1;

#### DETAILED DESCRIPTION

The present invention will be described in relation to the accompanying drawings which assist in illustrating the pertinent features thereof. Generally, all aspects of the present invention relate to improvements in a blood apheresis system, both procedural and structural. However, certain of these improvements may be applicable to other extracorporeal blood processing applications and such are within the scope of the present invention as well.

A blood apheresis system 2 is illustrated in Fig. 1 and allows for a continuous blood component separation process. Generally, whole blood is withdrawn from a donor/patient 4 and is provided to a blood component separation device 6 where the blood is separated into the various component types and at least one of these blood component types is removed from the device 6. These blood components may then be provided for subsequent use by another or may undergo a therapeutic treatment and be returned to the donor/patient 4.

- 46 -

In the blood apheresis system 2, blood is withdrawn from the donor/patient 4 and directed through a disposable set 8 which includes an extracorporeal tubing circuit 10 and a blood processing vessel 352 and which defines a completely closed and sterile system. The disposable set 8 is mounted on the blood component separation device 6 which includes a pump/valve/sensor assembly 1000 for interfacing with the extracorporeal tubing circuit 10, and a channel assembly 200 for interfacing with the disposable blood processing vessel 352.

The channel assembly 200 includes a channel housing 204 which is rotatably interconnected with a rotatable centrifuge rotor assembly 568 which provides the centrifugal forces required to separate blood into its various blood component types by centrifugation. The blood processing vessel 352 is interfitted with the channel housing 204. Blood thus flows from the donor/patient 4, through the extracorporeal tubing circuit 10, and into the rotating blood processing vessel 352. The blood within the blood processing vessel 352 is separated into various blood component types and at least one of these blood component types (e.g., platelets, plasma, red blood cells) is continually removed from the blood processing vessel 352. Blood components which are not being retained for collection or for therapeutic treatment (e.g., red blood cells, white blood cells, plasma) are also removed from the blood processing vessel 352 and returned to the donor/patient 4 via the extracorporeal tubing circuit 10.

- 47 -

Operation of the blood component separation device 6 is preferably controlled by one or more processors included therein, and may advantageously comprise a plurality of embedded personal computers to accommodate interface with ever-increasing PC user facilities (e.g., CD ROM, modem, audio, networking and other capabilities). Relatedly, in order to assist the operator of the apheresis system 2 with various aspects of its operation, the blood component separation device 6 includes a graphical interface 660.

Disposable Set: Extracorporeal Tubing Circuit

As illustrated in Figs. 2A-2B, blood-primable extracorporeal tubing circuit 10 comprises a cassette assembly 110 and a number of tubing assemblies 20, 50, 60, 80, 90, 100 interconnected therewith. Generally, blood removal/return tubing assembly 20 provides a single needle interface between a donor/patient 4 and cassette assembly 110, and blood inlet/blood component tubing subassembly 60 provides the interface between cassette assembly 110 and blood processing vessel 352. An anticoagulant tubing assembly 50, platelet collection tubing assembly 80, plasma collection tubing assembly 90, and vent bag tubing subassembly 100 are also interconnected with cassette assembly 110. As will be appreciated, the extracorporeal tubing circuit 10 and blood processing vessel 352 are interconnected to combinatively yield a closed disposable for a single use.

The blood removal/return tubing assembly 20 includes a needle subassembly 30 interconnected with blood removal

- 48 -

tubing 22, blood return tubing 24 and anticoagulant tubing 26 via a common manifold 28. The needle subassembly 30 includes a needle 32 having a protective needle sleeve 34 and needle cap 36, and interconnect tubing 38 between  
5 needle 32 and manifold 28. Needle subassembly 30 further includes a D sleeve 40 and tubing clamp 42 positioned about the interconnect tubing 38. Blood removal tubing 22 may be provided with a Y-connector 44 interconnected with a blood sampling subassembly 46.

10           Cassette assembly 110 includes front and back molded plastic plates 112 and 114 (see Figs. 4A, 4B and 5) that are hot-welded together to define a rectangular cassette member 115 having integral fluid passageways. The cassette assembly 110 further includes a number of outwardly  
15 extending tubing loops interconnecting various integral passageways. The integral passageways are also interconnected to the various tubing assemblies.

Specifically, cassette assembly 110 includes a first integral anticoagulant passageway 120a interconnected with  
20 the anticoagulant tubing 26 of the blood removal/return tubing assembly 20. The cassette assembly 110 further includes a second integral anticoagulant passageway 120b and a pump-engaging, anticoagulant tubing loop 122 between the first and second integral anticoagulant passageways  
25 120a, 120b. The second integral anticoagulant passageway 120b is interconnected with anticoagulant tubing assembly 50. The anticoagulant tubing assembly 50 includes a spike drip chamber 52 connectable to an anticoagulant source,

- 49 -

anticoagulant feed tubing 54 and a sterilizing filter 56. During use, the anticoagulant tubing assembly 50 supplies anticoagulant to the blood removed from a donor/patient 4 to reduce or prevent any clotting in the extracorporeal tubing circuit 10.

Cassette assembly 110 also includes a first integral blood inlet passageway 130a interconnected with blood removal tubing 22 of the blood removal/return tubing assembly 20. The cassette assembly 110 further includes a second integral blood inlet passageway 130b and a pump-engaging, blood inlet tubing loop 132 between the first and second integral blood inlet passageways 130a, 130b. The first integral blood inlet passageway 130a includes a first pressure-sensing module 134 and inlet filter 136, and the second integral blood inlet passageway 130b includes a second pressure-sensing module 138. The second integral blood inlet passageway 130b is interconnected with blood inlet tubing 62 of the blood inlet/blood component tubing assembly 60.

Blood inlet tubing 62 is also interconnected with input port 392 of blood processing vessel 352 to provide whole blood thereto for processing, as will be described. To return separated blood components to cassette assembly 110, the blood inlet/blood component tubing assembly 60 further includes red blood cell(RBC)/plasma outlet tubing 64, platelet outlet tubing 66 and plasma outlet tubing 68 interconnected with corresponding outlet ports 492 and 520, 456, and 420 of blood processing vessel 352. The RBC/

- 50 -

plasma outlet tubing 64 includes a Y-connector 70 to interconnect tubing spurs 64a and 64b. The blood inlet tubing 62, RBC/plasma outlet tubing 64, plasma outlet tubing 68 and platelet outlet tubing 66 all pass through first and second strain relief members 72 and 74 and a braided bearing member 76 therebetween. This advantageously allows for a seal-less interconnection, as taught in U.S. Patent No. 4,425,112. As shown, multi-lumen connectors 78 can be employed in the various tubing lines.

Platelet outlet tubing 66 of the blood input/blood component tubing assembly 60 includes a cuvette 65 for use in the detection of red blood cells (via an interfacing RBC spillover detector provided on blood component separation device 6) and interconnects with a first integral platelet passageway 140a of cassette assembly 110. As will be appreciated, a transparent member could alternatively be integrated into cassette assembly 110 in fluid communication with first integral platelet passageway 140a to interface with an RBC spillover detector.

The cassette assembly 110 further includes a pump-engaging, platelet tubing loop 142 interconnecting the first integral platelet passageway 140a and a second integral platelet passageway 140b. The second integral platelet passageway 140b includes first and second spurs 144a and 144b, respectively. The first spur 144a is interconnected with platelet collection tubing assembly 80.

The platelet collection tubing assembly 80 can receive separated platelets during operation and includes platelet



- 51 -

collector tubing 82 and platelet collection bags 84 interconnected thereto via a Y-connector 86. Slide clamps 88 are provided on platelet collector tubing 82.

5 The second spur 144b of the second integral platelet passageway 140b is interconnected with platelet return tubing loop 146 of the cassette assembly 110 to return separated platelets to a donor/patient 4 (e.g., upon detection of RBC spillover during platelet collection). For such purpose, platelet return tubing loop 146 is  
10 interconnected to the top of a blood return reservoir 150 integrally formed by the molded front and back plates 112, 114 of cassette member 115. As will be further described, one or more types of uncollected blood components, collectively referred to as return blood, will cyclically  
15 accumulate in and be removed from reservoir 150 during use. Back plate 114 of the cassette member 115 also includes an integral frame corner 116 defining a window 118 through a corner of cassette member 115. The frame corner 116 includes keyhole recesses 119 for receiving and orienting  
20 the platelet collector tubing 82 and platelet return tubing loop 146 in a predetermined spaced relationship within window 118.

The plasma outlet tubing 68 of blood inlet/blood component tubing assembly 60 interconnects with a first  
25 integral plasma passageway 160a of cassette assembly 110. Cassette assembly 110 further includes a pump-engaging, plasma tubing loop 162 interconnecting the first integral plasma passageway 160a and a second integral plasma

- 52 -

passageway 160b. The second integral plasma passageway 160b includes first and second spurs 164a and 164b. The first spur 164a is interconnected to the plasma collection tubing assembly 90.

5           The plasma collection tubing assembly 90 may be employed to collect plasma during use and includes plasma collector tubing 92 and plasma collection bag 94. A slide clamp 96 is provided on plasma collector tubing 92.

10           The second spur 164b of the second integral plasma passageway 160b is interconnected to a plasma return tubing loop 166 to return plasma to donor/patient 4. For such purpose, the plasma return tubing loop 166 is interconnected to the top of the blood return reservoir 150 of the cassette assembly 110. Again, keyhole recesses 119  
15           in the frame 116 of cassette assembly 110 are utilized to maintain the plasma collector tubing 92 and plasma return tubing loop 166 in a predetermined spaced relationship within window 118.

20           The RBC/plasma outlet tubing 64 of the blood inlet/blood component tubing assembly 60 is interconnected with integral RBC/plasma passageway 170 of cassette assembly 110. The integral RBC/plasma passageway 170 includes first and second spurs 170a and 170b, respectively. The first spur 170a is interconnected with  
25           RBC/plasma return tubing loop 172 to return separated RBC/plasma to a donor/patient 4. For such purpose, the RBC/plasma return tubing loop 172 is interconnected to the top of blood return reservoir 150 of the cassette assembly

- 53 -

110. The second spur 170b may be closed off as shown, or may be connected with an RBC/plasma collection tubing assembly (not shown) for collecting RBC/plasma during use. The RBC/plasma return tubing loop 172 (and RBC/plasma collector tubing if provided) is maintained in a desired orientation within window 118 by keyhole recesses 119 of the frame 116.

Vent bag tubing assembly 100 is also interconnected to the top of blood return reservoir 150 of cassette assembly 110. The vent bag tubing assembly 100 includes vent tubing 102 and a vent bag 104. During use, sterile air present since packaging within cassette assembly 110, and particularly within blood return reservoir 150, cyclically passes into and back out of vent tubing 102 and vent bag 104, as will be further described.

Vent bag 94 may be provided with a sterile, gas pressure-relief valve at a top end (not shown). Further, it should be noted that, as opposed to vent bag tubing assembly 100, additional integral passageways, integrated chambers and tubing loops could be included in cassette assembly 110 to perform the same functions as the vent bag tubing assembly 100.

The platelet return tubing loop 146, plasma return tubing loop 166 and RBC/plasma return tubing loop 172 are interconnected in a row to the top of blood return reservoir 150 immediately adjacent to forwardly projecting sidewalls 152 thereof so that the blood components returned thereby will flow down the inner walls of the blood return

- 54 -

reservoir 150. The blood return reservoir 150 includes an enlarged, forwardly projecting mid-section 154, a reduced top section 156 and reduced bottom section 158 (see also Fig. 5). A filter 180 is disposed in a bottom cylindrical outlet 182 of the blood return reservoir 150.

A first integral blood return passageway 190a is interconnected to the outlet 182 of blood return reservoir 150, and is further interconnected to a second integral blood return passageway 190b via a pump-engaging, blood return tubing loop 192. The second integral blood return passageway 190b is interconnected with the blood return tubing 24 of the blood removal/return tubing assembly 20 to return blood to the donor/patient 4 via needle assembly 30.

As illustrated in Figs. 2A-2B, pump-engaging tubing loops 122, 132, 142, 162 and 192 extend from cassette member 115 to yield an asymmetric arrangement thereby facilitating proper mounting of cassette assembly 110 on blood component separation device 6 for use. Relatedly, to further facilitate loading of cassette assembly 110, it is noted that the back plate 114 of cassette member 115 is preferably molded to present a shallow pan-shaped back having a rim extending around the entire periphery and around window 118, the edge of the rim being substantially coplanar with the back surface of the top, mid and bottom sections 154, 156, 158 of reservoir 150 and further defining a recessed region within which first and second pressure-sensing modules 134 and 138 project.

- 55 -

Tubing assemblies 20, 50, 60, 80, 90 and 100 and cassette assembly 110 preferably comprise PVC tubing and plastic components that permit visual observation and monitoring of blood/blood components therewithin during use. Further, it should be noted that thin-walled PVC tubing (e.g., less than about 0.023 inch) may be advantageously employed for approved, sterile docking (i.e., the direct connection of two pieces of tubing) for platelet collector tubing 82 and plasma collector tubing 92 and RBC/plasma collector tubing, if provided. Thicker-walled PVC tubing (e.g., about 0.037 inch or more) is preferably utilized for pump-engaging tubing loops 132, 142, 162 and 192.

#### Pump/Valve/Sensor Assembly

As noted, cassette assembly 110 is mounted upon and operatively interfaces with the pump/valve/sensor assembly 1000 of blood component separation device 6 during use. The pump/valve/sensor assembly 1000 is angled upward at about 45° (see Fig. 1) and as illustrated in Fig. 3 includes a cassette mounting plate 1010, and a number of peristaltic pump assemblies, flow divert valve assemblies, pressure sensors and ultrasonic level sensors interconnected to face plate 6a of blood collection device 6 for pumping, controlling and monitoring the flow of blood/blood components through extracorporeal tubing circuit 10 during use.

More particularly, anticoagulant pump assembly 1020 is provided to receive anticoagulant tubing loop 122, blood

- 56 -

inlet pump assembly 1030 is provided to receive blood inlet tubing loop 132, platelet pump assembly 1040 is provided to receive platelet tubing loop 142, plasma pump assembly 1060 is provided to receive plasma tubing loop 162, and blood  
5 return pump assembly 1090 is provided to receive blood return tubing loop 192. Each of the peristaltic pump assemblies 1020, 1030, 1040, 1060, and 1090 includes a rotor 1022, 1032, 1042, 1062 and 1092, and raceway 1024, 1034, 1044, 1064, and 1094 between which the corresponding  
10 tubing loop is positioned to control the passage and flow rate of the corresponding fluid.

Platelet divert valve assembly 1100 is provided to receive platelet collector tubing 82 and platelet return tubing loop 146, plasma divert valve assembly 1110 is  
15 provided to receive plasma collector tubing 92 and plasma return tubing loop 166, and RBC/plasma divert valve assembly 1120 is provided to receive RBC/plasma return tubing loop 172 and RBC/plasma collector tubing if provided. As noted above, each pair of tubing for  
20 collection or return of separated blood components is disposed in a predetermined spaced relationship within window 118 of cassette assembly 110, thereby facilitating loading relative to the corresponding divert valve assemblies. As will be further described, platelet divert  
25 valve assembly 1100, plasma divert valve assembly 1110 and RBC/plasma divert valve assembly 1120 each include a rotary occluding member 1400a, 1400b and 1400c that is selectively positionable between stationary occluding walls 1104 and

- 57 -

1106, 1114 and 1116, and 1124 and 1126, respectively, for diverting fluid flow through one tubing of the corresponding pairs of tubings.

Pressure sensors 1200 and 1260 (See also Figs. 4A and 4B) are provided within pump/valve/sensor assembly 1000 to operatively engage the first and second pressure-sensing modules 134 and 138 of cassette assembly 110 through openings 1120 and 1140 of cassette mounting plate 1100. Similarly, ultrasonic level sensors 1300 and 1320 (see also Fig. 5) are provided to operatively engage the blood return reservoir 150 cassette assembly 110 through openings 1160 and 1180 of cassette mounting plate 1100.

As shown in Figs. 4A and 4B, the first and second pressure-sensing modules 134, 138 of cassette assembly 110 each comprise a circular diaphragm 134a, 138a positioned on a raised cylindrical seat 134b, 138b formed into the back plate 114 of cassette assembly 110 with a ring-shaped, plastic diaphragm retainer 134c, 138c hot-welded to the raised cylindrical seats 134b, 138b to establish a seal therebetween. This arrangement allows the diaphragms 134a, 138b to be directly responsive to the fluid pressures within the first and second integral blood inlet passageways 130a, 130b, respectively, and pressure sensors 1200, 1260 to directly access the diaphragms 134a, 138a through the ring-shaped retainers 134c, 138c. By monitoring the diaphragms 134a, 138a, the pressure sensors 1200, 1260 can monitor the fluid pressure within the first and second integral blood inlet passageways 130a, 130b. In

- 58 -

this regard, it should also be noted that since first integral blood inlet passageway 130a is in direct fluid communication with blood removal tubing 22, and since blood removal tubing 22 and blood return tubing 24 are fluidly interconnected via the common manifold 28, the first pressure-sensing module 134 will be responsive to and first pressure sensor 1200 will actually sense the substantially common pressure in both the blood removal tubing 22 and blood return tubing 24 during operation.

With further regard to the first pressure-sensing module 134 and first pressure sensor 1200, Fig. 4A illustrates an air coupling arrangement that allows for the sensing of positive and negative pressure changes (i.e., causing outward and inward flexure of diaphragm 134a). To achieve an air seal between the first pressure sensor 1200 and first pressure-sensing module 134, the sensor 1202 includes a resilient (e.g., rubber), cone-shaped engaging member 1202. The engaging member 1202 is attached to an air channel member 1204 having a nipple-end 1206 that is received by beveled cylindrical extension 134d of retainer 134c. Air channel member 1204 further includes an outer, annular projecting channel portion 1208 that contains an O-ring 1210 for sealed sliding engagement of the air channel member 1204 within housing 1212. As illustrated, housing 1212 includes ears 1214 which interface with a floating positioning member 1216 secured to the face plate 6a of blood component separation device 6. As shown, a slight clearance is provided in such interface so as to permit



- 59 -

slight lateral movement of the engaging member 1202 and air channel member 1204 during loading of the cassette assembly 110. A threaded end 1218 of housing 1212 extends through the face plate 6a of blood component separation device 6 and receives nut 1220 thereupon, while leaving a slight clearance between the nut 1220 and face plate 6a. A spring 1222 is positioned within the housing 1212 and acts upon the annular channel portion 1208 of the air channel member 1204 to provide a spring-loaded interface between the first pressure sensor 1200 and first pressure-sensing module 134. Pressure-sensing transducer 1224 engages air channel member 1204 to sense positive and negative pressure changes within sensing module 134 and provide an output signal in response thereto during use. As will be further described, the output signal of pressure transducer 1224 can be employed to control the operation of blood inlet pump 1030 and blood return pump 1090 during operation.

With regard to the second pressure-sensing module 138 and the second pressure sensor 1260, Fig. 4B illustrates a direct contact coupling approach that allows for sensing of positive pressure changes (i.e., causing outward flexure of diaphragm 138a). Such contact coupling facilitates loading since the precise position of the diaphragm 138a relative to the second pressure sensor 1260 is not critical. As shown, second pressure sensor 1260 includes a projecting end portion 1262 that is received by the ring retainer 138c of sensing module 138 to directly contact diaphragm 138a. Pressure transducer 1264 is mounted relative to the face

- 60 -

plate 6a of the blood component separation device 6 via a ring 1266 that threadingly engages a portion of pressure transducer 1264 extending through the face plate 6a. Pressure transducer 1264 provides an output signal responsive to positive pressure changes acting upon diaphragm 138a.

As shown in Fig. 5, when cassette assembly 110 is mounted on pump/valve/sensor assembly 1000, the ultrasonic level sensors 1300 and 1320 will be positioned to monitor the fluid level in the blood return reservoir 150. More particularly, upper ultrasonic level sensor 1300 will be positioned in contact with the reduced top section 156 of blood return reservoir 150 and lower ultrasonic level sensor 1320 will be positioned in contact with the reduced bottom section 158 of blood return reservoir 150.

Ultrasonic sensors 1300, 1320 each comprise pulse/echo transducers 1302, 1322 having a contact surface (e.g., urethane) 1304, 1324 that facilitates divert dry coupling (i.e., without a gel or other like coupling medium) with the blood return reservoir 150. By way of example, ultrasonic sensors may comprise model Z-11405 transducers offered by Zevex Inc. of 5175 Greenpine Drive, Salt Lake City, Utah. Pulse/echo transducers 1302, 1322 are disposed within housings 1306, 1326 for interconnection with face plate 6a of the blood component separation device 6. Housings 1306, 1326 include a flange 1308, 1328 for engaging the front of face plate 6a, and further include a threaded end 1308, 1328 that extends through the face plate

- 61 -

6a to receive corresponding retaining nuts 1310, 1330. A slight clearance is provided for between flanges 1308, 1328 and face plate 6a. Springs 1312, 1332 are positioned within housings 1306, 1326 to act upon the corresponding pulse/echo transducers 1302, 1332 via E-clips 1314, 1334 disposed therebetween. Such spring loading of pulse/echo transducers 1302, 1332 yields a predetermined desired loading pressure for pulse/echo transducers 1302, 1332 relative to reservoir 150 during operation (e.g., at least about 5 lbs.). O-rings 1316, 1336 are provided intermediate pulse/echo transducers 1302, 1322 and housings 1306, 1326 to provide a sliding seal therebetween. Cables 1318, 1338 are interconnected to transducers 1302, 1322 to provide pulsing signals and return detected echo signals.

By gauging the presence and timing of return ultrasonic echo pulses each of sensors 1300 and 1320 can be employed to monitor the presence or absence of fluid within their corresponding echo regions within the blood return reservoir 150, and permit blood component separation device 6 to provide pump control signals in response thereto. More particularly, when return blood accumulates up into the echo region of upper level sensor 1300 during blood processing, ultrasonic pulses emitted by upper level sensor 1300 will readily pass through the return blood and reflect off of the opposing reservoir outside sidewall/air interface to yield echo pulses having a predetermined minimum strength that are detected by upper sensor 1300 within a predetermined time period after transmission.

- 62 -

When such echo pulses are received, upper sensor 1300 provides a signal that is used by blood component separation device 6 to initiate operation of blood return pump 1090 so as to remove accumulated return blood from the blood return reservoir 150 and transfer the same to the donor/patient 4.

When blood return pump 1090 has removed return blood from the reservoir 150 down into the lower echo region, ultrasonic pulses emitted by lower level sensor 1320 will not be reflected at the opposing reservoir outside sidewall/air interface to yield echo pulses having a predetermined minimum strength for detection by lower level sensor 1320 within a predetermined time period after transmission. When this occurs, lower level sensor 1320 will fail to provide corresponding signals to blood component separation device 6, and blood component separation device 6 will automatically stop blood return pump 1090 to stop further removal of return blood from the blood return reservoir 150, and return blood will again begin accumulating in reservoir 150. Thus, in the blood processing mode, blood component separation device 6 will not initiate operation of blood return pump 1090 unless and until it receives signals from upper ultrasonic sensor 1300 (the provisions of such signals indicating the presence of return blood in the upper echo region), and will thereafter automatically stop operation of blood return pump 1090 if it fails to receive signals from ultrasonic sensor 1320

- 63 -

(the failure to receive such signals indicating the absence of return blood in the lower echo region).

In an initial blood prime mode, whole blood is introduced to reservoir 150 from a donor/patient 4 through blood return tubing 24, integral passageways 190a, 190b, and tubing loop 192 via reverse operation of blood return pump 1090. When such whole blood accumulates up into the echo region of lower level sensor 1320, ultrasonic pulses emitted by lower level sensor 1320 will pass through the blood and reflect off of the opposing reservoir outside sidewall/air interface to yield echo pulses having a predetermined minimum strength that are detected by lower level sensor 1320 within a predetermined time period after transmission. When such echo pulses are received in the blood prime mode, lower level sensor 1320 provides a signal that is used by blood component separation device 6 to turn off blood return pump 1090 and end the blood prime mode. Blood component separation device 6 then initiates the blood processing mode.

It is contemplated that ultrasonic sensors 1300, 1320 can be utilized for indicating and/or confirming the desired mounting relationship of cassette member 15 on cassette mounting plate 1010 for blood processing operations. For such purposes, if the desired mounting has been achieved, the sensors 1300, 1320 should be coupled to reservoir 150 so that ultrasonic pulses reflect off the interface between the inside surface of the back sidewall of reservoir 150 (i.e., the sidewall contacted by the

- 64 -

sensors 1300, 1320) and contained air within reservoir 150, and be received with a predetermined minimum strength within a predetermined time period after transmission. If such echo pulses are received with respect to both  
5 ultrasonic sensors 1300, 1320, the desired loading relationship will be indicated and/or confirmed. Further, it is noted that ultrasonic sensors 1300, 1320 may be employable to sense echo pulses from the interfaces between fluid contained within the reservoir 150 and the inside  
10 surface of the outer sidewall of reservoir 150 in the upper and lower echo regions of the reservoir during operation. If such echo pulses are detectible within corresponding, predetermined time windows, corresponding signals provided by ultrasonic sensors 1300, 1320 can provide a further  
15 input for blood component separation device 6 to control operation of blood return pump 1090.

It should be noted that in the illustrated arrangement, the upper and lower ultrasonic sensors 1300 and 1320 advantageously operate via coupling with reduced  
20 cross-sectional portions 156 and 158 of reservoir 150. The reduced upper and lower reservoir portions 154, 158, accommodate reliable detection of echo pulses when fluid is present in the upper and lower echo regions, and the enlarged mid-portion 158 provides satisfactory return  
25 blood holding capabilities.

Fig. 6 shows the components of each of the platelet divert valve subassembly 1100, plasma divert valve subassembly 1100 and RBC/plasma divert valve subassembly

- 65 -

1120. Each subassembly includes a rotary occluder member 1400 having a headed shaft member 1402 and barrel sleeve 1404 positioned thereupon and rotatable relative thereto. The subassembly further comprises a main valve shaft 1406  
5 positioned within a valve body 1408 that is secured to face plate 6a of blood component separation device 6. An O-ring 1410 is provided in a recess on the main valve shaft 1406 to provide a sliding seal between main valve shaft 1406 and extensions 1412 of main valve body 1408. The main  
10 valve shaft 1406 is driven by a motor 1414 mounted on mount plate 1416 that in turn is mounted to and set off from face plate 6a by standoff legs 1418.

For positioning rotary occluder member 1400 for occlusion relative to one of the co-acting walls (e.g. 1104  
15 or 1106 of the plasma divert valve subassembly 1100) or for loading/removal of the cassette assembly 110 on the blood component separation device 6, each divert valve subassembly comprises three optical through-beam sensors 1420 (two shown) interconnected to standoff legs 1418 via  
20 support layer 1419, and an optical interrupter member 1422 interconnected to the main valve shaft 1406. Each through-beam sensor 1420 is of a U-shape configuration with a radiation source and radiation receiver disposed on opposing legs. The optical interrupter member 1422 has an  
25 inverted cup configuration with its sidewalls interposed and rotatable between the opposing legs of sensors 1420. The optical interrupter member 1422 includes a single window 1424 therethrough. As will be appreciated, the

- 66 -

position of the rotary occluder member 1400 relative to the window 1424 of the optical interrupter 1422 is known, such that when the optical window 1424 passes between the opposing radiation source/receiver for a given optical sensor 1420, the optical sensor 1420 will provide a signal in response to the through-beam (indicating the position of the rotary occluder member 1400), and the signal is employed to control the operation of motor 1414 to dispose rotary occluder member 1400 in the desired position. To provide/route such signals, the support layer 1419 may advantageously comprise a printed circuit board. Optical sensors 1420 are preferably positioned slightly "upstream" of predetermined stop regions for occlusion or cassette loading so that motor 1414 will be able to dynamically slow down and position rotary occluder member 1400 within such regions as desired. To insure the desired positioning for occlusion, however, stops 1426 are provided on main valve shaft 1406 to co-act with cross-pin 1428 interconnected to main valve shaft 1406 to insure stop positioning of rotary occluder member 1400 relative to the desired occluding wall.

Each of the occluding walls 1104 and 1106, 1114 and 1116, and 1124 and 1126, are provided with arcuate recesses (not shown) for receiving the rotatable barrel sleeve on 1404 of rotary occluder members 1400a, 1400b and 1400c. By way of example, such arcuate recesses may have an arc length of 20° and provide a tolerance range for positioning the rotary occluder members 1400a, 1400b, 1400c to achieve



- 67 -

the desired tubing occlusion. As illustrated in Fig. 3, occluding wall 1106 may be provided with a resilient pad to best accommodate the use of approved, sterile-docking tubing for platelet collector tubing 82. Further, and as  
5 noted above, sterile-docking tubing may be advantageously employed for plasma collector tubing 92 and, if provided, RBC/plasma collector tubing (not shown), and corresponding resilient pads (not shown) may be provided on occluding walls 1114 and 1124. In this regard, given the thinness  
10 and relatively high-spring rate of sterile-docking tubing, the use of resilient pads in connection therewith increases the wearability of the sterile docking tubing.

In order to establish an initial predetermined set position of the cassette assembly 110 relative to the  
15 pump/valve/sensor assembly 1000, the cassette assembly 110 includes downwardly extending corner positioning tabs 15 and top and bottom edge lips 17 that engage corresponding lower channel projections 1102a on cassette mounting plate 1010 and upper channel projections 1102b on a pivotable  
20 spring-loaded interlock member 1104 that extends across the top edge of cassette mounting plate 1010. The interlock member 1104 is spring-loaded to positively engage cassette assembly 110 upon loading via a spring positioned within housing 1106, and is provided with a tab 1108 for pivotable  
25 movement during cassette loading against the spring loading pressure. Preferably, interlock member 1104 is disposed relative to the raceway 1094 of return pump assembly 1090, such that when cassette assembly 110 is fully loaded for

- 68 -

operation on blood component separation device 6, raceway 1094 will physically restrict interlock member 1104 from being pivoted, thereby advantageously restricting removal and/or movement of cassette assembly 110 during use.

5           After cassette assembly 110 has been secured on the cassette mounting plate 1010, a loading assembly 1500 retracts the cassette mounting plate 1010 towards face plate 6a of the blood component separation device 6 to establish the above-noted, fully-loaded pump, valve and  
10           sensor relationships. As illustrated in Fig. 7, loading assembly 1500 includes two posts 1502 upon which cassette mounting plate 1010 is supportably interconnected. The posts 1502 extend through the face plate 6a of blood collection device 6a and are interconnected to a cross-  
15           connect member 1504. A drive nut 1506 is secured to cross-connect member 1504 and engages a drive screw 1508. The drive screw 1508 is in turn rotatably interconnected to a drive motor 1510 via coupling 1512, the drive motor 1510 being mounted on a platform 1514 which is supportively  
20           interconnected to face plate 6a via standoff legs 1516. The drive motor 1510 operates to turn drive screw 1508 so as to cause cross-connect member 1504 and posts 1502 to selectively move cassette mounting plate 1010 perpendicularly towards face plate 6a during loading  
25           procedures and perpendicularly away from face plate 6a for unloading of the cassette assembly 110.

To establish the desired position of cassette mounting plate 1010, U-shaped optical through-beam sensors 1520a and

- 69 -

1520b are mounted on post bearing holders 1522 and an optical occluder member 1524 having a window 1526 is interconnected to the cross-connect member 1504. Each of the U-shaped optical sensors 1520a, 1520b includes a radiation source and radiation receiver positioned on opposing extending legs, and the optical occluder member 1524 extends between such legs. Since the relative positions between cassette mounting plate 1010 and optical sensors 1520a, 1520b are known, by detecting the passage of radiation through window 1526 using optical sensors 1520, and providing a signal responsive thereto, the position of cassette mounting plate 1010 for loading and unloading can be automatically established. For example, when a through-beam is received by optical sensor 1520b, a signal will be provided to stop motor 1510 in a position wherein cassette assembly 110 will be fully loaded on the pump/valve/sensor assembly 1000 for operation.

To confirm such loaded condition, first and second pressure sensors 1200 and 1260 and upper and lower ultrasonic sensors 1300 and 1320 may be employed. For example, predetermined minimum pressure values can be established and actual pressures measured for each of the first and second pressure sensors 1200 and 1260 to confirm the desired loading of cassette assembly 110. Further, and of particular interest, ultrasonic sensors 1300 and 1320 can be advantageously employed to confirm the desired loading, since upon proper coupling to reservoir 150 echo pulses should be reflected off of the internal sidewall/air

- 70 -

interface with a predetermined minimum strength within a predetermined time period as noted above.

It should be noted that drive motor 1510 preferably includes a number of reduction gears with the last gear  
5 being operatively associated with a slip clutch plate to limit the maximum amount of force that may be applied by cassette mounting plate 1010 (e.g., to an object between cassette mounting plate 1010 and face plate 6a). Relatedly, it is preferable to include control capabilities  
10 wherein during a load cycle if the window 1526 of optical occluder 1524 has not moved from its position within the first optical pass through sensor 1520a to a position within the second optical pass through sensor 1520b within a predetermined time period, drive motor 1510 will  
15 automatically either stop or reverse operations.

To summarize the loading process, loading assembly 1500 initially disposes cassette mounting plate 1010 in an extended position. With the cassette mounting plate 1010 in such extended position, interlock member 1104 is pivoted  
20 away from cassette mounting plate 1010 and cassette assembly 110 is positioned on cassette mounting plate 1010 with bottom edge lips 17 of cassette assembly 110 being received by lower channel projections 1102a of cassette mounting plate 1010 and, upon return pivotal movement of  
25 interlock member 1104, top edge lips 17 of cassette assembly 110 being engaged by upper channel projections 1102b on interlock member 1104. Loading assembly 1500 is then operated to retract cassette mounting plate 1010 from

- 71 -

its extended position to a retracted position, wherein tubing loops 122, 132, 162, 142, 192 of cassette assembly 110 are automatically positioned within the corresponding peristaltic pump assemblies 1020, 1030, 1060, 1040 and 1090. For such purposes, the rotors of each of the peristaltic pump assemblies are also operated to achieve loaded positioning of the corresponding tubing loops. Further, it should be noted that for loading purposes, the rotary occluder members 1400a, 1400b and 1400c of the divert valve assemblies 1100, 1110 and 1120 are each positioned in an intermediate position so as to permit the corresponding sets of tubing to be positioned on each side thereof.

Upon retraction of the cassette mounting plate 1010, spring-loaded, ultrasonic sensors 1300 and 1320 will automatically be coupled to reservoir 150 and first and second pressure sensors 1200 and 1260 will automatically couple to first and second pressure-sensing modules 134 and 138 of cassette assembly 110. In this fully-loaded, retracted position, the cassette assembly 110 will be restricted from movement or removal by the above-noted physical restriction to pivotal movement of interlock member 1104 provided by raceway 1094 of return pump assembly 1090.

It is also noted that during loading of cassette assembly 110 on the blood component separation device 6, cuvette 65 is positioned within an RBC spillover detector 1600 (e.g., an optical sensor for detecting the presence of

- 72 -

any red blood cells in the separated platelet fluid stream and providing a signal response thereto) provided on the face plate 6a. Similarly, a portion of anticoagulant tubing 54 is positioned within an AC sensor 1700 (e.g., an ultrasonic sensor for confirming the presence of anticoagulant and providing a signal in the absence thereof) also provided in face plate 6a.

To unload cassette assembly 110 after use, the occluding members 1400a, 1400b and 1400c of each divert value assembly are again positioned in an intermediate position between the corresponding occluding walls and loading assembly 1500 is operated to move cassette mounting plate 1010 from its retracted position to its extended position. Contemporaneously, the rotors of the various peristaltic pump assemblies are operated to permit the corresponding tubing loops to exit the same. In the extended position, the interlock member 1104 is pivoted out of engagement with cassette assembly 110 and cassette assembly 110 is removed and disposed of.

Operation of Extracorporeal Tubing Circuit  
and Pump/Valve/Sensor Assembly

In an initial blood prime mode of operation, blood return pump 1090 is operated in reverse to transfer whole blood through blood removal/return tubing assembly 20, integral blood return passageway 190, blood return tubing loop 192 and into reservoir 150. Contemporaneously and/or prior to the reverse operation of blood return pump 1090, anticoagulant peristaltic pump 1020 is operated to prime

- 73 -

and otherwise provide anticoagulant from anticoagulant tubing assembly 50, through anticoagulant integral passageway 120, and into blood removal tubing 22 and blood return tubing 24 via manifold 28. When lower level  
5 ultrasonic sensor 1320 senses the presence of the whole blood in reservoir 150 a signal is provided and blood component separation device 6 stops blood return peristaltic pump 1090. As will be further discussed, during the blood prime mode blood inlet pump 1030 is also  
10 operated to transfer blood into blood inlet integral passageway 130, through blood inlet tubing loop 132 and into blood inlet/blood component tubing assembly 60 to prime the blood processing vessel 352.

During the blood prime mode, vent bag assembly 100  
15 receives air from reservoir 150. Relatedly, the occluding members 1400a, 1400b, 1400c of divert assemblies 1100, 1110, 1120 are each preferably positioned to divert flow to the reservoir 150. It should also be noted that to facilitate blood priming, the cassette assembly 110 is  
20 angled upward at about 45° in its loaded position, and the integral passageways of cassette member 115 are disposed so that all blood and blood component inlet paths provide for a bottom-to-top plug flow.

In the blood processing mode, the blood inlet  
25 peristaltic pump 1030, platelet peristaltic pump 1040 and plasma peristaltic pump 1060 are operated continuously, and the occluding members 1400a, 1400b, 1400c are positioned for collection or return of corresponding blood components,

- 74 -

as desired.. During a blood removal submode, blood return peristaltic pump 1090 is not operated so that whole blood will pass into blood removal/return tubing assembly 20 and transferred to processing vessel 352 via the cassette assembly 110 and blood inlet/blood component tubing assembly 60. In the blood removal submode, uncollected blood components are transferred from the processing vessel 352 to cassette assembly 110, and uncollected components are passed into and accumulate in reservoir 150 up to a predetermined level at which upper level ultrasonic sensor 1300 provides signals used by blood component separation device 6 to end the blood removal submode and initiate a blood return submode. More particularly, blood return submode is initiated by forward operation of blood return peristaltic pump 1090. In this regard, it should be appreciated that in the blood return submode the volume transfer rate of return blood through blood return tubing loop 192 utilizing blood return peristaltic pump 1090 is established by blood component separation device 6, according to a predetermined protocol, to be greater than the volume transfer rate through blood inlet tubing loop 132 utilizing blood inlet peristaltic pump 1030. As such, the accumulated blood in reservoir 150 is transferred into the blood return tubing of blood removal/return tubing assembly 20 and back into the donor/patient 4. During the blood processing mode, when the accumulated return blood in reservoir 150 is removed down to a predetermined level, lower level ultrasonic sensor 1320 will fail to provide



- 75 -

signals to blood component separation device 6, whereupon blood component separation device 6 will automatically stop blood return peristaltic pump 1090 to end the blood return submode. This automatically serves to reinitiate the blood removal submode since blood inlet peristaltic pump 1030 continuously operates.

During the blood processing mode, pressure sensor 1200 senses negative/positive pressure changes within the blood removal tubing 22 blood return tubing 26, via first integral blood inlet passageway 130a. Such monitored pressure changes are communicated to blood component separation device 6 which in turn controls blood inlet pump 1030 and return pump 1090 so as to maintain fluid pressures within predetermined ranges during the blood removal and the blood return submodes. Specifically during the blood removal submode, if a negative pressure is sensed that exceeds (i.e., is less than) a predetermined negative limit value, then blood component separation device 6 will slow down operation of blood inlet pump 1030 until the sensed negative pressure is back within an acceptable range. During the blood return submode, if a positive pressure is sensed that exceeds (i.e., is greater than) a predetermined positive limit value, then blood component separation device 6 will slow down operation of blood return pump 1090 until the sensed positive pressure is back within an acceptable range.

Pressure sensor 1260 monitors the positive pressure within the second integral blood inlet passageway 130b and

- 76 -

blood inlet tubing 62. If such sensed positive pressure exceeds a predetermined maximum value, blood component separation device 6 will initiate appropriate responsive action, including, for example, slowing or stoppage of the centrifuge and peristaltic pumps.

During the blood processing mode, blood component separation device 6 controls the operation of anticoagulant pump 1020 according to a predetermined protocol and responsive to signals provided by AC sensor 1700 (e.g., indicating a depleted anticoagulant source). Also, blood component separation device 6 also controls the operation of divert assemblies 1100, 1110, 1120 according to predetermined instructions and further pursuant to any detect signals provided by RBC spillover detector 1600. In the latter regard, if an RBC spillover in the separated platelet stream is detected, blood component separation device 6 will automatically cause occluder member 1400a to divert the separated platelet stream to the return reservoir 150 until the RBC spillover has cleared, thereby keeping red blood cells from undesirably passing into platelet collector tubing assembly 80.

In normal operation, whole blood will pass through needle assembly 30, blood removal tubing 22, cassette assembly 110 and blood inlet tubing 62 to processing vessel 352. As will be further described in detail, the whole blood will then be separated in vessel 352. A platelet stream will pass out of port 420 of the vessel, through platelet tubing 66, back through cassette assembly 110, and

- 77 -

will then be either collected in collector assembly 80 or diverted to reservoir 150. Similarly, separated plasma will exist vessel 352 through port 456 to plasma tubing 68 back through cassette assembly 110, and will then either be collected in platelet tubing assembly 90 or diverted to reservoir 150. Further, red blood cells and plasma (and potentially white blood cells) will pass through ports 492 and 520 of vessel 352 through RBC/plasma tubing 64, through cassette assembly 110 and into reservoir 150. In this regard, it is contemplated that second spur 170b of integral passageway 170 may be connected to a separate RBC/plasma collector tubing assembly (not shown) and RBC/plasma divert valve assembly 1120 could be operated for the collection of RBC/plasma.

As noted above, when uncollected platelets, plasma, and RBC/plasma (and potentially white blood cells) have accumulated in reservoir 150 up to upper ultrasonic level sensor 1300, operation of return peristaltic pump 1090 will be initiated to remove the noted components from reservoir 150 and transfer the same back to the donor/patient 4 via the return tubing 24 and needle assembly 20. When the fluid level in the reservoir 150 drops down to the level of the lower ultrasonic level sensor 1320, the return peristaltic pump 1090 will automatically turn off reinitiating the blood removal submode. The cycle between blood removal and blood return submodes will then continue until a predetermined amount of platelets or other collected blood components have been harvested.

- 78 -

In one embodiment, reservoir 150 and upper and lower ultrasonic sensors 1300 and 1320 are provided so that, during the blood processing mode, approximately 50 milliliters of return blood will be removed from reservoir 150 during each blood return submode and accumulated during each blood removal submode. Relatedly, in such embodiment, lower and upper level triggering by ultrasonic sensors 1300 and 1320 occurs at fluid volumes of about 15 milliliters and 65 milliliters, respectively, within reservoir 150. For such embodiment, it is also believed desirable to provide for a volume transfer operating rate range of about 30 to 300 milliliters/minute through blood return tubing loop 192 utilizing return pump 1090, and a volume transfer operating rate range of about 20 to 140 milliliters/minute through blood inlet tubing loop 132 utilizing inlet pump 1030. Additionally, for such embodiment a negative pressure limit of about -250 mmHg and positive pressure limit of about 350 mmHg is believed appropriate for controlling the speed of inlet pump 1030 and return pump 1090, respectively, in response to the pressures sensed in first pressure-sensing module 134. A positive pressure limit of about 1350 mmHg within second sensing module 138 is believed appropriate for triggering slow-down or stoppage of the centrifuge and pumps.

25

#### Channel Housing

The channel assembly 200 is illustrated in Figs. 8-23B and includes a channel housing 204 which is disposed on the rotatable centrifuge rotor assembly 568 (Figs. 1 and 24)

- 79 -

and which receives a disposable blood processing vessel 352. Referring more specifically to Figs. 8-15, the channel housing 204 has a generally cylindrically-shaped perimeter 206 with a diameter of preferably no more than about 10 inches to achieve a desired size for the blood component separation device 6 (e.g., to enhance its portability). An opening 328 extends longitudinally through the channel housing 204 and contains an axis 324 about which the channel housing 204 rotates. The channel housing 204 may be formed from materials such as delrin, polycarbonate, or cast aluminum and may include various cut-outs or additions to achieve weight reductions and/or rotational balance.

The primary function of the channel housing 204 is to provide a mounting for the blood processing vessel 352 such that the blood may be separated into the blood component types in a desired manner. In this regard, the channel housing 204 includes a generally concave channel 208 in which the blood processing vessel 352 is positioned. The channel 208 is principally defined by an inner channel wall 212, an outer channel wall 216 which is radially spaced from the inner channel wall 212, and a channel base 220 which is positioned therebetween. The channel 208 also extends from a first end 284 generally curvilinearly about a rotational axis 324 of the channel housing 204 to a second end 288 which overlaps with the first end 284 such that a continuous flow path is provided about the rotational axis 324. That is, the angular disposition

- 80 -

between the first end 284 of the channel 208 and the second end 288 of the channel 208 is greater than  $360^\circ$  and up to about  $390^\circ$ , and in the illustrated embodiment is about  $380^\circ$ . Referring to Fig. 15, this angular disposition is measured by the angle  $\beta$ , along a constant radius arc, between a first reference ray 336 which extends from the rotational axis 324 to the first end 284, and a second reference ray 340 which extends from the rotational axis 324 to the second end 288 of the channel 208.

The blood processing channel vessel 352 is disposed within the channel 208. Generally, the channel 208 desirably allows blood to be provided to the blood processing vessel 352 during rotation of the channel housing 204, to be separated into its various blood component types by centrifugation, and to have various blood component types removed from the blood processing vessel 352 during rotation of the channel housing 204. For instance, the channel 208 is configured to allow for the use of high packing factors (e.g., generally a value reflective of how "tightly packed" the red blood cells and other blood component types are during centrifugation and as will be discussed in more detail below). Moreover, the channel 208 also desirably interacts with the blood processing vessel 352 during centrifugation (e.g., by retaining the blood processing vessel 352 in the channel 208 and by maintaining a desired contour of the blood processing vessel 352). In addition, the channel 208 allows for a blood priming of the blood processing vessel

- 81 -

352 (i.e., using blood as the first liquid which is provided to the blood processing vessel 352 in an apheresis procedure).

5 The above-identified attributes of the channel 208 are provided primarily by its configuration. In this regard, the channel housing 204 includes a blood inlet slot 224 which is generally concave and which intersects the channel 208 at its inner channel wall 212 in substantially perpendicular fashion (e.g., the blood inlet slot 224  
10 interfaces with the inner channel wall 212). A blood inlet port assembly 388 to the interior of the blood processing vessel 352 is disposed in this blood inlet slot 224 such that blood from the donor/patient 4 may be provided to the blood processing vessel 352 when in the channel 208. In  
15 order to retain a substantially continuous surface along the inner channel wall 212 during an apheresis procedure and with the blood processing vessel 352 being pressurized, namely by reducing the potential for the blood inlet port assembly 388 deflecting radially inwardly within the blood  
20 inlet slot 224, a recess 228 is disposed on the inner channel wall 212 and contains the end of the blood inlet slot 224 (e.g., Fig. 14A). This recess 228 receives a shield 408 which is disposed about the blood inlet port assembly 388 on the exterior surface of the blood  
25 processing vessel 352 as will be discussed in more detail below.

As illustrated in Figs. 8-9, an RBC dam 232 of the channel 208 is disposed in a clockwise direction from the

- 82 -

blood inlet slot 224 and whose function is to preclude RBCs and other large cells such as WBCs from flowing in a clockwise direction beyond the RBC dam 232. Generally, the surface of the RBC dam 232 which interfaces with the fluid containing volume of the blood processing vessel 352 may be defined as a substantially planar surface or as an edge adjacent the collect well 236. At least in that portion of the channel 208 between the blood inlet port 224 and the RBC dam 232, blood is separated into a plurality of layers of blood component types including, from the radially outermost layer to the radially innermost layer, red blood cells ("RBCs"), white blood cells ("WBCs"), platelets, and plasma. The majority of the separated RBCs are removed from the channel 208 through an RBC outlet port assembly 516 which is disposed in an RBC outlet slot 272 associated with the channel 208, although at least some RBCs may be removed from the channel 208 through a control port assembly 488 which is disposed in a control port slot 264 associated with the channel 208.

The RBC outlet port slot 272 is disposed in a counterclockwise direction from the blood inlet slot 224, is generally concave, and intersects the channel 208 at its inner channel wall 212 in substantially perpendicular fashion (e.g., the RBC outlet slot 272 interfaces with the inner channel wall 212). An RBC outlet port assembly 516 to the interior of the blood processing vessel 352 is disposed in this RBC outlet slot 272 such that separated RBCs from the apheresis procedure may be continually



- 83 -

removed from the blood processing vessel 352 when in the channel 208 (e.g., during rotation of the channel housing 204). In order to retain a substantially continuous surface along the inner channel wall 212 during an apheresis procedure and with the blood processing vessel 352 being pressurized, namely by reducing the potential for the RBC outlet port assembly 516 deflecting radially inwardly within the RBC outlet slot 272, a recess 276 is disposed on the inner channel wall 212 and contains the end of the RBC outlet slot 272 (e.g., Figs. 14A, 14B). This recess 276 receives a shield 538 which is disposed about the RBC outlet port assembly 516 on the exterior surface of the blood processing vessel 352 as will be discussed in more detail below.

The control port slot 264 is disposed in a counterclockwise direction from the RBC outlet slot 272, is generally concave, and intersects the channel 208 at its inner channel wall 212 in substantially perpendicular fashion (e.g., the control port slot 264 interfaces with the inner channel wall 212). A control port assembly 488 to the interior of the blood processing vessel 352 is disposed in the control port slot 264 (e.g., Figs. 14A and C). In order to retain a substantially continuous surface along the inner channel wall 212 during an apheresis procedure and with the blood processing vessel 352 being pressurized, namely by reducing the potential for the control port assembly 488 deflecting radially inwardly within the control port slot 264, a recess 268 is disposed

- 84 -

on the inner channel wall 212 and contains the end of the control port slot 264. This recess 268 receives a shield 508 which is disposed about the control port assembly 488 on the exterior surface of the blood processing vessel 352 as will be discussed in more detail below.

The portion of the channel 208 extending between the control port slot 264 and the RBC dam 232 may be characterized as the first stage 312 of the channel 208. The first stage 312 is configured to remove primarily RBCs from the channel 208 by utilizing a reverse flow in relation to the flow of platelet-rich plasma through the channel 208 which is in a clockwise direction. In this regard, the outer channel wall 216 extends along a curvilinear path from the RBC dam 232 to the blood inlet slot 224 generally progressing outwardly away from the rotational axis 324 of the channel housing 204. That is, the radial disposition of the outer channel wall 216 at the RBC dam 232 is less than the radial disposition of the outer channel wall 216 at the blood inlet slot 224. The portion of the RBC outlet slot 272 interfacing with the channel 208 is also disposed more radially outwardly than the portion of the blood inlet slot 224 which interfaces with the channel 208.

In the first stage 312, blood is again separated into a plurality of layers of blood component types including, from the radially outermost layer to the radially innermost layer, red blood cells ("RBCs"), white blood cells ("WBCs"), platelets, and plasma. As such, the RBCs

- 85 -

sediment against the outer channel wall 216 in the first stage 312. By configuring the RBC dam 232 such that it is a section of the channel 210 which extends further inwardly toward the rotational axis 324 of the channel housing 204, this allows the RBC dam 232 to retain separated RBCs and other large cells as noted within the first stage 312. That is, the RBC dam 232 functions to preclude RBCs from flowing in a clockwise direction beyond the RBC dam 232.

Separated RBCs and other large cells as noted are removed from the first stage 312 utilizing the above-noted configuration of the outer channel wall 216 which induces the RBCs and other large cells as noted to flow in a counterclockwise direction (e.g., generally opposite to the flow of blood through the first stage 312). Specifically, separated RBCs and other large cells as noted flow through the first stage 312 along the outer channel wall 216, past the blood inlet slot 224 and the corresponding blood inlet port assembly 388 on the blood processing vessel 352, and to an RBC outlet slot 272. In order to reduce the potential for counterclockwise flows other than separated RBCs being provided to the control port assembly 488 disposed in the control port slot 264 (e.g., such that there is a sharp demarcation or interface between RBCs and plasma proximate the control port slot 264 as will be discussed in more detail below), a control port dam 280 of the channel 208 is disposed between the blood inlet slot 224 and the RBC outlet slot 272. That is, preferably no WBCs nor any portion of a buffy coat, disposed radially

- 86 -

adjacent to the separated RBCs, is allowed to flow beyond the control port dam 280 and to the control port slot 264. The "buffy coat" includes primarily WBCs, lymphocytes, and the radially outwardmost portion of the platelet layer. As  
5 such, substantially only the separated RBCs and plasma are removed from the channel 208 via the RBC control slot 264 to maintain interface control as noted.

The flow of RBCs to the control port assembly 488 is typically relatively small. Nonetheless, the ability for  
10 this flow is highly desired in that the control port assembly 488 functions in combination with the RBC outlet port assembly 516 to automatically control the radial position of an interface between separated RBCs and the "buffy coat" in relation to the RBC dam 232 by controlling  
15 the radial position of an interface between separated RBCs and plasma in relation to the control port assembly 488. The control port assembly 488 and RBC outlet port assembly 516 automatically function to maintain the location of the interface between the separated RBCs and the buffy coat at  
20 a desired radial location within the channel 208 which is typically adjacent the RBC dam 232 such that there is no spillover of RBCs or the buffy coat beyond the RBC dam 232. This function is provided by removing separated RBCs from the channel 208 at a rate which reduces the potential for  
25 RBCs and the other large cells as noted flowing beyond the RBC dam 232 and contaminating the platelet collection.

Separated platelets, which are disposed radially inwardly of the RBC layer and more specifically radially

- 87 -

inwardly of the buffy coat, flow beyond the RBC dam 232 with the plasma (e.g., via platelet-rich plasma) in a clockwise direction. A generally funnel-shaped platelet collect well 236 is disposed in a clockwise direction from the RBC dam 232 and is used to remove platelets from the channel 208 in the platelet-rich plasma. The configuration of the platelet collect well 236 is defined by only part of the outer channel wall 216. The portion of the platelet collect well 236 defined by the configuration of the outer channel wall 216 includes a lower face 240, a left side face 244, and a right side face 248. These faces 240, 244, 248 are each substantially planar surfaces and taper generally outwardly relative to the rotational axis 324 and inwardly toward a central region of the platelet collect well 236.

The remainder of the platelet collect well 236 is defined by the blood processing vessel 352 when loaded in the channel 208, namely a generally triangularly-shaped 428 which is disposed above the platelet outlet port assembly 416 to the interior of the blood processing vessel 352 and discussed in more detail below. A platelet support recess 249 extends further radially outwardly from those portions of the platelet collect well 236 defined by the configuration of the outer channel wall 216 and primarily receives the support 428 associated with the platelet collect port assembly 416. Generally, the upper portion of the support 428 is disposed below and engages an upper lip 252 of the platelet support recess 249, while portions of

- 88 -

the fourth face 444 of the support 428 are seated against the two displaced shoulders 252. This positions the support 428 when the blood processing vessel 352 is pressurized to direct platelets toward the platelet collect port assembly 416.

The outer channel wall 216 is further configured to receive the platelet collect tube 424. An upper platelet collect tube recess 254 and a lower platelet collect tube recess 255 are disposed yet further radially outwardly from the platelet support recess 249 to provide this function. As such, the platelet collect tube 424 may extend radially outwardly from the outer sidewall 376 of the blood processing vessel 352, extend upwardly through the lower platelet collect tube recess 255 and the upper platelet collect tube recess 254 behind or radially outwardly from the support 428, and extend above the channel housing 204.

Platelet-poor plasma continues to flow in a clockwise direction through the channel 208 after the platelet collect well 236 and may be removed from the channel 208. In this regard, the channel 208 further includes a generally concave plasma outlet slot 256 which is disposed proximate the second end 288 of the channel 208 and intersects the channel 208 at its inner channel wall 212 in substantially perpendicular fashion (e.g., the plasma outlet slot 256 interfaces with the inner channel wall 212). A plasma outlet port assembly 452 to the interior of the blood processing vessel 352 is disposed in this plasma outlet slot 256 such that plasma may be continually removed

- 89 -

from the blood processing vessel 352 during an apheresis procedure (e.g., during continued rotation of the channel housing 204). This plasma may be collected and/or returned to the donor/patient 4. In order to increase the number of platelets that are separated and removed from the vessel 352 in a given apheresis procedure, the configuration of the channel 208 between the platelet collect well 236 and the plasma outlet slot 256 may be such that platelets which separate from plasma in this portion of the channel 208 actually flow in a counterclockwise direction back towards the platelet collect well 236 for removal from the channel 208. This may be provided by configuring the outer channel wall 216 such that it extends generally curvilinearly about the rotational axis 324 from the platelet collect well 236 to the plasma outlet slot 256 progressing generally inwardly toward the rotational axis 324 of the channel housing 204. Consequently, the portion of the channel 208 including the platelet collect well 236 and extending from the platelet collect well 236 to the second end 288 may be referred to as a second stage 316 of the channel 208.

The channel 208 is also configured to provide platelet-poor plasma to the control port slot 264 and thus to the control port assembly 488 in order to assist in automatically controlling the interface between the RBCs and the buffy coat in relation to the RBC dam 232. In this regard, the first end 284 of the channel 208 is interconnected with the second end 288 of the channel 208 by a connector slot 260. With the first connector 360 and

- 90 -

second connector 368 of the blood processing vessel 352 being joined, they may be collectively disposed in this connector slot 260. As such, a continuous flowpath is provided within the blood processing vessel 352 and, for purposes of the automatic interface control feature, RBCs may flow to the control port slot 264 in a counterclockwise direction and plasma may flow to the control port slot 264 in a clockwise direction. The portion of the channel 208 extending from the first end 284 to the control port slot 264 may be referred to as a third stage 320 of the channel 208.

As noted above, the configuration of the channel 208 is desirable/important in a number of respects. As such, the dimensions of one embodiment of the channel 208 are provided herein and which may contribute to the functions of the channel 208 discussed below. The dimensions for one embodiment of the channel 208 are identified on Fig. 9B. All radius and thicknesses, etc., are expressed in inches.

One of the desired attributes of the channel 208 is that it facilitates the loading the of blood processing vessel 352 therein. This is provided by configuring the channel 208 to include a chamfer 210 on both sides of the channel 208 along the entire extent thereof. Generally, the chamfer 210 extends downwardly and inwardly toward a central portion of the channel 208 as illustrated, for instance, in Figs. 12-13. In embodiment, the angle of this chamfer 210 ranges from about 30° to about 60° relative to horizontal, and preferably is about 45°. Moreover, the



- 91 -

configuration of the channel 208 retains the blood processing vessel 352 within the channel 208 throughout the apheresis procedure. This is particularly relevant in that the channel housing 254 is preferably rotated a relatively high rotational velocities, such as about 3,000 RPM.

Another desirable attribute of the channel 208 is that it provides a self-retaining function for the blood processing vessel 352. The configuration of the channel 208 in at least the first stage 312, and preferably in the region of the platelet collect well 236 and in the region of the RBC dam 232 as well, is configured such that the upper portion of the channel 208 includes a restriction (e.g., such that the upper part of the channel 208 in this region has a reduced width in relation to a lower portion thereof). Although this configuration could also be utilized in the portion of the second stage 316 disposed between the platelet collect well 236 and the plasma outlet slot 256, in the illustrated embodiment the width or sedimentation distance of the channel 208 in this region is less than the width or sedimentation distance of the channel 208 throughout the entire first stage 312. This use of a "reduced width" can itself sufficiently retain the blood processing vessel 352 in the channel 208 in the "reduced-width" portion of the second stage 316 such that the inner channel wall 212 and outer channel wall 216 in this portion of the second stage 316 may be generally planar and vertically extending surfaces.

- 92 -

In the illustrated embodiment and as best illustrated in Fig. 12, the noted "restriction" in the channel 208 is provided by configuring the outer channel wall 216 with a generally C-shaped profile. In this portion of the channel 5 208, the channel 208 includes an upper channel section 292 having a first width, a mid-channel section 300 having a second width greater than the first width, and a lower channel section 304 having a width less than that of the mid-channel section 300 and which is typically equal to 10 that of the upper channel section 292. This profile is provided by an upper lip 296 which extends radially inwardly from the outer channel wall 216 toward, but displaced from, the inner channel wall 212, and by a lower lip 308 which extends radially inwardly from the outer 15 channel wall 216 toward, but displaced from, the inner channel wall 212. This lower lip 308 actually defines a portion of the channel base 220 but does extend entirely from the outer channel wall 216 to the inner channel wall 212 such that it defines a notch 218.

20 When the blood processing vessel 352 is loaded into the channel 208, the fluid-containing volume of the coinciding portion of the blood processing vessel 352 is disposed below the upper channel section 292 and is principally contained within the mid-channel section 300. 25 That is, the upper lip 296 "hangs over" the fluid-containing volume of the blood processing vessel 352 over at least a portion of its length. The upper lip 296 thereby functions to retain the blood processing vessel 352

- 93 -

within the channel 208 during rotation of the channel housing 204. Moreover, the upper lip 296 reduces the potential for creep by supporting the vessel 352 proximate the upper seal 380. The upper channel section 292 and the lower channel section 304 are multi-functional in that they also serve to receive and support an upper seal 380 and lower seal 384 of the blood processing vessel 352 to a degree such that the stresses induced on these portions of the blood processing vessel 352 during an apheresis procedure are reduced as will be discussed in more detail below. As can be appreciated, a similarly configured upper lip and lower lip could extend outwardly from the inner channel wall 212 toward, but displaced from, the outer channel wall 216, alone or in combination with the upper lip 296 and lower lip 308, and still retain this same general profile for the channel 208 to provide the noted functions.

Another desirable attribute of the channel 208 is that it allows for the use of blood as the liquid which primes the blood processing vessel 352 versus, for instance, saline solutions. Priming with blood allows for the actual collection of blood components to begin immediately (i.e., blood used in the prime is separated into blood component types, at least one of which may be collected). Blood priming is subject to a number of characterizations in relation to the apheresis system 2 and is based upon the configuration of the channel 208. For instance, the configuration of the channel 208 allows for blood to be the

- 94 -

first liquid introduced into the blood processing vessel 352 which is loaded in the channel 208. Moreover, the configuration of the channel 208 allows separated plasma to flow in a clockwise direction through the channel 208 and to reach the control port slot 264 (and thus the control port assembly 488 of the blood processing vessel 352) before any separated RBCs or any of the other noted large cells flow in the same clockwise direction beyond the RBC dam 232 and thus into the second stage 316 (i.e., a spillover condition). That is, blood priming may be utilized since control of the interface between the separated RBCs and the buffy coat is established before any RBCs or WBCs spill over into the second stage 316. Blood priming may also be characterized as providing blood and/or blood components to the entire volume of the blood processing vessel 352 prior to any RBCs or any of the other noted large cells flowing beyond the RBC dam 232 and into the second stage 316.

In order to achieve this desired objective of priming the blood processing vessel 352 with blood, generally the volume of the channel 208 which does not have RBCs to the volume of the channel 208 which does have RBCs must be less than one-half of one less than the ratio of the hematocrit of the RBCs leaving the channel 208 through the RBC outlet port assembly 516 to the hematocrit of the blood being introduced into the channel 208 through the blood inlet port assembly 388. This may be mathematically expressed as follows:

- 95 -

$V_2/V_1 < (H_{RP}/H_{IN} - 1)/2$ , where:

$V_2$  = the volume of the channel 208 containing only plasma or platelet-rich plasma;

$V_1$  = the volume of the channel 208 containing RBCs of the first stage 312 and third stage 320;

$H_{RP}$  = the hematocrit of the packed RBCs leaving the channel 208 through the RBC outlet port assembly 516; and

$H_{IN}$  = the hematocrit of the blood entering the channel 208 through the blood inlet port assembly 388.

This equation assumes that the hematocrit in the RBC volume and is calculated as  $(H_{in} + H_{RP}) / 2$ . In the case where the  $H_{IN}$  is equal to 0.47 and  $H_{RP}$  is equal to 0.75, this requires that the ratio of  $V_1/V_2$  be less than 0.30 in order for a blood prime to be possible.

The noted ratio may be further characterized as the ratio of that portion of the channel 208 which may be characterized as containing primarily plasma (e.g.,  $V_{PL}$ ) to the volume of that portion of the channel 208 which may be characterized as containing primarily RBCs (e.g.,  $V_{RBC}$ ). Referring to Fig. 15, these respective volumes may be defined by a reference circle 332 which originates at the rotational axis 324 and which intersects the RBC dam 232 at the illustrated location which would be at the border of a spillover condition. Portions of the channel 208 which are disposed outside of this reference circle 232 are defined

- 96 -

as that portion of the channel 208 which includes primarily RBCs or which defines  $V_{RBC}$  (e.g., about 77.85 cc in the illustrated embodiment), while those portions of the channel 208 which are disposed inside of the reference circle 232 are defined as that portion of the channel 208 which includes primarily plasma or which defines  $V_{PL}$  (e.g., about 19.6 cc in the illustrated embodiment). In the illustrated embodiment, the ratio of  $V_{PL}/V_{RBC}$  is about 0.25 which is less than that noted above for the theoretical calculation for the blood prime (i.e., 0.30 based upon comparison of the hematocrits). In order to further achieving the noted desired ratio, the width and height of the channel 208 throughout that portion of the second stage 316 disposed in a clockwise direction from the platelet collect well 236, also in third stage 320, are each less than the width and height of the channel 208 throughout the entire first stage 312.

Another important feature relating to the configuration of the channel 208 is that the radially inwardmost portion of the inner channel wall 212 is at the interface with the plasma outlet slot 256. That is, the entirety of the inner channel wall 212 slopes toward the plasma outlet slot 256. This allows any air which is present in the blood processing vessel 352 during priming to be removed from the blood processing vessel 352 through the plasma outlet slot 256 and more specifically the plasma outlet port assembly 452 since the air will be the least

- 97 -

dense fluid within the blood processing vessel 352 at this time.

Another desirable attribute of the channel 208 is that it contributes to being able to utilize a high packing factor in an apheresis procedure. A "packing factor" is a dimensionless quantification of the degree of packing of the various blood component types in the first stage 312 and is thus reflective of the spacings between the various blood component types. The packing factor may thus be viewed similarly to a theoretical density of sorts (e.g., given a quantity of space, what is the maximum number of a particular blood component type that can be contained in this space).

The packing factor is more specifically defined by the following equation:

$$PF = \omega^2 \times R \times (v_{RBC}/W) \times V/Q_{IN}, \text{ where:}$$

PF = packing factor;

$\omega$  = rotational velocity;

R = the average radius of the outer channel wall 216 in the first cell separation stage 312;

$v_{RBC}$  = the sedimentation velocity of RBCs at 1G;

V = the functional volume of the first cell separation stage 312;

W = the average sedimentation distance or width of the channel 208; and

$Q_{IN}$  = the total inlet flow to the channel 208.

Consequently, the packing factor as used herein is dependent upon not only the configuration of the channel

- 98 -

208, particularly the first stage 312, but the rotational velocities being used in the apheresis procedure as well as the inlet flow to the blood processing vessel 352. The following are packing factors associated with the blood processing channel 208 having the above-described dimensions:

	N (rpm)	$Q_{in}$ ml/mi	V (ml)	PF	G $\theta R_{avg}$	P@R1st (psi)
	0	0	62.8	0.0	0.0	0.0
	905	5	62.8	13.0	100.1	8.1
	1279	10	62.8	13.0	200.2	16.2
	1567	15	62.8	13.0	300.2	24.3
	1809	20	62.8	13.0	400.3	32.5
	2023	25	62.8	13.0	500.4	40.6
	2216	30	62.8	13.0	600.5	48.7
FF8	2394	35	62.8	13.0	700.6	56.8
SLOPE=.02	2559	40	62.8	13.0	800.6	64.9
	2714	45	62.8	13.0	900.7	73.0
	2861	50	62.8	13.0	1100.9	81.1
	3001	55	62.8	13.0	1100.9	89.3
	3001	60	62.8	11.9	1100.9	89.3
	3001	65	62.8	11.0	1100.9	89.3
	3001	70	62.8	10.2	1100.9	89.3
	3001	75	62.8	9.5	1100.9	89.3
	3001	80	62.8	8.9	1100.9	89.3
	3001	85	62.8	8.4	1100.9	89.3
	3001	90	62.8	7.9	1100.9	89.3
	3001	95	62.8	7.5	1100.9	89.3
	3001	100	62.8	7.1	1100.9	89.3
	3001	105	62.8	6.8	1100.9	89.3
	3001	110	62.8	6.5	1100.9	89.3
	3001	115	62.8	6.2	1100.9	89.3



	N (rpm)	$Q_{in}$ ml/mi	V (ml)	PF	G $@R_{avg}$	P@R1st (psi)
	3001	120	62.8	6.0	1100.9	89.3
	3001	125	62.8	5.7	1100.9	89.3
	3001	130	62.8	5.5	1100.9	89.3
	3001	135	62.8	5.3	1100.9	89.3
	3001	140	62.8	5.1	1100.9	89.3

Note the G forces are listed for the various rotational speeds at the middle of the first stage 312 and for a 10 inch outer diameter for the channel housing 204. At about 2,560 RPM, the G force is about 800 G, while at about 3,000 RPM the G force is about 1,100 Gs.

Increasing the packing factor beyond a certain point produces diminishing returns regarding the collection of blood component types. That is, further increases in packing factor may not produce correspondingly increased collection efficiencies and may in fact impede the collection of blood component types. It is believed that a packing factor ranging from about 11 to about 15, and more preferably about 13, is optimum for collection of blood component types. As such, the rotational velocity of the channel housing 204 may be adjusted based upon the inlet flows being provided to the blood processing vessel 352 to maintain the packing factor. For instance, the desired operating speed for the centrifuge housing 204 during the normal course of an apheresis procedure is about 3,000 RPM. However, this rotational speed may be reduced to "match" the inlet flow to the blood processing vessel 352 in order to retain the desired packing factor. Similarly, the rotational speed of the channel housing 204

- 100 -

may be increased to "match" an increased inlet flow to the blood processing vessel 352 in order to retain the desired packing factor.

Due to constraints regarding the blood processing vessel 352, more specifically the various tubes interconnected therewith (e.g., which provide the seal-less loop), the above-noted desired packing factor of about 13 may be realized for inlet flows of up to about 55 ml/min. (instantaneous). Beyond 55 ml/min., the rotational speed would have to be increased above 3000 RMP to maintain the desired packing factor of about 13. Although tubes exist which will withstand those rotational speeds, presently they are not approved for use in an apheresis system. With the presently approved tubing, the packing factor may be maintained at a minimum of about 10, and preferably at least about 10.2, for inlet flows (instantaneous) of about 40-70 ml/min.

At the above noted increased rotational speeds, the channel 208 not only provides for achieving an increased packing factor, but reduces the impact of this high packing factor on the collection efficiency regarding platelet collection. Specifically, the configuration of the channel 208 is selected to reduce the number of platelets that are retained within the first stage 312. The configuration of the channel 208 in the first stage 208 utilizes a progressively reduced width or sedimentation distance progressing from the blood inlet slot 224 to the RBC dam 232. That is, the width of the channel 208 proximate the

- 101 -

blood inlet slot 224 is less than the width of the channel 208 proximate the RBC dam 232. This configuration of the channel 208 in the first stage 312 reduces the volume of the "buffy coat" or more specifically layer between the RBCs and platelets to be collected. As noted, this buffy coat includes primarily WBCs and lymphocytes, as well as the radially outwardmost portion of the platelet layer. The "buffy coat" is preferably retained in the first stage 312 during an apheresis procedure. Since the volume of the "buffy coat" is reduced by the reduced width of the channel 208 proximate the RBC dam 232, this reduces the number of platelets which are retained in the first stage 312, and thus increases the number of platelets which flow to the platelet collect well 236.

15                   Disposable Set: Blood Processing Vessel

The blood processing vessel 352 is disposed within the channel 208 for directly interfacing with and receiving a flow of blood in an apheresis procedure. The use of the blood processing vessel 352 alleviates the need for sterilization of the channel housing 204 after each apheresis procedure and the vessel 352 may be discarded to provide a disposable system. There are initially two important characteristics regarding the overall structure of the blood processing vessel 352. The blood processing vessel 352 is constructed such that it is sufficiently rigid to be free standing in the channel 208. Moreover, the blood processing vessel 352 is also sufficiently rigid so as to loaded in the channel 208 having the above-

- 102 -

identified configuration (i.e., such that the blood processing vessel 352 must be directed through the reduced width upper channel section 292 before passage into the larger width mid-channel section 300). However, the blood processing vessel 352 must also be sufficiently flexible so as to substantially conform to the shape of the channel 208 during an apheresis procedure.

In order to achieve the above-noted characteristics, the blood processing vessel 352 may be constructed as follows. Initially, materials for the blood processing vessel 352 include PVC, PETG, and polyolifins, with PVC being preferred. Moreover, the wall of thickness of the blood processing vessel 352 will typically range between about 0.030" and 0.040". Furthermore, the durometer rating of the body of the blood processing vessel 352 will generally range from about 50 Shore A to about 90 Shore A.

Referring primarily to Figs. 16-23B, the blood processing vessel 352 includes a first end 356 and a second end 364 which overlaps with the first end 356 and is radially spaced therefrom. A first connector 360 is disposed proximate the first end 356 and a second connector 368 is disposed proximate the second end 364. When the first connector 360 and second connector 368 are engaged (typically permanently), a continuous flow path is available through the blood processing vessel 352. This construction of the blood processing vessel 352 facilitates loading in the channel 208 in the proper position and as noted also contributes to the automatic control of the

- 103 -

interface between the separated RBCs and the buffy coat relative to the RBC dam 232.

The blood processing vessel 352 includes an inner sidewall 372 and an outer sidewall 376. In the illustrated embodiment, the blood processing vessel 352 is formed by sealing two pieces of material together (e.g., RF welding).

More specifically, the inner sidewall 372 and outer sidewall 376 are connected along the entire length of the blood processing vessel 352 to define an upper seal 380 and a lower seal 384. Seals are also provided on the ends of the vessel 352. The upper seal 380 is disposed in the reduced width upper channel section 292 of the channel 208, while the lower seal 384 is disposed in the reduced width lower channel section 304 of the channel 208 (e.g., Fig.

19F). This again reduces the stresses on the upper seal 380 and lower seal 384 when a flow of blood is provided to the blood processing vessel 352 and pressurizes the same. That is, the upper seal 380 and lower seal 384 are effectively supported by the channel 208 during an apheresis procedure such that a resistance is provided to a "pulling apart" of the upper seal 380 and lower seal 384. By utilizing two separate sheets to form the blood processing vessel 352, a "flatter" profile may also be achieved. This type of profile is beneficial during rinseback, and also facilitates loading and unloading of the vessel 352 relative to the channel 208.

Blood is introduced into the interior of the blood processing vessel 352 through a blood inlet port assembly

- 104 -

388 which is more particularly illustrated in Figs. 19A-G. Initially, the port 392, as all other ports, is welded to the blood processing vessel 352 over a relatively small area. This results in less movement of materials due to the welding procedure which provides a smoother surface for engagement by the blood and/or blood component types.

The blood inlet port assembly 388 includes a blood inlet port 392 and a blood inlet tube 412 which is fluidly interconnected therewith exteriorly of the blood processing vessel 352. The blood inlet port 392 extends through and beyond the inner sidewall 372 of the blood processing vessel 352 into an interior portion of the blood processing vessel 352. Generally, the blood inlet port assembly 388 is structured to allow blood to be introduced into the blood processing vessel 352 during an apheresis procedure without substantially adversely affecting the operation of the apheresis system 2.

The blood inlet port 392 includes a substantially cylindrical sidewall 396. A generally vertically extending slot 404 is disposed proximate an end of the sidewall 396 of the blood inlet port 392 such that the slot 404 is substantially parallel with the inner sidewall 372 and outer sidewall 376 of the blood processing vessel 352. The slot 404 projects in the clockwise direction, and thus directs the flow of blood in the channel 208 generally toward the RBC dam 232. A vane 400 is positioned on the end of the cylindrical sidewall 396, is disposed to be substantially parallel with the inner sidewall 372, and

- 105 -

thereby directs the flow of blood out through the slot 404. As illustrated in Fig. 19D, the vane 400 includes a generally V-shaped notch on the interior of the blood inlet port 392, the arcuate extent of which defines the "height" of the slot 404.

The desired manner of flow of blood into the blood processing vessel 352 during an apheresis procedure is subject to a number of characterizations, each of which is provided by the above-described blood inlet port assembly 388. Initially, the flow of blood into the blood processing vessel may be characterized as being at an angle of less than 90° relative a reference line which is perpendicular to the inner sidewall 372 of the blood processing vessel 352. That is, the blood is injected in a direction which is at least partially in the direction of the desired flow of blood through the blood processing vessel 352. Moreover, the desired flow of blood into the blood processing vessel 352 may be characterized as that which reduces the effect on other flow characteristics within blood processing vessel 352 at the blood inlet port 392.

Separated RBCs 556 again flow along the outer sidewall 376 of the blood processing vessel 352 adjacent the outer channel wall 216, past the blood inlet port 392, and to the RBC outlet port assembly 516 as illustrated in Figs. 19E and 19G. The desired flow of blood into the blood processing vessel 352 may then be further characterized as that which is substantially parallel with at least one

- 106 -

other flow in the region of the blood inlet port 392 (e.g., inject the blood substantially parallel with the flow of RBCs 556). This manner of introducing blood into the blood processing vessel 352 may then be further characterized as that which does not significantly impact at least one other flow in the region of the blood inlet port 392.

As noted above, the blood inlet port assembly 388 interfaces with the inner sidewall 372 of the blood processing vessel 352 in a manner which minimizes the discontinuity along the inner channel wall 212 in the region of the blood inlet slot 224 in which the blood inlet port 392 is disposed. Specifically, a shield 408 may be integrally formed with and disposed about the blood inlet port 392. The shield 408 is disposed on an exterior surface of the blood processing vessel 352 and interfaces with its inner sidewall 372. The shield 408 is at least in partial overlapping relation with the inner sidewall 372). Moreover, in the case where the shield 408 is integrally formed with the port 392, it need not be attached to the inner sidewall 372. The port 392 is installed asymmetrical relative to the shield 408 which is beneficial for manufacturability. All shields and their blood-related ports discussed below also include this feature.

Generally, the shield 408 is more rigid than the inner sidewall 372 of the blood processing vessel 352. This increased rigidity may be provided by utilizing a more rigid material for the shield 408 than is used for the inner sidewall 372. For instance, the durometer rating of



- 107 -

the material forming the shield 408 may range from about 90 Shore A to about 130 Shore A, while the durometer rating of the material forming the inner sidewall 372 of the blood processing vessel 352 again ranges from about 50 Shore A to about 90 Shore A in one embodiment. This durometer rating (when the shield 408 and port 392 are integrally formed) also enhances the seal between the port 392 and the tube installed therein.

When the blood inlet port 392 is disposed in the blood inlet slot 224 when loading the blood processing vessel 352 in the channel 208, the shield 408 is positioned within the recess 228 formed in the inner channel wall 212. Again, the blood inlet slot 224 intersects with the inner channel wall 212, and more specifically the recess 228. That is, the recess 228 contains and is disposed about one end of the blood inlet slot 224. Preferably, the thickness of the shield 408 is substantially equal to the depth or thickness of the recess 228 such that the amount of discontinuity along the inner channel wall 212 in the region of the blood inlet slot 224 is reduced or minimized. Due to the increased rigidity of the shield 408 in comparison to the materials forming the blood processing vessel 352, when the blood processing vessel 352 is pressurized during an apheresis procedure the shield 408 restricts movement of the blood processing vessel 352 and/or the blood inlet port 392 into the blood inlet slot 224. That is, the shield 408 restricts and preferably minimizes any deflection of the blood processing vessel 352 into the blood inlet slot 224

- 108 -

during the procedure. Moreover, with the shield 408 being integrally formed with the blood inlet port 392, the radial position of the vertical slot 404 in the blood inlet port 392 is not dependent upon the thickness of the materials forming the blood processing vessel 352.

In the first stage 312, blood which is provided to the blood processing vessel 352 by the blood inlet port assembly 388 is separated into RBCs, WBCs, platelets, and plasma. The RBCs, as well as the WBCs, are retained within the first stage 312 and are preferably precluded from flowing in a clockwise direction past the RBC dam 232 into the platelet collect well 236. Instead, the RBCs and WBCs are induced to flow along the outer channel wall 216 in a counterclockwise direction past the blood inlet port 392 and toward the RBC outlet port assembly 516 of the blood processing vessel 352. That is, the RBC outlet port assembly 516 is disposed in a counterclockwise direction from the blood inlet port assembly 388. However, as noted above, the control port dam 280 impedes the flow buffy coat control port assembly 488 to provide a sharp interface between the separated RBCs and the plasma proximate the control port assembly 488 such that this may be used to control the radial position of the interface between the RBCs and the buffy coat in the area of the RBC dam 232.

The RBC outlet port assembly 516 is more specifically illustrated in Figs. 20A-D and generally includes an RBC outlet port 520 and an RBC outlet tube 540 fluidly interconnected therewith exteriorly of the blood processing

- 109 -

vessel 352. The RBC outlet port 520 extends through and beyond the inner sidewall 372 of the blood processing vessel 352 into an interior portion of the blood processing vessel 352. In addition to removing separated RBCs from the blood processing vessel 352 during an apheresis procedure, the RBC outlet port assembly 516 also functions in combination with the control port assembly 488 to automatically control the radial position of the interface between separated RBCs and the buffy coat relative to the RBC dam 232 (e.g., to prevent RBCs from flowing beyond the RBC dam 232) in a manner discussed in more detail below.

The RBC outlet port 520 is also configured to reduce the potential for the flow therethrough being obstructed during rinseback (i.e., during an attempted evacuation of the blood processing vessel 352 upon completion of blood component separation so as to provide as much of the contents thereof back to the donor/patient 4). During rinseback, the rotation of the channel housing 204 is terminated and a relatively significant drawing action (e.g., by pumping) is utilized to attempt to remove all contents from the blood processing vessel 352. The end of the RBC outlet port 520 includes a first protrusion 524 and a second protrusion 528 displaced therefrom, with a central recess 532 being disposed therebetween which contains the noted orifice 536 for the blood outlet port 520. The first protrusion 524 and the second protrusion 528 each extend further beyond the inner sidewall 372 of the blood processing vessel 352 a greater distance than the central

- 110 -

recess 532. As such, during rinseback if the outer sidewall 376 attempts to contact the inner sidewall 372, the first protrusion 524 and second protrusion 528 will displace the central recess 532 and its orifice 536 away from the outer sidewall 376. This retains the orifice 536 in an open condition such that the flow therethrough is not obstructed during rinseback.

As noted above, the RBC outlet port assembly 516 interfaces with the inner sidewall 372 of the blood processing vessel 352 in a manner which minimizes the discontinuity along the inner channel wall 212 in the region of the RBC outlet 272 in which the RBC outlet port 520 is disposed. Specifically, a shield 538 is integrally formed with and disposed about the RBC outlet port 520. The shield 538 is disposed on an exterior surface of the blood processing vessel 352 and interfaces with its inner sidewall 372. The shield 538 is at least in partial overlapping relation with the inner sidewall 372. Moreover, in the case where the shield 538 is integrally formed with the port 520, it need not be attached to the inner sidewall 372. Generally, the shield 538 is more rigid than the inner sidewall 372. This increased rigidity may be provided by utilizing a more rigid material for the shield 538 than is used for the inner sidewall 372. For instance, the durometer rating of the material forming the shield 538 may range from about 90 Shore A to about 130 Shore A, while the durometer rating of the material forming the inner sidewall 372 of the blood processing vessel 352 again

- 111 -

ranges from about 50 Shore A to about 90 Shore A in one embodiment.

When the RBC outlet port 520 is disposed in the RBC outlet slot 272 when loading the blood processing vessel 352 in the channel 208, the shield 538 is positioned within the recess 276 formed in the inner channel wall 212. Again, the RBC outlet slot 272 intersects with the inner channel wall 212, and more specifically the recess 276. That is, the recess 276 contains and is disposed about one end of the RBC outlet slot 272. Preferably, the thickness of the shield 538 is substantially equal to the depth or thickness of the recess 276 such that the amount of discontinuity along the inner channel wall 212 in the region of the RBC outlet slot 272 is reduced or minimized. Due to the increased rigidity of the shield 538 in comparison to the materials forming the blood processing vessel 352, when the blood processing vessel 352 is pressurized during an apheresis procedure, the shield 538 restricts movement of the blood processing vessel 352 and/or the RBC outlet port 520 into the RBC outlet slot 272. That is, the shield 538 restricts and preferably minimizes any deflection of the blood processing vessel 352 into the RBC outlet slot 272. Moreover, with the shield 538 being integrally formed with the RBC outlet port 520, the radial position of the orifice 536 is not dependent upon the thickness of the materials forming the blood processing vessel 352.

- 112 -

Separated platelets are allowed to flow beyond the RBC dam 232 and into the second stage 316 of the channel 208 in platelet-rich plasma. The blood processing vessel 352 includes a platelet collect port assembly 416 to  
5 continually remove these platelets from the vessel 352 throughout an apheresis procedure and such is more particularly illustrated in Figs. 8, 16, and 21A-B. Generally, the platelet collect port assembly 416 is disposed in a clockwise direction from the blood inlet port  
10 assembly 388, as well as from the RBC dam 232 when the blood processing vessel 352 is loaded into the channel 208. Moreover, the platelet collect port assembly 416 interfaces with the outer sidewall 376 of the blood processing vessel 352.

15 The platelet collect port assembly 416 is disposed in the platelet support recess 249 and the platelet outlet tube recess 254 which are disposed radially outwardly from the portion of the platelet collect well 236 defined by the outer channel wall 216 of the channel 208. The platelet  
20 collect port assembly 416 generally includes a platelet collect port 420 and a platelet collect tube 424 which is fluidly interconnected therewith exteriorly of the blood processing vessel 352. The orifice 422 of the port 420 may be substantially flush with the interior surface of the  
25 outer sidewall 376 of the blood processing vessel 352. Moreover, the radial position of the orifice 422 is established by engagement of part of the platelet collect port 420 with boundaries of the recess 249 and/or 254.

- 113 -

The platelet collect port 420 is welded to the blood processing vessel 352. The thickness of the overlapping portions of the port 420 and vessel 352 are substantially equal. The weld area is overheated such that there is a  
5 mixing of the two materials. This results in the platelet collect port 420 being able to flex substantially against the outer channel wall 216 when the vessel 352 is pressurized.

The blood processing vessel 352 and the outer channel  
10 wall 216 of the channel 210 collectively define the platelet collect well 236. The contribution of the blood processing vessel 352 to the platelet collect well 236 is provided by a substantially rigid support 428 which is disposed vertically above the platelet collect port 420 and  
15 hingedly interconnected at location 430 with the outer sidewall 376 and/or a mounting plate 426 of the platelet collect port 420. The contoured support 428 includes a first face 432 and a second face 436 which interface with the exterior surface of the outer sidewall 376 of the blood  
20 processing vessel 352 (i.e., the support overlaps with the sidewall 376 of the blood processing vessel 352 and need not be attached thereto over the entire interface therewith) and which are disposed in different angular positions. The upper portion of the first face 432 extends  
25 over the top of the blood processing vessel 352, while the lower portion of the first face 432 generally coincides with the upper seal 380 on the blood processing vessel 352. The second face 436 interfaces with the outer sidewall 376

- 114 -

in a region of the fluid-containing volume of the blood processing vessel 352 and is the primary surface which directs platelets toward the platelet collect port 420.

When the blood processing vessel 352 is pressurized, the support 428 moves into a predetermined position defined by portions of the platelet collect recess 252. Specifically, a third face 440 is retained under an upper lip 254 on the upper perimeter of the platelet support recess 249, and the two sides of a fourth face 444 seat against a shoulder 252 disposed on each side of the platelet support recess 249. A platelet tubing notch 448 is formed in the support 428 at generally the intersection between the third face 440 and the fourth face 444. The platelet collect tube 426 thus may extend out from the platelet collect port 420, up the platelet collect tube recess 254, against the platelet tube notch 448 if necessary, and above the channel housing 204 to pass down through the central opening 328 therein.

In order to increase the purity of platelets that are collected, a platelet purification system as described in U.S. Patent Application Serial Nos. 08/423,578 and 08/423,583 may be disposed in the platelet collect tube 424, and the entire disclosures of these patent applications is incorporated by reference in their entirety herein.

Platelet-poor plasma flows beyond the platelet collect well 236 and to the plasma outlet port assembly 452. Here, some of the platelet-poor plasma may be removed from the



- 115 -

blood processing vessel 352 and collected, although this "separated" plasma may also be returned the donor/patient 4 in some instances. The plasma port 456 is also used in the blood priming of the vessel 352 in that air is removed from the vessel 352 through the plasma port 456. Referring to Fig. 22, the plasma outlet port assembly 452 includes a plasma outlet port 456 and a plasma outlet tube 476 which is fluidly interconnected therewith exteriorly of the blood processing vessel 352. The plasma outlet port 456 extends through and beyond the inner sidewall 372 of the blood processing vessel 352 into an interior of the blood processing vessel 352. The plasma outlet port 456 is disposed between the second end 364 of the blood processing vessel 352 and the second connector 368.

The plasma outlet port 456 is configured to reduce the potential for the flow therethrough being obstructed during rinseback (i.e., during an attempted evacuation of the blood processing vessel 352 upon completion of an apheresis procedure so as to provide as much of the contents thereof back to the donor/patient 4). During rinseback, the rotation of the channel housing 204 is terminated and a relatively significant drawing action (e.g., by pumping) is utilized to attempt to remove all contents from the blood processing vessel 352. The end of the plasma outlet port 456 includes a first protrusion 460 and a second protrusion 464 displaced therefrom, with a central recess 468 being disposed therebetween which contains an orifice 472 for the plasma outlet port 456. The first protrusion 460 and the

- 116 -

second protrusion 464 each extend further beyond the inner sidewall 372 of the blood processing vessel 352 a greater distance than the central recess 468. As such, during rinseback if the outer sidewall 376 attempts to contact the inner sidewall 372, the first protrusion 460 and second protrusion 464 will displace the central recess 468 and its orifice 472 away from the outer sidewall 376. This retains the orifice 472 in an open condition such that the flow therethrough is not obstructed during rinseback.

In order to further assist in withdrawal from the blood processing vessel 352 after completion of an apheresis procedure and thus during rinseback, a first passageway 480 and a second passageway 484 are formed in the blood processing vessel 352 (e.g., via heat seals, RF seals) and generally extend downwardly from the plasma outlet port 456 toward a lower portion of the blood processing vessel 352. The first passageway 480 and second passageway 484 are disposed on opposite sides of the plasma outlet port 456. With this configuration, a drawing action through the plasma outlet port 456 is initiated in a lower portion of the blood processing vessel 352 at two displaced locations.

Some of the separated plasma is also utilized to automatically control the location of the interface between separated RBCs and the buffy coat in the first stage 312, specifically the radial position of this interface relative to the RBC dam 232. Plasma which provides this interface control function is removed from the blood processing

- 117 -

vessel 352 by a control port assembly 488 which is illustrated in Figs. 23A-B. The control port assembly 488 is disposed in a clockwise direction from the plasma outlet port assembly 452 and proximate the RBC outlet port assembly 516, and thus between the first end 284 of the channel 208 and the RBC outlet port assembly 516. This plasma thus flows from the second stage 316 and into the third stage 320 to provide this function.

The control port assembly 488 generally includes a control port 492 and control port tube 512 which is fluidly interconnected therewith exteriorly of the blood processing vessel 352. The control port 492 extends through and beyond the inner sidewall 372 of the blood processing vessel 352 into an interior portion of the blood processing vessel 352. The radial positioning of the orifice 504 of the control port 492 is not dependent upon the thickness of the material forming the blood processing vessel 352. Instead, the control port 492 includes a shoulder 496 which engages or seats upon structure within the control port slot 264 to accurately place the orifice 504 at a predetermined radial position within the channel 208. Moreover, this predetermined radial position is substantially maintained even after the blood processing vessel is pressurized. In this regard, the control port assembly 488 interfaces with the inner sidewall 372 of the blood processing vessel 352 in a manner which minimizes the discontinuity along the inner channel wall 212 in the region of the control port slot 264 in which the control

- 118 -

port 492 is disposed. Specifically, a shield 508 is integrally formed with and disposed about the control port 492. The shield 508 is disposed on an exterior surface of the blood processing vessel 352 and interfaces with its inner sidewall 372. The shield 508 is at least in partial over-lapping relation with the inner sidewall 372. Moreover, in the case where the shield 508 is integrally formed with the port 492, it need not be attached to the inner sidewall 372. Generally, the shield 508 is more rigid than the inner sidewall 372 and this assists in maintaining the orifice 504 of the control port 492 at the desired radial position within the channel 208. This increased rigidity may be provided by utilizing a more rigid material for the shield 508 than is used for the inner sidewall 372. For instance, the durometer rating of the material forming the shield 508 may range from about 90 Shore A to about 130 Shore A, while the durometer rating of the material forming the inner sidewall 372 of the blood processing vessel 352 again ranges from about 50 Shore A to about 90 Shore A in one embodiment.

The control port assembly 488 and the RBC outlet port assembly 516 function in combination to control the radial position of the interface between separated RBCs and the buffy coat relative to the RBC dam 232. Two structural differences between the RBC outlet port assembly 516 and the control port assembly 488 contribute to achieving this automatic control. Initially, the orifice 536 to the RBC outlet port 520 is disposed further into the interior of

- 119 -

the blood processing vessel 352 than the control port 492. In one embodiment, the orifice 538 of the RBC outlet port 520 is disposed more radially outwardly than the orifice 504 of the control port 492. Moreover, the diameter of the RBC outlet tube 540 is greater than that of the control port tube 512. In one embodiment, the inner diameter of the RBC outlet tube 54 is about 0.094", while the inner diameter of the control port tube 512 is about 0.035". The control port tube 512 and RBC outlet tube 540 also join into a common return tube 546 via a three-way tubing jack 544 which further assists in providing the automatic interface control feature.

The automatic interface position control is provided as follows utilizing the RBC outlet port assembly 516 and the control port assembly 488. Initially, there are two interfaces in the channel 208 of significance with regard to this automatic interface position control feature. One of these interfaces is the RBC/buffy coat interface in relation to the RBC dam 232. However, there is also an RBC/plasma interface in the region of the control port assembly 488 which again is available through use of the control port dam 280. The control port dam 280 allows substantially only RBCs to flow to the control port assembly 488 in a counterclockwise direction.

In the event that the interface between the RBCs and plasma moves radially inwardly toward the rotational axis 324, RBCs will begin flowing out the control port tube 512 in addition to the RBC outlet tube 540. This decreases the

- 120 -

flow through the smaller diameter control port tube 512 due to the higher viscosity and density of the RBCs compared to the plasma which typically flows through the control port tube 512. Consequently, the flow through the larger diameter RBC outlet tube 540 must increase since the flow through the return tube 546 must remain the same. This removes more RBCs from the first stage 312 such that both the interface between the RBCs and the buffy coat in relation to the RBC dam 232 and the interface between the RBCs and the plasma both move radially outwardly. That is, this changes the radial position of each of these interfaces. As such, the potential for RBCs flowing beyond the RBC dam 232 and into the platelet collect well 236 is reduced.

In the event that the location of the interface between the RBCs and plasma progresses radially outward, the flow through the control port tube 512 will increase since the quantity of RBCs exiting the blood processing vessel 352 through the control port 512 will have decreased. Since the flow through the return tube 546 must remain the same, this results in a decrease in the flow of RBCs through the RBC outlet tube 540. This reduces the number of RBCs being removed from the channel 208 such that both the interface between the RBCs and the buffy coat in relation to the RBC dam 232 and the interface between the RBCs and the plasma both move radially inwardly. That is, this changes the radial position of each of these interfaces.

- 121 -

The above-described tubes which interface with the blood processing vessel 352, namely the blood inlet tube 412, the platelet collect tube 424, the plasma outlet tube 476, the return tube 546, each pass downwardly through the central opening 328 in the channel housing 204. A tubing jacket 548 is disposed about these various tubes and protects such tubes during rotation of the channel housing 204. These tubes are also fluidly interconnected with the extracorporeal tubing circuit 10 which again provides for fluid communication between the donor/patient 4 and the blood processing vessel 352.

The blood processing vessel 352 also includes features for loading and unloading the same from the channel 208. Referring back to Fig. 16, the vessel 352 includes at least one and preferably a plurality of tabs 552. The tabs 552 may be integrally formed with the blood processing vessel 352 (e.g., formed by the seal which also forms the upper seal 380). However, the tabs 552 may also be separately attached. The tabs 552 nonetheless extend vertically above the fluid-containing volume of the blood processing vessel 352, preferably a distance such that the tabs 552 actually project above the channel housing 204. The tabs 552 thereby provide a convenient non-fluid-containing structure for the operator to grasp and load/remove the blood processing vessel 352 into/from the channel 208 (i.e., they provide structure for the operator to grasp which has had no blood-related flow therethrough during the apheresis procedure). The tabs 552 are particularly useful since

- 122 -

there may be resistance provided to a loading and an unloading of the blood processing vessel 352 into/from the channel 208.

#### Centrifuge Rotor Assembly

5           The channel assembly 200 is mounted on the centrifuge rotor assembly 568 which rotates the channel assembly 200 to separate the blood into the various blood component types by centrifugation. The centrifuge rotor assembly 568 is principally illustrated in Figs. 24-25 and generally  
10 includes a lower rotor housing 584 having a lower gear 588. An input or drive shaft 576 is disposed within the lower rotor housing 584 and is rotatably driven by an appropriate motor 572. The input/drive shaft 576 includes a platform 580 mounted on an upper portion thereof and a rotor body  
15 592 is detachably interconnected with the platform 580 such that it will rotate therewith as the input/drive shaft 576 is rotated by the motor 572.

          The centrifuge rotor assembly 568 further includes an upper rotor housing 632 which includes a mounting ring 644  
20 on which the channel housing 204 is positioned. In order to allow the channel housing 204 to rotate at twice the speed of the rotor body 592, the upper rotor housing 632 and lower rotor housing 584 are rotatably interconnected by a pinion assembly 612. The pinion assembly 612 is mounted  
25 on the rotor body 592 and includes a pinion mounting assembly 616 and a rotatable pinion 620. The pinion 620 interfaces with the lower gear 588 and a driven gear 636 which is mounted on the mounting ring 644. The gear ratio



- 123 -

is such that for every one revolution of the rotor body 592, the upper rotor housing 632 rotates twice. This ratio is desired such that no rotary seals are required for the tubes interfacing with the blood processing vessel 352. In one embodiment, the lower gear 588, the pinion 620, and the driven gear 636 utilize straight bevel gearing.

The centrifuge rotor assembly 568 is also configured for easy loading of the blood processing vessel 352 in the channel 208 of the channel housing 204. In this regard, the rotor body 592 includes a generally L-shaped blood processing vessel loading aperture 597. The aperture 597 includes a lower aperture 600 which extends generally horizontally into the rotor body 592 through its sidewall 596 of the rotor body 592, but only partially therethrough. The perimeter of the lower aperture 600 is defined by a left concave wall 601, a back concave wall 603, and a right concave wall 602.

The loading aperture 597 also includes an upper aperture 598 which intersects with the lower aperture 600 at 599 and extends upwardly through an upper portion of the rotor body 592. The upper aperture 598 is aligned with a generally vertically extending central opening 640 in the upper rotor housing 632. As noted above, the channel housing 204 also includes a central opening 328. As such, a blood processing vessel 352 may be folded if desired, inserted into the lower aperture 600, deflected upwardly by the back concave wall 603, through the upper aperture 598, through the central opening 640 in the upper rotor housing

- 124 -

632, and through the central opening 328 of the channel housing 204. The operator may then grasp the blood processing vessel 352 and load the same in the channel 208.

5 The centrifuge rotor assembly 568 includes a number of additional features to facilitate the loading of the blood processing vessel 352 in the channel 208. Initially, the pinion 620 is radially offset in relation to the lower aperture 600 of the rotor body 592. In one embodiment, a reference axis laterally bisects the lower aperture 600 and  
10 may be referred to as the "zero axis". The axis about which the pinion 620 rotates is displaced from this "zero axis" by an angle  $\alpha$  of about  $40^\circ$  in the illustrated embodiment. An angle  $\alpha$  of  $-40^\circ$  could also be used. Positioning the pinion 620 at an angle of "greater" than  
15  $\pm 40^\circ$  will result in the pinion 620 beginning to interfere with the access to the loading aperture 597. Although the angle  $\alpha$  may be less than  $40^\circ$  and may even be  $0^\circ$ , having the pinion 620 at  $0^\circ$  will result in the counterweights 608 potentially interfering with the access to the loading  
20 aperture 597. Based upon the foregoing, in Fig. 25 the pinion assembly 612 has therefore been rotated about the axis which the centrifuge rotor assembly 568 rotates for ease of illustration.

25 Since only a single drive gear is utilized to rotate the upper rotor housing 632 relative to the rotor body 592, an upper counterweight 604 and lower counterweight 608 are disposed or detachably connected to the rotor body 592 proximate the upper and lower extremes of the lower

- 125 -

aperture 600. Due to the offset positioning of the pinion 620 in relation to the lower aperture 600, the upper and lower counterweights 604, 608 are also radially offset in relation to the lower aperture 600. That is, the upper and lower counterweights 604, 608 are "off to the side" in relation to the lower aperture 600 such that access thereto is not substantially affected by the counterweights 604 and 608. A tube mounting arm 624 is also appropriately attached to the rotor body 592 and engages the tubing jacket 548. The tubing mounting arm 624 serves to further the rotational balance of the rotor body 592.

Another feature of the centrifuge rotor assembly 568 which contributes to the loading of the blood processing vessel 352 upwardly through the rotor body 592 is the size of the lower aperture 600. As illustrated in Fig. 25B, the "width" of the lower aperture may be defined by an angle  $\theta$  which may range from about 70° to about 90°, and in the illustrated embodiment is about 74°. The back wall 603, left wall 601, and right wall 602 are also defined by a radius ranging from about 1.75" to about 2.250", and in the illustrated embodiment this radius is between about 2.008" and about 2.032".

#### Apheresis Protocol

One protocol which may be followed for performing an apheresis procedure on a donor/patient 4 utilizing the above-described system 2 will now be summarized. Initially, an operator loads the cassette assembly 110 onto the pump/valve/sensor assembly 1000 of the blood component

- 126 -

separation device 6 and hangs the various bags (e.g., bags 114, 94, 84) on the blood component separation device 6. The operator then loads the blood processing vessel 352 within the channel 208 which is disposed on the channel housing 204 which is in turn mounted on the centrifuge rotor assembly 568, particularly the mounting ring 644. More specifically, the operator may fold the blood processing vessel 352 and insert the same into the blood processing vessel loading aperture 597 on the rotor body 592. Due to the arcuately-shaped, concave configuration of the loading aperture 597, specifically the lower aperture 600, the blood processing vessel 352 is deflected upwardly through the upper aperture 598, the central opening 640 in the upper rotor housing, and the central opening 328 in the channel housing 294. The operator then grasps the blood processing vessel 352 and pulls it upwardly away from the channel housing 204.

Once the blood processing vessel 352 has been installed up through the centrifuge rotor assembly 568, the operator loads the blood processing vessel 352 into the channel 208 on the channel housing 204. The operator generally aligns the blood processing vessel 352 relative to the channel 208 (e.g., such that the blood inlet port 392 is vertically aligned with the blood inlet slot 224, such that the platelet collect port 420 is vertically aligned with the platelet support recess 249 and the platelet collect tube recess 254, such that the plasma outlet port 456 is vertically aligned with the plasma

- 127 -

outlet slot 256, such that the control port 492 is vertically aligned with the control port slot 264, and such that the RBC outlet port 520 is vertically aligned with the RBC outlet slot 272). Once again, the interconnection of the first connector 360 and second connector 368, which is preferably fixed, facilitates the loading of the blood processing vessel 352, as well as the existence of the chamfer 210.

With the blood processing vessel 352 properly aligned, the operator directs the blood processing vessel 352 through the reduced width upper channel section 292 of the channel 208 until the blood processing vessel 352 hits the channel base 220. In this case, the longitudinal extent of the blood processing vessel 352 located in the portion of the channel 208 which includes the first stage 312, the RBC dam 232, and the platelet collect stage 316 will be disposed as follows: 1) the upper seal 380 will be disposed in the upper channel section 292; 2) the fluid-containing volume of the blood processing vessel 352 will be disposed in the mid channel section 300; and 3) the lower seal 384 will be disposed in the lower channel section 304. The above-noted ports will also be disposed in their respective slots in the channel housing 204 by the operator at this time. Moreover, the shield 408 associated with the blood inlet port assembly 388 will be disposed in the recess 228 associated with the blood inlet slot 224. Similarly, the shield 538 associated with the RBC outlet port assembly 516 will be disposed in the recess 276

- 128 -

associated with the RBC outlet slot 272. Furthermore, the shield 508 associated with the control port assembly 488 will be disposed in the recess 268 associated with the control port slot 264.

5           With the extracorporeal tubing circuit 10 and the blood processing vessel 352 loaded in the above-described manner, the circuit 10 and vessel 352 are pressure tested to verify that there are no leaks. The donor/patient 4 is then fluidly interconnected with the extracorporeal tubing  
10   circuit 10 (by inserting an access needle 32 into the donor/patient 4). Moreover, the anticoagulant tubing 54 is primed between the anticoagulant supply (which interfaces with the spike drip member 52) and the manifold 48. Furthermore, blood return tubing 28 is primed with blood  
15   from the donor/patient 4 by running the blood return peristaltic pump 1090 pump in reverse to draw blood from the donor/patient 4, through the blood return tubing 28, and into the reservoir 150 until blood is detected by the low level sensor 1320.

20           The blood processing vessel 352 must also be primed for the apheresis procedure. In one embodiment, a blood prime may be utilized in that blood will be the first liquid introduced into the blood processing vessel 352. The flow of blood from the donor/patient 4 to the  
25   extracorporeal tubing circuit 10 is initiated with the centrifuge rotor assembly 568 rotating the channel housing 204 at a rotational velocity of from about 150 RPM to about 250 RPM for a rotor diameter of about 10", and typically

- 129 -

about 200 RPM. This lower rotational velocity not only reduces the potential for air locks developing the in the blood processing vessel 352, but also minimizes any preheating of the blood processing vessel 352. The rotational velocity in this "first stage" need not be fixed, but may vary.

Once the flow of blood reaches the blood processing vessel 352, the rotational speed of the channel housing 204 is increased from about 1,500 RPM to about 2,500 RPM for a rotor diameter of about 10", preferably about 2000 RPM, such that blood being provided to the blood processing vessel 352 will be separated into the various blood component types even during the priming procedure. Once again, in this "second stage", the rotational velocity during need not be fixed, but may vary. In order for a blood prime to be successful, a flow must be provided to the control port assembly 488 before any RBCs flows beyond the RBC dam 232 in a clockwise direction. This is again provided by the configuration of the channel 208.

Importantly, during this "second stage" of the blood priming procedure, air present in the blood processing vessel 352 is removed from the blood processing vessel 352 and due to the noted rotational velocities in this "second stage", the potential for air locks is also reduced. More specifically, air which is present in the blood processing vessel 352 is less dense than the whole blood and all of its blood component types. As noted above, the radially inwardmost portion of the inner channel wall 212 is at the

- 130 -

intersection between the plasma outlet slot 256 and the inner channel wall 212. Consequently, the air present in the blood processing vessel 352 collects near the plasma outlet port 456 and is removed from the blood processing vessel 352 through the plasma outlet tubing 476, and is provided to the vent bag 114.

When the blood processing vessel 352 contains blood and/or blood components throughout its entirety, the rotational velocity of the channel housing 204 is increased to its normal operation speed from about 2,750 RPM to about 3,250 RPM for a rotor diameter of about 10", and preferably about 3,000 RPM. This completes the blood priming procedure.

During the above-noted blood priming procedure, as well as throughout the remainder of the apheresis procedure, blood component types are separated from each other and removed from the blood processing vessel 352 on a blood component type basis. At all times during the apheresis procedure, the flow of whole blood is provided to the blood processing vessel 352 through the blood inlet port assembly 416 and is directed to the first stage 312. The control port dam 280 again reduces the potential for blood flowing in a counterclockwise direction in the channel 208.

In the first stage 312, blood is separated into a plurality of layers of blood component types including, from the radially outermost layer to the radially innermost layer, RBCs, WBCs, platelets, and plasma. As such, the



- 131 -

RBCs sediment against the outer channel wall 216 in the first cell separation stage 312. By configuring the RBC dam 232 such that it is a section of the channel 210 which extends further inwardly toward the rotational axis 324 of the of the channel housing 204, this allows the RBC dam 232 to retain separated red blood cells in the first stage 312.

Separated RBCs are removed from the first stage 312 utilizing the above-noted configuration of the outer channel wall 216 which induces the RBCs to flow in a counterclockwise direction (e.g., generally opposite to the flow of blood through the first cell separation stage 312). That is, the portion of the channel 208 proximate the RBC outlet port assembly 516 is disposed further from the rotational axis 324 of the channel housing 204 than that portion of the channel 210 proximate the RBC dam 232. As such, separated RBCs flow through the first stage 312 in a counterclockwise direction along the outer channel wall 216, past blood inlet port assembly 388 on the blood processing vessel 352, and to an RBC outlet port assembly 516. Since the vertical slot 404 of the blood inlet port 392 is substantially parallel with the inner channel wall 212, the outer channel wall 216, the inner sidewall 372 of the blood processing vessel 352 and the outer sidewall 376 of the blood processing vessel 352, since it directs the flow of blood in a clockwise direction in the channel 208 and thus toward the RBC dam 232, since it is disposed proximate the inner channel wall 212, the introduction of blood into the blood processing vessel 352 does not

- 132 -

substantially affect the flow of RBCs along the outer channel wall 216. Consequently, RBCs effectively flow undisturbed past the blood inlet port 392 and to the RBC outlet port assembly 516 for removal from the blood processing vessel 352. These RBCs may either be collected and/or provided back to the donor/patient 4.

Platelets are less dense than RBCs and are thus able to flow beyond the RBC dam 232 and to the platelet collect well 236 in platelet-rich plasma where they are removed from the blood processing vessel 352 by the platelet collect port assembly 416. Again, the blood processing vessel 352 via the support 428 and the outer channel wall 216 collectively define the platelet collect well 236 when the blood processing vessel 352 is pressurized. That is, part of the platelet collect well 236 is defined by the lower face 240 and side faces 244, 248 formed in the outer channel wall 216, while the remainder thereof is defined by the second face 436 of the support 428 when the support 428 is moved into a predetermined position within and against portions of platelet support recess 249 upon pressurization of the blood processing vessel 352.

Platelet-poor plasma is less dense than the platelets and continues to flow in a clockwise direction through the second stage 316 to the plasma outlet port assembly 452 where at least some of the plasma is removed from the blood processing vessel 352. This plasma may be collected and/or returned to the donor/patient 4. However, some of the plasma flow continues in the clockwise direction into and

- 133 -

through the third stage 320 to the control port assembly 488 to provide for automatic control of the location of the interface between the RBCs and platelets in the above-described manner.

5                                   Graphical Computer Interface

In order to assist an operator in performing the various steps of the protocol being used in an apheresis procedure with the apheresis system 2, the apheresis system 2 further includes a computer graphical interface 660  
10 illustrated in Fig. 1. The following description describes an interface for use by an English language speaking operator. For other operations and/or languages, the textual portions of the interface would, of course, be adapted accordingly. The graphical interface 660 includes  
15 a computer display 664 which has "touch screen" capabilities. Other appropriate input devices (e.g., keyboard) may also be utilized alone or in combination the touch screen. For example, a pump pause and a centrifuge stop button of the well known membrane type may be  
20 provided. The graphics interface 660 not only allows the operator to provide the necessary input to the apheresis system 2 such that the parameters associated with operation of the apheresis system may be determined (e.g., data entry to allow determination of various control parameters  
25 associated with the operation of the apheresis system 2), but the interface 660 also assists the operator by providing pictorials of at least certain steps of the apheresis procedure. Moreover, the interface 660 also

- 134 -

effectively conveys the status of the apheresis procedure to the operator. Furthermore, the interface 660 also may be used to activate standardized corrective actions (i.e., such that the operator need only identify the problem and indicate the same to the interface 660 which will then direct the apheresis system 2 to correct the same).

Referring to Fig. 26, at the start of an apheresis procedure a master screen 696 is displayed to the operator on the display 664. The master screen 696, as well as each of the screens displayed to the operator by the interface 600, includes a status bar 676. The status bar 676 includes a system prep icon set 700. The system prep icon set 700 includes a load icon 704 (representing the shape of blood component separation device 6) with a downwardly extending arrow which collectively pictorially conveys to the operator that the disposable set 8 must be loaded onto the blood component separation device 6. The word "LOAD" is also positioned below the load icon 704 to provide a short textual instruction to the operator of the required action(s).

The system prep icon set 700 also includes an information icon 708 (representing the shape of an open filing folder) which pictorially conveys to the operator that certain information relating to the donor/patient 4, the procedure protocol, and/or the blood component separation device 6 must be obtained and entered. This information may be utilized by the apheresis system 2 to calculate one or more of the parameters associated with the

- 135 -

apheresis procedure (e.g., inlet flow rate to the blood processing vessel 352) and/or to generate predicted yields of one or more blood component types (e.g., the amount of a certain blood component type which is anticipated to be collected based upon certain parameters such as donation time). The word "INFO" is also positioned below the information icon 708 to provide a short textual instruction to the operator of the required action(s). The information icon 708 is also positioned to the right of the load icon 704 to indicate to the operator that it is preferred, although not required, to perform the step(s) associated with the information icon 708 after the step(s) associated with the load icon 704 have been completed.

The status bar 676 also includes a collection icon set 712. The collection icon set 712 includes a donor/patient prep icon 716 (representing the shape of the donor/patient 4) which pictorially conveys to the operator that the donor/patient 4 must now be fluidly interconnected with the blood component separation device 6. The word "PREPARE" is also positioned below the donor/patient prep icon 716 to provide a short textual instruction to the operator of the required action(s). The donor/patient prep icon 716 is also positioned to the right of the information icon 708 to indicate to the operator that the step(s) associated with the donor/patient prep icon 716 may only be performed after the step(s) associated with the load icon 704 and the information icon 708 have been completed.

- 136 -

The collection icon set 712 also includes a donate icon 720 with a laterally extending arrow which collectively pictorially conveys to the operator that the actual collection procedure may be initiated and that the step(s) to initiate this action should now be performed. The word "DONATE" is also positioned below the donate icon 720 to provide a short textual instruction to the operator of the required action(s). The donate prep icon 720 is also positioned to the right of the donor/patient prep icon 716 to indicate to the operator that the step(s) associated with the donate icon 720 must be performed after the step(s) associated with the donor/patient prep icon 716 have been completed.

The status bar 676 also includes an unload icon 724 (representing the shape of the blood component separation device 6) and a generally upwardly extending arrow which collectively pictorially convey to the operator that the disposable set must now be removed from the blood component separation device 6. The word "UNLOAD" is also positioned below the unload icon 724 to provide a short textual instruction to the operator of the required action(s). The unload icon 724 is also positioned to the right of the donate icon 720 to indicate to the operator that the step(s) associated with the unload icon 724 must be performed after the step(s) associated with the donate icon 720 have been completed.

The system preparation icon set 700, collection icon set 712, and unload icon 724 in the status bar 676

- 137 -

sequentially set forth certain basic steps for the apheresis procedure. That is, the left to right positioning of the various icons conveys to the operator the desired/required order in which the step(s) associated with the icons should/must be performed. Moreover, the individual icons 704, 708, 716, 720, and 724 are also utilized to convey the status of the apheresis procedure to the operator via three-way color differentiation (i.e., one status per color) and/or by three-way shade differentiation. "Shades" includes variations of a given color and also encompasses using variations based upon being "lighter" and/or "darker" (e.g., using light gray, medium gray, and dark gray). That is, a "gray-scale" technique may also be utilized and is encompassed by use of color and/or shade differentiation.

The first status conveyed to the operator by the icons in the status bar 676 is that the step(s) associated with respective icon are not ready to be performed. That is, the performance of this step(s) would be premature. This first status is conveyed to the operator by displaying the associated icon in a first color, such as white. The corresponding textual description may also be presented in this first color as well. As noted, a first "shade" may also be utilized to convey this first status as well.

The second status conveyed to the operator by the icons in the status bar 676 is that the step(s) associated with the respective icon is either ready for execution or is in fact currently being executed. That is, an

- 138 -

indication is provided to the operator that performance of this step(s) of the apheresis procedure is now timely. This second status is conveyed to the operator by displaying the associated icon in a second color, such as yellow. The corresponding textual description may also be presented in this second color as well. As noted, second "shade" may also be utilized to convey this second status as well.

The third status conveyed to the operator by the icons in the status bar 676 is that the step(s) associated with the respective icon has been executed. That is, an indication is provided to the operator that performance of this step(s) of the apheresis procedure has been completed. This third status is conveyed to the operator by displaying the associated icon in a third color, such as gray. The corresponding textual description may also be presented in this third color as well. As noted, third "shade" may also be utilized to convey this third status as well.

Based upon the foregoing, it will be appreciated that significant information is conveyed to the operator by merely viewing the status bar 676. For instance, the operator is provided with a pictorial graphic indicative of the fundamental steps of an apheresis procedure. Moreover, the operator is provided with a textual graphic indicative of the fundamental steps of an apheresis procedure. Furthermore, the operator is provided with a desired/required order in which these steps should/must be performed. Finally, the operator is provided with the



- 139 -

status of the apheresis procedure via the noted three-way color/shade differentiation.

The master screen 696, as well all other screens displayed to the operator by the interface 660 during an apheresis procedure, also include a work area 688. The work area 688 provides multiple functions. Initially, the work area 688 displays additional information (pictorially and textually in some instances) on performing the apheresis procedure to the operator (e.g., certain additional substeps of the apheresis procedure, addressing certain "conditions" encountered during the apheresis procedure). Moreover, the work area 688 also displays additional information on the status of the apheresis procedure to the operator. Furthermore, the work area 688 also provides for operator interaction with the computer interface 660, such as by allowing/requiring the operator to input certain information.

Continuing to refer to Fig. 26, the work area 688 of the master screen 696 displays a load system button 728 and a donor/patient info button 780. The operator may touch either of these buttons 728, 780 (i.e., since the display 696 has "touch screen" capabilities) to generate further screens for providing information to the operator and/or to facilitate the inputting of information to the computer interface 660. The operator may initially touch either the load system button 728 or the donor/patient info button 780 at the start of an apheresis procedure. That is, the order in which the step(s) associated with the load system button

- 140 -

728 are performed in relation to the apheresis step(s) associated with the donor/patient info button 780 are performed is not important (i.e., the steps associated with the load system button 728 may be performed before or after the steps associated with the donor/patient info button 780). The apheresis procedure will be described with regard to the operator electing to initially activate the load system button 728 via the touch screen feature.

Activation of the load system button 728 generates a loading procedure screen 732 on the computer display 664 which is illustrated in Fig. 27. The loading procedure screen 732 displays multiple pictorials to the operator in the work area 688 which relate to the steps which need to be performed to prepare the blood component separation device 6 for an apheresis procedure. Initially, a hang pictorial 736 is displayed which pictorially conveys to the operator that the various bags (e.g., an AC bag(s) (not shown), plasma collect bag(s) 94 platelet collect bag(s) 84) need to be hung on the blood component separation device 6 and generally how this step may be affected by the operator. The word "HANG" is also positioned above the hang pictorial 736 to provide a short textual instruction to the operator of the required action(s). Consequently, there are two different types of graphical representations provided to the operator relating to a specific operator action which is required to prepare the blood component separation device 6 for the apheresis procedure. Moreover, the hang pictorial 736 is disposed on the left side of the

- 141 -

loading procedure screen 732 which indicates that this is the first step or substep associated with the load icon 704. In order to provide further indications of the desired order to the operator, the number "1" is also disposed adjacent to the word "HANG."

A focus color (e.g., yellow) or shade may be used to direct the operator's attention to specific areas of the machine or screen. The loading procedure screen 732 also displays an insert pictorial 740 to the operator in the work area 688. The insert pictorial 740 pictorially conveys to the operator that the cassette assembly 110 needs to be mounted on the pump/valve/sensor assembly 1000 of the blood component separation device 6 and generally how this step may be affected by the operator. The word "INSERT" is also positioned above the insert pictorial 740 to provide a short textual instruction to the operator of the required action(s). The insert pictorial 740 is also positioned to the right of the hang pictorial 736 to indicate to the operator that it is preferred, although not required, to perform the step(s) associated with the insert pictorial 740 after the step(s) associated with the hang pictorial 736 have been completed. In order to provide further indications of the desired order to the operator, the number "2" is also disposed adjacent to the word "INSERT."

The loading procedure screen 732 also displays a load pictorial 744 to the operator in the work area 688. The load pictorial 744 pictorially conveys to the operator that

- 142 -

the blood processing vessel 352 needs to be loaded into the channel 208 of the channel housing 204 on the centrifuge rotor assembly 568 and generally how this step may be affected by the operator. The word "LOAD" is also positioned above the load pictorial 744 to provide a short textual instruction to the operator of the required action(s). The load pictorial 744 is also positioned to the right of the insert pictorial 740 to indicate to the operator that it is preferred, although not required, to perform the step(s) associated with the load pictorial 744 after the step(s) associated with the insert pictorial 740 have been completed. In order to provide further indications of the desired order to the operator, the number "3" is also disposed adjacent to the word "LOAD."

Finally, the loading procedure screen 732 displays a close pictorial 748. The close pictorial 748 pictorially conveys to the operator that the door of the blood component collection device housing the centrifuge rotor assembly 568 needs to be closed and generally how this step may be affected by the operator. The word "CLOSE" is also positioned above the close pictorial 748 to provide a short textual instruction to the operator of the required action(s). The close pictorial 748 is also positioned to the right of the load pictorial 744 to indicate to the operator that it is required to perform the step(s) associated with the close pictorial 748 after the step(s) associated with the load pictorial 744 have been completed. In order to provide further indications of the desired

- 143 -

order to the operator, the number "4" is also disposed adjacent to the word "CLOSE."

In summary, the work area 688 of the loading procedure screen 732 not only conveys to the operator what type of steps must be performed for this aspect of the apheresis procedure and generally how to perform these steps, the work area 688 of the loading procedure screen 732 also specifies the order in which these steps should be performed by two "methods." Initially, the pictorial graphics 736, 740, 744 and 748 are sequentially displayed in left-to-right fashion to specify the desired/required order of performance. Moreover, the four steps are also numerically identified next to their associated one-word textual description.

In the event that the operator requires additional guidance with regard to any of the steps presented on the loading procedure screen 732, the operator may touch the help button 692 provided on the loading procedure screen 732. This may display a menu of screens which the operator may view and/or may sequentially present a number of help screens associated with the loading procedure screen 732. Fig. 28 illustrates a help screen 764 which relates to the loading of the blood processing vessel 352 into the channel 208 on the channel housing 204. Note that in the case of the help screen 764 the upper portion of the work area 688 of the loading procedure screen 732 is retained (i.e., the one word textual descriptions of the four basic steps and the associated numerical ordering identifier). Moreover,

- 144 -

the help screen 764 provides the operator with more detail, in the nature of additional pictorials, regarding one or more aspects of the particular step(s) or substep or in this case on the loading of the blood processing vessel 352 in the channel 208. Once the operator exits the help screen 764 via touching the continue button 752 on the help screen 764, the operator is returned to the loading procedure screen 732 of Fig. 22. Various other screens in the graphics interface 660 may include a help button 692 to provide this type of feature.

When the operator has completed each of the four steps or substeps presented on the loading procedure screen 732, the operator touches the continue button 752 on the bottom of the loading procedure screen 732. In the event that during the time in which the operator is performing the steps or substeps associated with the loading procedure screen 732 the operator wants to return to the begin operations screen 696, the operator may touch the display screen 664 in the area of the return button 756. The return button 756 may be provided on various of the screens to return the operator to the previous screen when acceptable. Moreover, in the event that during the time in which the operator is performing the steps or substeps associated with the loading procedure screen 732 the operator wants to terminate the loading procedure, the operator may touch the display screen 664 in the area of the exit load or cancel button 760. The exit load or cancel button 760 may be provided on various of the other

- 145 -

screens to provide the operator with the option to exit the loading procedure where appropriate.

When the operator touches the continue button 752 on the loading procedure screen 732, a disposable pressure test screen 768 is produced on the display 664, one embodiment of which is illustrated in Fig. 29. Generally, the disposable pressure test screen 768 pictorially conveys to the operator that certain steps must be undertaken to allow for pressure testing of the disposable set 8 and how this may be affected by the operator. In this regard, a donor/patient access line clamp pictorial 769 pictorially conveys to the operator that the blood removal/return tubing assembly 20, specifically the interconnect tubing 38, to the donor/patient 4 must be sealed off. A donor/patient sample line clamp pictorial 770 pictorially conveys to the operator that the sample line of the sample subassembly 46 must also be sealed off as well. When the operator has completed these steps, the operator touches the continue button 752 and a test in progress screen 772 is displayed to the operator to pictorially and textually convey to the operator that the testing procedure is underway and such is illustrated in Fig. 30.

After the pressure test of the disposable set 8 is complete, an AC interconnect screen 776 is produced on the display 664 and one embodiment of which is illustrated in Fig. 31. The AC interconnect screen 776 pictorially conveys to the operator that the anticoagulant tubing assembly 50, specifically the spike drip member 52, of the

- 146 -

extracorporeal tubing circuit 10 needs to be fluidly interconnected with the AC bag (not shown), as well as generally how this step may be affected by the operator. When this step has been completed by the operator, the operator touches the continue button 752 on the display 664.

The AC interconnect is the last of the steps associated with the load icon 704 such that the operator is returned to the master screen 696. The master screen 696 now reflects the current status of the apheresis procedure and is illustrated in Fig. 32. That is, the color or shade of the load icon 704 is changed from the second color/shade to the third color/shade to that which indicates that all steps associated with the load icon 704 have been completed by the operator. Moreover, a status check 730 appears on the load system button 728 in the work area 688 as well. The load system button 728 is grayed out for the duration of the procedure and thus indicates that the system setup may not be repeated. Consequently, two different types of indications are provided to the operator of the current status regarding the loading procedure. The change in status of the donor/patient data entry portion of the apheresis procedure is also updated by presenting the information icon 708 in the status bar 676 in the second color/shade which indicates to the operator that it is now appropriate to begin this aspect of the apheresis procedure.



- 147 -

The operator enters the information entry portion of the apheresis procedure by touching the info button 780 on the display 664 of the master screen 696. This produces a donor/patient data screen 788 on the display 664, one embodiment of which is illustrated in Fig. 33. The donor/patient data screen 788 which includes a sex-type button 792, a height button 796, and a weight button 808. The operator may indicate the sex of the donor/patient 4 by touching the relevant portion of the split sex-type button 792 and the selected sex may be displayed to the operator (e.g, via color differentiation). Moreover, the operator may enter the height and weight of the donor/patient 4 by touching the height button 796 and the weight button 808, respectively. When the height button 796 and weight button 808 are engaged by the operator, a keypad 804 is superimposed over the button whose information is to be entered as illustrated in Fig. 34. The keypad 804 may be used to enter the donor/patient's 4 height and weight and this information may also be displayed to the operator.

The information entered by the operator on the donor/patient data screen 788 is used to calculate, for instance, the donor/patient's 4 total blood volume which is presented in a total blood volume display 790 on the donor/patient data screen 788. The donor/patient's 4 total blood volume may be utilized in the determination of various parameters associated with the apheresis procedure and/or in the estimation of the number of blood components which are anticipated to be collected in the procedure.

- 148 -

When the operator has completed these data entry procedures, the operator touches the continue button 752 which will be displayed on the bottom of the donor/patient data screen 788 after all requested information has been  
5 input.

A lab data entry screen 810 is generated on the computer display 664 after the steps associated with the donor/patient data screen 788 have been completed and as indicated by the operator, one embodiment of which is  
10 illustrated in Fig. 35. The lab data entry screen 810 requests the operator to enter the time for the collection procedure by touching a donation time button 840 which results in the keypad 804 being superimposed over the donation time button 832 (not shown). The donation time  
15 entered by the operator will be displayed on a time display 860, which specifies the duration for the procedure. Moreover, the donation time entered by the operator may also be displayed on the donation time button 840. The donation time is used, for instance, to predict the number  
20 of the blood component(s) (e.g., platelets, plasma) which is anticipated to be collected during the procedure.

The lab data screen 810 also prompts the operator to enter the donor/patient's 4 hematocrit by touching a hematocrit button 842. This results in the keypad 804  
25 being superimposed over the hematocrit button 842. The operator may then enter the donor/patient's 4 hematocrit (e.g., as determined via laboratory analysis of a blood sample from the donor/patient 4) and such may be displayed

- 149 -

on the hematocrit button 842. The donor/patient's 4 hematocrit is also utilized by one or more aspects of the apheresis procedure.

The lab data screen 810 also prompts the operator to enter the donor/patient's 4 platelet precount by touching a platelet precount button 843. This results in the keypad 804 being superimposed over the platelet precount button 843. The operator may then enter the donor/patient's 4 platelet precount (e.g., as determined via laboratory analysis of a blood sample from the donor/patient 4) and such may be displayed on the platelet precount button 843. The donor/patient's 4 platelet precount is also utilized by one or more aspects of the apheresis procedure.

Once the operator has entered all of the requested information, the operator touches the continue button 752 which returns the operator to the master screen 696 which now reflects the current status of the apheresis procedure and as illustrated in Fig. 36. Since all of the steps associated with the information icon 708 have now been completed, the color/shade of the information icon 708 is changed from the second color/shade to the third color/shade to convey to the operator that all associated steps have been completed. Moreover, a status check 784 appears on the donor/patient info button 780 in the work area 688 as well. Consequently, two different types of indications are provided to the operator of the current status of this aspect of the apheresis procedure. Moreover, the change in status of the collection icon set

- 150 -

712 of the apheresis procedure is updated by changing the color/shade of the donor/patient prep icon 716 in the status bar 676 from the first color/shade to the second color/shade. A run button 802 is also now presented on the master screen 696 such that the steps associated with the collection icon set 712 may now be undertaken and further such that pictorial representations of the same may be provided to the operator.

The initial screen for steps associated with the collection icon set 712 is a donor/patient prep screen 812A which is illustrated in Fig. 37. The donor/patient prep screen 812A pictorially conveys to the operator the steps which must be undertaken in relation to the donor/patient 4 being fluidly interconnected with the blood component separation device. Initially, a donor/patient connect pictorial 816 is displayed which pictorially conveys to the operator that an access needle 32 must be installed on the donor/patient 4, as well as generally how this step may be affected by the operator. The word "CONNECT" is also positioned above the donor/patient connect pictorial 816 to provide a short textual instruction to the operator of the required action(s). The donor/patient connect pictorial 816 is disposed on the left side of the donor/patient prep screen 812A which indicates that this is the first step or substep associated with the donor/patient prep icon 716. In order to provide further indications of the desired order to the operator, the number "1" is also disposed adjacent the word "CONNECT."

- 151 -

The donor/patient prep screen 812A also displays an open pictorial 820 on the display 664. The open pictorial 820 pictorially conveys to the operator that the clamps 42 in the interconnect tubing 38 and the clamp in the tubing of the sample subassembly 46 must be removed, as well as generally how these steps may be affected by the operator. The word "OPEN" is also positioned above the open flow pictorial 820 to provide a short textual instruction to the operator of the required action(s). The open pictorial 820 is disposed to the right of the donor/patient connect pictorial 816 which indicates that the step(s) associated with the open pictorial 820 should be performed only after the step(s) associated with the donor/patient connect pictorial 816 have been completed. In order to provide further indications of the desired order to the operator, the number "2" is also disposed adjacent the word "OPEN."

The donor/patient prep screen 812A also displays a flow pictorial 824 on the display 664. The flow pictorial 824 pictorially conveys to the operator that there should now be a flow of blood from the donor/patient 4 into the blood removal/return tubing assembly 20, specifically the blood removal tubing 22, and in the sample tubing of the sample subassembly 46. The word "FLOW" is also positioned above the flow pictorial 824 to provide a short textual description to the operator of what should be occurring at this time. The flow pictorial 824 is disposed to the right of the open pictorial 820 which indicates that the conditions associated with the flow pictorial 824 should

- 152 -

occur only after the step(s) associated with the open pictorial 820 have been completed. In order to provide further indications of the desired order to the operator, the number "3" is also disposed adjacent the word "FLOW."

5 In summary, the work area 688 of the donor/patient prep screen 812A not only conveys to the operator what type of steps must be performed for this aspect of the apheresis procedure and how to generally perform these steps, but also specifies the order in which these steps should be  
10 performed by two methods. Initially, the pictorial graphics 816, 820, and 824 are sequentially displayed in left-to-right fashion. Moreover, the three steps are also numerically identified next to their associated one-word textual description.

15 Once the operator completes all of the steps associated with the donor/patient prep screen 812A, the operator touches the continue button 752 which results in the display of a second donor/patient prep screen 812B as illustrated in Fig. 38. The donor/patient prep screen 812B  
20 includes a close pictorial 828 which pictorially conveys to the operator to terminate the flow of blood from the donor/patient 4 to the sample bag of the sample subassembly 46 by clamping the sample line and generally how this step may be affected by the operator. The word "CLOSE" is also  
25 positioned above the close pictorial 828 to provide a short textual instruction to the operator of the required action(s). The close pictorial 828 is disposed on the left side of the donor/patient prep screen 812B which indicates

- 153 -

that this is the first step or substep associated with the donor/patient prep screen 812B. In order to provide an indication that this is in fact, however, the fourth step associated with the donor/patient preps, the number "4" is also disposed adjacent the word "CLOSE."

The donor/patient prep screen 812B also displays a seal pictorial 832 on the display 664. The seal flow pictorial 832 pictorially conveys to the operator that the sample line of the sample subassembly 46 should now be sealed off and generally how this step may be affected by the operator. The word "SEAL" is also positioned above the seal pictorial 832 to provide a short textual instruction to the operator of the required action(s). The seal pictorial 832 is disposed to the right of the close pictorial 828 which indicates that the step(s) associated with the seal pictorial 832 should be performed only after the step(s) associated with the close pictorial 828 have been completed. In order to provide further indications of the desired order to the operator, the number "5" is also disposed adjacent the word "SEAL" to indicate that this is actually the fifth step associated with the donor/patient preps.

In summary, the work area 688 of the donor/patient prep screen 812B not only conveys to the operator what type of steps must be performed for this aspect of the apheresis procedure and how to generally perform these steps, the work area 688 of the donor/patient prep screen 812B also specifies the order in which these steps should be

- 154 -

performed by two methods. Initially, the pictorials 828, 832, and 836 are sequentially displayed in left-to-right fashion. Moreover, the four steps are also numerically identified next to their associated one-word textual description.

Once the operator completes all of the donor/patient preps, the operator may touch the start prime button 846 on the donor/patient prep screen 812B which initiates the above-described blood prime of the extracorporeal tubing circuit 10 and blood processing vessel 352 and which results in the display of the run screen 844 illustrated in Fig. 39. The run screen 844 primarily displays information to the operator regarding the apheresis procedure. For instance, the run screen 844 includes a blood pressure display 848 (i.e., to convey to the operator the donor/patient's extracorporeal blood pressure), a platelet collect display 852 (i.e., to convey to the operator an estimate of the number of platelets which have been currently collected), a plasma collect display 856 (i.e., to convey to the operator the amount of plasma which has been currently collected), and a time display 860 (e.g., both the amount of time which has lapsed since the start of the collection procedure (the left bar graph and noted time), as well as the amount of time remaining in the collection procedure (the right bar graph and noted time). A control button (not shown) may be provided to toggle between the time remaining display and the start and stop time display.



- 155 -

The run screen 844 may also display, in the case of a single needle procedure (i.e., where only one needle is utilized to fluidly interconnect the donor/patient 4 with the blood component separation device 6), whether blood is being withdrawn from the donor/patient 4 (e.g., by displaying "draw in progress") or is being returned to the donor/patient 4 (e.g., by displaying "return in progress"). This information may be useful to the donor/patient 4 in that if the donor/patient 4 is attempting to maintain a certain blood pressure by squeezing an article to assist in removal of blood from the donor/patient 4, the donor/patient 4 will be provided with an indication to suspend these actions while blood is being returned to the donor/patient 4.

During the apheresis procedure, certain conditions may be detected by the apheresis system 2 which would benefit from an investigation by the operator. If one of these types of conditions is detected, an appropriate alarm screen is displayed to the operator. One embodiment of an alarm screen 864 is illustrated in Fig. 40. Initially, the alarm screen 864 textually conveys a potential problem with the system 2 via a problem graphic 868. The text may be useful in ensuring that the operator understands the problem. The alarm screen 864 also includes an action pictorial 872 which graphically conveys to the operator the action which should be taken in relation to the problem. These are actions which may be difficult or impossible for the system 2 to take itself. Finally, the alarm screen

- 156 -

includes an inspection results array 876 which allows the operator to indicate the results of the inspection. In the illustrated embodiment, the array 876 includes a blood leak button 906, a moisture button 908, and a no leak button 910.

Depending upon the selection made by the operator on the inspection results array 876, additional questions may be posed to the operator in further screens which require further investigation and/or which specify the desired remedial action. For instance, the supplemental alarm screen 878 of Fig. 41 may be generated by the operator touching the moisture button 908 on the alarm screen 864. The supplemental alarm screen 878 includes a remedial action pictorial 912 and remedial action text 914 to convey to the operator how to correct the identified problem.

The computer interface 660 may also allow the operator to initiate some type of corrective action based upon observations made by and/or conveyed to the operator. For instance, various screens of the interface 660 may include a trouble shooting button 898 which will generate one or more trouble shooting screens. These trouble shooting screens may include menus or the like to allow the operator to indicate what type of potential problem exists.

One embodiment of a trouble shooting screen 880 is presented in Fig. 42. The trouble shooting screen 880 includes a donor/patient tingling button 922. This button 922 would be utilized by the operator to attempt to remedy the effects of AC on the donor/patient 4 in response to the

- 157 -

donor/patient indicating a "tingling sensation" or, alternatively, "AC reaction." When the operator hits the "down arrow" of the donor/patient tingling button 922, the system 2 attempts to correct the condition in a predetermined manner (i.e., a predetermined protocol is employed preferably this protocol does not require operator actions or decisions). Once the tingling sensation no longer exists, the operator may use the "up arrow" button to return the bar on the donor/patient tingling button 922 to its original position.

The trouble shooting screen 880 also includes a clumping button 924. This button 924 would be utilized by the operator if any undesired clumping of the collected product (e.g., platelets) was observed. When the operator hits the "down arrow" of the clumping button 924, the system 2 attempts to correct the condition in a predetermined manner (i.e., a predetermined protocol is employed and preferably this protocol does not require operator actions or decisions). Once the clumping is no longer observed by the operator, the operator may use the "up arrow" button to return the bar on the clumping button 924 to its original position.

The trouble shooting screen 880 may also include a spillover button 916 and an "air in plasma line" button 918. The spillover button 916 would be engaged by the operator if red blood cells were observed in the platelet outlet tubing 66, in the platelet collect bag 84, and/or flowing beyond the RBC dam 232. Activation of the

- 158 -

spillover button 916 via the touch screen capabilities would result in the system 2 using a predetermined and preferably automatic protocol is performed by the system 2 to correct this condition. Similarly, if the operator  
5 observes air in the plasma line 918 and engages the button 918, the system 2 again will preferably automatically employ a predetermined protocol to correct this condition.

The "other problem button" 920 may be utilized to generate further trouble shooting screens to list further  
10 problems which may occur in the apheresis procedure. Again, preferably upon the operator touching the associated button indicative of a particular problem, a predetermined protocol will be preferably automatically employed to attempt to correct the same.

15 Upon completion of the collection portion of the apheresis procedure, the rinseback screen 884 is produced on the display 664 which indicates that the rinseback procedure will now be performed and which is illustrated in Fig. 44. Once the rinseback is completed, the color/shade  
20 of the donate icon 720 changes from the second color to the third color/shade to indicate that all steps associated with this aspect of the apheresis procedure have been completed. Moreover, the color/shade of the unload icon 724 will also change from the first color/shade to the  
25 second color/shade to indicate to the operator that the step(s) associated therewith may now be performed.

Upon completion of the rinseback, a run finish screen may be produced on the display 664 to provide the final

- 159 -

collection data as illustrated in Fig. 43 (e.g., the associated yields of platelets and plasma collected during the procedure) as well as the fact that the procedure is over (e.g., by displaying "run completed"). The operator may then touch the continue button 752.

Once the rinseback procedure is completed, an unload screen 892 will be presented on the display 664 and is illustrated in Fig. 45. The unload screen 892 may sequentially display a number of pictorials to the operator to convey the steps which should be completed to terminate the procedure. For instance, a seal/detach pictorial 900 may be initially displayed on the unload screen 892 to pictorially convey to the operator that the tubes leading to the platelet and plasma collect bag(s) 84, 94 should each be sealed such that the platelet and plasma collect bag(s) 84, 94 respectively, may be removed. Once the operator touches the continue button 752, a disconnect pictorial 902 may be presented on the unload screen 892 to pictorially convey to the operator that the access needle 32 should be removed from the donor/patient 4. Once the operator touches the continue button 752, a remove pictorial 904 is presented on the unload screen 892 to pictorially convey to the operator that the disposable set 8 should be removed from the blood component separation device 6 and disposed of properly.

The computer interface 660 provides a number of advantages. For instance, the computer interface 660 utilizes a three-way color/shade differentiation to

- 160 -

conveniently convey the status of the apheresis procedure to the operator. An icon is presented in one color/shade if the step(s) associated with the icon are not yet ready to be performed, while the icon is presented in another color/shade if the step(s) associated with the icon are ready to be performed or are being performed, while the icon is presented in yet another color/shade if the step(s) associated with the icon have been completed. Moreover, the computer interface 660 provides pictorials to the operator of at least certain of the steps of the apheresis procedure. Furthermore, the desired/required ordering of at least the fundamental steps of the apheresis procedure is conveyed to the operator. Finally, the interface 660 allows for correction of certain conditions, which after appropriate operator input, are remedied by the system 2 in accordance with a predetermined protocol.

The foregoing description of the present invention has been presented for purposes of illustration and description. Furthermore, the description is not intended to limit the invention to the form disclosed herein. Consequently, variations and modifications commensurate with the above teachings, and skill and knowledge of the relevant art, are within the scope of the present invention. The embodiments described hereinabove are further intended to explain best modes known of practicing the invention and to enable others skilled in the art to utilize the invention in such, or other embodiments and with various modifications required by the particular

- 161 -

application(s) or use(s) of the present invention. It is intended that the appended claims be construed to include alternative embodiments to the extent permitted by the prior art.

- 162 -

What is claimed is:

1. A method for processing blood in an apheresis system comprising a blood component separation device and a display device, said method comprising the steps of:

5 pictorially displaying on said display device at least a portion of steps of an apheresis procedure utilizing said blood component separation device and to be completed by an operator of said apheresis system.

2. A method, as claimed in Claim 1, wherein:

10 said pictorially displaying step comprises pictorially displaying said at least a portion of said steps in an order in which said at least a portion of said steps should be performed.

3. A method, as claimed in Claim 2, further comprising the step of:

15 numerically identifying said order in which said at least a portion of said steps should be performed.

4. A method, as claimed in Claim 1, wherein said apheresis system further comprises a blood processing channel and a blood processing vessel, and wherein:

20 said pictorially displaying step comprises:

providing a first pictorial indicative of a loading step, said loading step comprising loading said blood processing vessel within said blood processing channel;

25



- 163 -

providing a second pictorial indicative of an establishing a fluid interconnection step, said establishing a fluid interconnection step comprising fluidly interconnecting a donor/patient with said blood processing vessel; and

providing a third pictorial indicative of a separating blood components step, said separating blood components step comprising separating blood into a plurality of blood component types using said blood component separation device.

5. A method, as claimed in Claim 1, wherein:

said pictorially displaying step comprises displaying a pictorial of each step in said at least a portion of said steps, and displaying a pictorial for at least one substep associated with each said step of said at least a portion of said steps.

6. A method, as claimed in Claim 5, wherein:

said displaying a pictorial for at least one substep step is performed when said operator selects said associated step.

7. A method, as claimed in Claim 1, wherein:

said pictorially displaying step comprises displaying a pictorial for each step of said at least a portion of said steps, said method further comprising the step of displaying text for each said step of said at least a portion of said steps.

- 164 -

8. A method, as claimed in Claim 7, wherein:

said displaying text step comprises displaying no more than two words for each said step of said at least a portion of said steps which require operator action.

5 9. A method, as claimed in Claim 1, further comprising the step of:

displaying a status relating to said at least a portion of said steps.

10 10. A method, as claimed in Claim 9, wherein:

said displaying a status step comprises using at least one of color and shade differentiation.

11. A method, as claimed in Claim 9, wherein:

15 said pictorially displaying step comprises displaying a pictorial for each step of said at least a portion of said steps, said displaying a status step comprises presenting each said pictorial in one of a plurality of colors/shades, wherein a first color/shade indicates that each said step associated with said pictorial has not yet been performed and is not sequentially ready for performance, wherein a second color/shade indicates that 20 each said step associated with said pictorial is ready to be performed or is being performed, and wherein a third color/shade indicates that each said step associated with said pictorial is completed.

25 12. A method, as claimed in Claim 1, further comprising the step of:

providing an indication of said at least a portion of steps of said apheresis procedure which are completed.

- 165 -

13. A method, as claimed in Claim 12, wherein:

said providing an indication comprising providing first and second indications for each said step which is completed.

5       14. A method, as claimed in Claim 1, further comprising the steps of:

providing an indication of steps of said apheresis procedure which are being performed.

10       15. A method, as claimed in Claim 1, further comprising the step of:

providing an indication of steps of said apheresis procedure to be completed.

15       16. A method, as claimed in Claim 1, wherein said apheresis system further comprises a blood processing channel:

said apheresis procedure comprises the steps of introducing blood into said blood processing channel, separating said blood into a plurality of blood component types, and removing at least one of said blood component types from said blood processing channel.

20       17. A method, as claimed in Claim 16, further comprising the step of:

loading a blood processing vessel within said blood processing channel, wherein said introducing step comprises introducing said blood into said blood processing vessel.

25       18. A method for processing blood in an apheresis system comprising a blood component separation device and

- 166 -

at least one blood passageway, said method comprising the steps of:

instructing said apheresis system to address a first condition associated with said apheresis system by performing a first protocol, wherein said first condition relates to said method and may be addressed by at least said first protocol and a second protocol different from said first protocol;

introducing blood into said at least one blood passageway;

separating said blood into a plurality of blood component types;

removing at least one of said blood component types from said at least one blood passageway;

identifying an existence of said first condition to said apheresis system; and

performing said first protocol.

19. A method, as claimed in Claim 18, wherein:

said apheresis system further comprises a control device and said instructing step comprises programming said control device.

20. A method, as claimed in Claim 18, wherein:

said identifying step comprises observing at least one indication of said first condition.

21. A method, as claimed in Claim 18, wherein:

said apheresis system further comprises a computer, said identifying step comprises an operator of said

- 167 -

apheresis system inputting said existence of said first condition to said computer.

22. A method, as claimed in Claim 18, wherein:

5 said apheresis system further comprises a display, said identifying step comprises an operator of said apheresis system touching a predetermined area of said display which corresponds to said first condition.

23. A method, as claimed in Claim 22, wherein:

10 said predetermined area of said display comprises a graphical representation associated with said first condition.

24. A method, as claimed in Claim 23, wherein:

said graphical representation comprises text.

25. A method, as claimed in Claim 22, wherein:

15 said predetermined area is a pictorial of a button.

26. A method, as claimed in Claim 18, wherein said apheresis system further comprises a display, said method further comprising the step of:

20 presenting a first screen on said display to an operator of said apheresis system, said presenting step comprising displaying a first graphical representation associated with said first condition on said display and displaying a second graphical representation associated with a second condition associated with said apheresis system.

27. A method, as claimed in Claim 26, wherein:

said presenting step is in response to a predetermined input by said operator of said apheresis system.

- 168 -

28. A method, as claimed in Claim 26, wherein:

said presenting step is in response to a sensing of a potential existence of said first condition by said apheresis system.

5           29. A method, as claimed in Claim 18, wherein said at least one blood passageway comprises a blood processing channel and a blood processing vessel, said method further comprising the step of:

10               disposing said blood processing vessel within said blood processing channel, wherein said introducing step comprises introducing said blood into said blood processing vessel.

15           30. A method for processing blood in an apheresis system comprising a blood component separation device and at least one blood passageway associated with said blood component separation device, said method comprising the steps of:

introducing blood into said at least one blood passageway;

20           separating said blood into a plurality of blood component types;

removing at least one of said blood component types from said at least one blood passageway;

25           detecting a potential existence of a first condition associated with said apheresis system;

performing a first prompting step, said first prompting step comprising prompting an operator of said

- 169 -

apheresis system to perform an investigation of said  
apheresis system in relation to said first condition; and  
performing a second prompting step, said second  
prompting step comprising prompting said operator to  
5 specify a result of said investigation to said apheresis  
system.

31. A method, as claimed in Claim 30, wherein:

said detecting step is performed by said apheresis  
system.

10 32. A method, as claimed in Claim 30, wherein:

said performing a first prompting step comprises  
textually indicating said potential existence of said first  
condition to an operator of said apheresis system.

15 33. A method, as claimed in Claim 30, further  
comprising the step of:

graphically indicating to said operator of said  
apheresis system a protocol for performing said  
investigation.

34. A method, as claimed in Claim 33, wherein:

20 said graphically indicating step comprises utilizing  
text.

35. A method, as claimed in Claim 33, wherein:

said graphically indicating step comprises utilizing  
at least one pictorial.

25 36. A method, as claimed in Claim 30, wherein:

said performing a second prompting step comprises  
providing a plurality of predetermined results associated  
with said first condition to said operator.

- 170 -

37. A method, as claimed in Claim 30, further comprising the steps of:

specifying said result of said investigation; and

5 displaying at least one graphic to said operator of said apheresis system indicative of an action to be undertaken by said operator.

38. A method, as claimed in Claim 37, wherein:

said displaying step comprises providing text.

39. A method, as claimed in Claim 37, wherein:

10 said displaying step comprises providing at least one pictorial.

40. A method, as claimed in Claim 30, wherein said at least one blood passageway comprises a blood processing channel and a blood processing vessel, said method further comprising the step of:

15 disposing said blood processing vessel within said blood processing channel.

41. A disposable for an apheresis system comprising blood processing channel, said disposable comprising:

20 a blood processing vessel positionable in said channel and comprising a blood-related port communicating with an interior of said blood processing vessel; and

a support associated with said blood-related port, interfacing with an exterior surface of said blood processing vessel in overlapping relation with a portion of  
25 said blood processing vessel.



- 171 -

42. A disposable, as claimed in Claim 41, wherein:  
said support has a rigidity greater than a rigidity of  
a portion of said blood processing vessel adjacent said  
blood-related port.

5 43. A disposable, as claimed in Claim 41, wherein:  
said support is formed from a material having a  
greater durometer rating than a material forming a main  
body of said blood processing vessel.

10 44. A disposable, as claimed in Claim 41, wherein:  
said support comprises means for reducing deflection  
of said blood processing vessel in a region of said blood-  
related port when said blood processing vessel is  
pressurized within said blood processing channel.

15 45. A disposable, as claimed in Claim 41, wherein:  
said blood processing channel comprises first and  
second channel sidewalls, wherein channel housing further  
comprises a blood-related port slot which intersects with  
one of said first and second channel sidewalls and a recess  
formed on said one of said first and second channel  
20 sidewalls and containing at least part of said blood-  
related port slot, wherein said support of said blood  
processing vessel is positioned within said recess.

25 46. A disposable, as claimed in Claim 45, wherein:  
a thickness of said support is substantially equal to  
a thickness of said recess.

47. A disposable, as claimed in Claim 41, wherein  
said blood processing vessel further comprises:

a blood inlet port; and

- 172 -

a control port for controlling a radial position of at least one interface between red blood cells and an adjacent blood component type, wherein said blood-related port assembly comprises at least said control port.

5           48. A disposable, as claimed in Claim 47, wherein:

          said support comprises means for disposing said control port at a predetermined position within said blood processing channel and independent of a portion of said blood processing vessel through which said interface control port extends.

          49. A disposable, as claimed in Claim 47, wherein:

          said control port extends beyond an inner wall of said blood processing vessel into an interior of said blood processing vessel.

15           50. A disposable, as claimed in Claim 41, wherein:

          said blood-related port comprises at least one of a blood inlet port to said blood processing vessel, a red blood cell outlet port to said blood processing vessel, and a control port to said blood processing vessel for controlling a radial position of at least one interface between red blood cells and an adjacent blood component type.

          51. A disposable, as claimed in Claim 41, wherein:

          said support is fixedly attached to said blood-related port.

25           52. A disposable, as claimed in Claim 41, wherein:

          said support is integrally formed with said blood-related port.

- 173 -

53. A disposable, as claimed in Claim 41, wherein:  
said support is disposed about said blood-related  
port.

54. A disposable, as claimed in Claim 41, wherein:  
5 said support comprises means for disposing said blood-  
related port at a predetermined position within said blood  
processing channel and independent of a portion of said  
blood processing vessel through which said blood-related  
port extends.

10 55. A disposable for an apheresis system comprising  
a blood processing channel, said disposable comprising:  
a blood processing vessel positionable in said blood  
processing channel and comprising:

15 first and second radially spaced sidewalls when  
said blood processing vessel is positioned in said blood  
processing channel;

a blood inlet port interfacing with one of said  
first and second sidewalls;

20 means for directing blood through said blood  
inlet port and within said blood processing vessel at an  
angle relative to a reference line extending  
perpendicularly to a portion of said blood processing  
vessel adjacent said blood inlet port; and

a first blood component outlet port.

25 56. A disposable, as claimed in Claim 55, wherein:  
said angle is no greater than about 90°.

- 174 -

57. A disposable, as claimed in Claim 55, wherein:

said means for directing comprises means for directing blood through said blood inlet port and into said blood processing vessel in a direction which is substantially parallel with a direction of flow adjacent said blood inlet port.

58. A disposable, as claimed in Claim 55, wherein:

said means for directing comprises a vane disposed within said blood processing vessel between first and second sidewalls of said blood processing vessel.

59. A disposable, as claimed in Claim 58, wherein:

said vane is defined by a surface which is substantially parallel with a sidewall of said blood processing vessel through which said blood inlet port extends.

60. A disposable, as claimed in Claim 55, wherein:

said means for directing comprises means for directing blood through said blood inlet port and into said blood processing vessel in a direction which is substantially parallel to a sidewall of said blood processing vessel through which said blood inlet port extends.

61. A disposable, as claimed in Claim 55, wherein:

said disposable further comprises a second blood component outlet port, said first and second blood component outlet ports being disposed on opposite sides of said blood inlet port.

- 175 -

62. A disposable, as claimed in Claim 61, wherein:

said means for directing is further in a direction of  
said first blood component outlet port, and wherein a flow  
within said blood processing vessel to said second blood  
component outlet port passes by said blood inlet port.

63. A disposable, as claimed in Claim 55, wherein:

said blood processing vessel comprises inner and outer  
sidewalls, said blood inlet port interfacing with said  
inner sidewall, and wherein said means for directing  
further comprises means for reducing an effect of  
introducing said blood into said blood processing vessel on  
a flow along said outer sidewall past said blood inlet  
port.

64. A disposable, as claimed in Claim 55, wherein:

said blood processing vessel comprises first and  
second sidewalls, wherein said blood inlet port extends  
through one of said first and second sidewalls into an  
interior of said blood processing vessel, and wherein said  
means for directing comprises a generally vertically  
disposed slot.

65. A disposable, as claimed in Claim 55, wherein:

said first and second sidewalls are substantially  
planar surfaces and generally vertically extending.

66. A disposable for an apheresis system comprising

a channel, said disposable comprising:

a blood processing vessel positionable in said channel  
and comprising:

a whole blood inlet port;

- 176 -

a first blood component outlet port; and

a first tab extending vertically beyond adjacent portions of said blood processing vessel a sufficient distance whereby said first tab extends beyond said channel when said blood processing bag is positioned within said channel..

67. A disposable, as claimed in Claim 66, wherein:

said blood processing vessel comprises a seal formed along an upper edge of said blood processing vessel comprising a joinder of overlapping portions of said blood processing vessel, said first tab extending upwardly from said seal.

68. A disposable, as claimed in Claim 67, wherein:

said first tab is integrally formed with said seal.

69. A disposable, as claimed in Claim 66, wherein:

said first tab comprises at least one grip enhancing member.

70. A disposable, as claimed in Claim 66, further comprising:

a plurality of said first tabs spaced along a length of said blood processing vessel.

71. A disposable for an apheresis system comprising a channel, said disposable comprising:

a blood processing vessel positionable in said channel and comprising:

first and second ends;

- 177 -

a first connector positioned between said first and second ends and communicating with an interior of said blood processing vessel;

5 a second connector positioned between said first and second ends, communicating with said interior of said processing vessel, and engaged with said first connector;

a blood inlet port communicating with said interior of said blood processing vessel and positioned between said first and second connectors; and

10 a first blood component outlet port communicating with said interior of said blood processing vessel and positioned between said first and second connectors.

72. A disposable, as claimed in Claim 71, wherein:

15 said blood processing vessel further comprises a control port positioned adjacent said first blood component outlet port for controlling a radial position of at least one interface between red blood cells and an adjacent blood component type, said first blood component outlet port and said control port being positioned between said first and  
20 second connectors, wherein at least a portion of a flow to said control port is in a direction opposite a flow to said first blood component outlet port.

73. A disposable, as claimed in Claim 71, wherein:

25 said first and second connectors are proximate said first and second ends, respectively, of said blood processing vessel, said blood processing vessel further comprising a plasma outlet port which interfaces with said inner sidewall of said blood processing vessel and is

- 178 -

positioned between said second connector and said second end.

74. A centrifuge rotor for an apheresis system comprising a blood processing channel associated with said centrifuge rotor and a blood processing vessel positionable within said channel, said centrifuge rotor comprising:

a rotatable rotor housing comprising a rotor sidewall, a rotor top, and a blood processing vessel loading aperture, said loading aperture comprising first and second apertures, said first aperture being accessible on an exterior surface of said rotor housing and extending only partially through said rotor housing, said second aperture intersecting with said first aperture and extending upwardly through said rotor top;

a channel mounting interconnected with said rotor top of said rotor housing, said channel being associated with said channel mounting.

75. A centrifuge rotor, as claimed in Claim 74, wherein:

said loading aperture is substantially L-shaped.

76. A centrifuge rotor, as claimed in Claim 74, wherein:

said loading aperture is defined at least in part by a generally concave surface.

77. A centrifuge rotor, as claimed in Claim 74, further comprising:

means for directing said blood processing vessel into said second aperture of said loading aperture.



- 179 -

78. A centrifuge rotor, as claimed in Claim 74, further comprising:

a rotary drive assembly interconnected with said rotor housing; and

5 a single gear rotatably interconnecting said channel mounting and said rotor housing.

79. A centrifuge rotor, as claimed in Claim 78, wherein:

10 a first reference axis extends radially outwardly from and perpendicularly to a rotational axis of said rotor housing and bisects said first aperture of said loading aperture, wherein a second reference axis coincides with a rotational axis of said single gear and extends through said rotational axis, and wherein said first and second  
15 reference axes are separated by a first angle, said first angle being less than 90°.

80. A centrifuge rotor, as claimed in Claim 79, wherein:

said first angle is between about 20° and about 40°.

20 81. A centrifuge rotor, as claimed in Claim 74, further comprising:

at least one counterweight attached to said rotor housing adjacent said first aperture of said loading aperture, wherein said at least one counterweight is  
25 radially offset in relation to said first aperture.

82. A method for loading a blood processing vessel into a channel associated with a centrifuge rotor, said method comprising the steps of:

- 180 -

inserting said blood processing vessel into an opening  
in said rotor;

deflecting said blood processing vessel upwardly  
against a portion of said rotor through a generally  
5 upwardly extending opening in said rotor;

grasping said blood processing vessel after said  
deflecting step; and

loading said blood processing vessel into said  
channel.

10 83. A centrifuge rotor for an apheresis system  
comprising a channel and a blood processing vessel  
positioned within said channel, said centrifuge rotor  
comprising:

a rotor housing;

15 a channel mounting, wherein said channel is associated  
with said channel mounting;

a single gear rotatably interconnecting said rotor  
housing and said channel mounting; and

20 a rotary drive assembly interconnected with said rotor  
housing.

84. A centrifuge rotor, as claimed in Claim 83,  
further comprising at least one counterweight.

85. A centrifuge rotor, as claimed in Claim 83,  
further comprising:

25 means for maintaining rotational balance of said  
centrifuge rotor.

86. A centrifuge rotor, as claimed in Claim 83,  
wherein:

- 181 -

said rotor housing comprises a rotor sidewall and a blood processing vessel loading aperture which is accessible on an exterior surface of said rotor housing and which extends upwardly through said rotor housing, wherein  
5 a first reference axis extends radially outwardly from and perpendicularly to a rotational axis of said rotor housing and bisects that portion of said loading aperture interfacing with said rotor housing, wherein a second reference axis coincides with a rotational axis of said  
10 single gear and extends through said rotational axis, and wherein said first and second reference axes are separated by a first angle, said first angle being less than 90°.

87. A centrifuge rotor, as claimed in Claim 86, wherein:

15 said first angle is between about 20° and about 40°.

88. A centrifuge rotor, as claimed in Claim 86, further comprising:

at least one counterweight attached to said rotor housing and radially offset in relation to said loading  
20 aperture.

89. A blood processing channel assembly for an apheresis system comprising a blood component separation device, said channel assembly comprising:

a channel housing interconnectable with said blood  
25 component separation device; and

a generally concave blood processing channel associated with said channel housing, wherein for at least a portion of a length of said channel said channel

- 182 -

comprises an upper lip formed on an upper section of said channel.

90. A channel assembly, as claimed in Claim 89, wherein:

5        said channel comprises first and second sidewalls and wherein for at least a portion of said length of said channel at least one of said first and second sidewalls has a generally C-shaped configuration.

10       91. A channel assembly, as claimed in Claim 89, wherein:

      said channel extends curvilinearly about a rotational axis of said channel housing and comprises an inner channel wall, an outer channel wall, and a channel base positioned between said inner and outer channel walls, and wherein for  
15       said at least a portion of a curvilinear extent of said channel a substantial portion of one of said inner and outer channel walls is substantially planar and the other of said inner and outer channel walls has a generally C-shaped configuration.

20       92. A channel assembly, as claimed in Claim 89, wherein said channel extends curvilinearly about a rotational axis of said channel housing in a first direction, said channel further comprising:

      a first cell separation stage, wherein blood is  
25       separated into a plurality of blood component types in said first cell separation stage;

      a cell dam positioned in said first direction from said first stage; and

- 183 -

a second stage positioned in said first direction from said cell dam and extending from said cell dam to a plasma outlet region, said second stage further comprising a platelet outlet region.

5           93. A channel assembly, as claimed in Claim 92, wherein said channel comprises inner and outer channel walls and wherein:

          said at least a portion of said length of said channel comprises said first stage, said cell dam, and said  
10       platelet outlet region, and wherein said inner and outer channel walls in said second stage from said platelet outlet region to said plasma outlet region are substantially vertical and planar surfaces.

          94. A channel assembly, as claimed in Claim 92,  
15       wherein said channel comprises inner and outer channel walls and wherein:

          said at least a portion of said length of said channel comprises said first stage, wherein said inner and outer channel sidewalls in said second stage from said platelet  
20       outlet region to said plasma outlet region are substantially vertical and planar surfaces, and wherein a width of said channel throughout said second stage from said platelet outlet region to said plasma outlet region is less than a width of said channel throughout said first  
25       stage.

          95. A channel assembly, as claimed in Claim 89, further comprising:

- 184 -

a disposable blood processing vessel positioned in said channel.

96. A blood processing vessel, as claimed in Claim 95, wherein:

5           substantially an entirety of a corresponding part of said blood-containing volume of said blood processing vessel is disposed below said upper lip and when blood is contained in said processing vessel a width of said processing vessel is greater than a width of said channel  
10           at said upper lip.

97. A channel assembly, as claimed in Claim 95, wherein:

          said disposable blood processing vessel is of a sufficient rigidity to be free-standing and to be loaded  
15           into said channel below said lip, and is yet of sufficient flexibility to substantially conform to a portion of said channel disposed below said lip when said blood processing vessel is pressurized.

20           98. A channel assembly, as claimed in Claim 89, wherein:

          said channel further comprises a channel base comprising a notch.

          99. A channel assembly, as claimed in Claim 89, wherein:

25           said channel further comprises a mid channel section disposed vertically below said upper channel section and a lower channel section disposed vertically below said mid channel section, wherein a width of said mid channel

- 185 -

section is greater than a width of each of said upper and lower channel sections.

100. A method for processing blood in an apheresis system comprising a blood processing vessel and a channel, said method comprising the steps of:

loading said blood processing vessel in said channel, said loading step comprising directing at least a portion of said blood processing vessel through a first channel section having a first width into a second channel section having a second width, said second width exceeding said first width;

providing blood to said blood processing vessel; and collecting at least one type of blood component from said blood.

101. A method, as claimed in Claim 100, wherein:

said loading step comprising utilizing a blood processing vessel having a sufficient rigidity to be free-standing in said channel and for said at least a portion of said blood processing vessel to be directed through said first channel section and into said second channel section, and yet having sufficient flexibility to substantially conform to a coinciding portion of said channel during said providing and collecting steps.

102. A method, as claimed in Claim 100, wherein:

said loading step comprises disposing substantially an entirety of an internal volume of said at least a portion of said blood processing vessel below said first channel section.

- 186 -

103. A method, as claimed in Claim 100, wherein:

said providing step comprises expanding said at least a portion of said blood processing vessel to a width greater than said first width of said first channel section.

5

104. A method, as claimed in Claim 100, wherein:

said blood processing vessel comprises at least one seal where one part of said blood processing vessel is joined to another part of said blood processing vessel, said method further comprising the step of:

10

providing resistance to a pulling apart of said at least one seal during said providing and collecting steps.

105. A method, as claimed in Claim 100, wherein:

said blood processing vessel comprises at least one seal where one part of said blood processing vessel is joined to another part of said blood processing vessel, said method further comprising the step of:

15

supportably engaging at least part of said at least one seal during said providing and collecting steps.

106. A method, as claimed in Claim 100, wherein:

20

said blood processing vessel comprises upper and lower seals, wherein a first length of said upper seal is disposed in said first channel section, said method further comprising the step of:

providing resistance to a pulling apart of said upper and lower seals during said providing and collecting steps.

25

107. A method, as claimed in Claim 100, further comprising the step of:



- 187 -

configuring said channel to retain said blood processing vessel within said channel during said providing and collecting steps.

108. A method, as claimed in Claim 100, wherein:

5       said first channel section and said second channel section extend for only a portion of a length of said channel.

109. A blood primable blood processing channel assembly for an apheresis system, comprising:

10       a channel housing interconnectable with said centrifuge rotor and comprising a blood processing channel, said channel comprising a first cell separation stage and wherein a remainder of said channel comprises at least one other stage, said channel further comprising a blood inlet and a red blood cell outlet associated with said first cell separation stage, wherein blood provided to said channel through said blood inlet has a first hematocrit and red blood cells removed from said channel through said red blood cell outlet have a second hematocrit, wherein a ratio of a volume of said remainder of said channel to a volume of said first cell separation stage is less than one-half of one less than the ratio of the second hematocrit to the first hematocrit.

15       

20       

110. A channel assembly, as claimed in Claim 109, wherein:

25       

      said channel extends curvilinearly about a rotational axis of said channel housing in a first direction, said channel further comprising a red blood cell dam positioned

- 188 -

in said first direction from said first cell separation stage, a platelet collection area positioned in said first direction from said cell dam, a plasma collection area positioned in said first direction from said platelet collection area, and an interface control region positioned in said first direction from said plasma collection area for controlling a radial position of at least one interface between red blood cells and an adjacent blood component type, wherein blood introduced into said channel is separated into layers of red blood cells, white blood cells, platelets, and plasma in said first cell separation stage.

111. A channel assembly, as claimed in Claim 110, wherein:

15       said channel further comprises means for providing said plasma to said interface control region before any of said red blood cells flow beyond said red blood cell dam in said first direction.

112. A channel assembly, as claimed in Claim 110, wherein:

20       said channel further comprises means for providing at least one of said blood, said red blood cells, said white blood cells, said platelets, and said plasma throughout an entirety of said channel before any of said red blood cells flow beyond said red blood cell dam in said first direction.

113. A channel assembly, as claimed in Claim 110, wherein:

- 189 -

a reference circle having an origin at said rotational axis intersects on said red blood cell dam at a predetermined position, and wherein a ratio of a volume of said channel disposed inside of said reference circle to a  
5 volume of said channel disposed outside of said reference circle is no greater than about 0.25.

114. A channel assembly, as claimed in Claim 110, wherein:

when said first hematocrit is about 0.47 and said  
10 second hematocrit is about 0.75, said ratio of said volume of said remainder of said channel to said volume of said first cell separation stage is about 0.3.

115. A channel assembly, as claimed in Claim 110, wherein:

15 a width of said channel between said platelet collection area and said plasma collection area is less than a width of said channel throughout said first cell separation stage.

116. A channel assembly, as claimed in Claim 115,  
20 wherein:

said width of said channel between said platelet collection area and said plasma collection area is substantially constant.

117. A channel assembly, as claimed in Claim 110,  
25 wherein:

said channel further comprises a blood inlet region proximate said first cell separation stage, wherein a first reference ray extends from said rotational axis through

- 190 -

said blood inlet region and a second reference ray extends from said rotational axis and through said interface control region, wherein at least part of a flow to said interface control region is in said first direction and  
5 wherein said first and second rays are separated by a first radial distance relative to said rotational axis in said first direction, said first radial distance being greater than about 330°.

118. A channel assembly, as claimed in Claim 110,  
10 wherein:

said channel further comprises means for limiting a flow to said interface control region in a second direction opposite said first direction to said red blood cells.

119. A channel assembly, as claimed in Claim 110,  
15 wherein:

an angular extent of said channel about said rotational axis is greater than about 360° and less than about 390°.

120. A channel assembly, as claimed in Claim 109,  
20 further comprising:

a blood processing vessel disposed in said channel;  
means for displacing air from said blood processing vessel; and

means for priming said blood processing vessel with  
25 blood.

121. A system, as claimed in Claim 120, wherein:

said means for priming comprises a configuration of said blood processing channel.

- 191 -

122. A system, as claimed in Claim 120, further comprising:

a donor/patient blood transfer assembly fluidly interconnected with said blood processing vessel, fluidly interconnectable with a donor/patient, and comprising an air receptacle, wherein air within said blood processing vessel is displaced by said means for displacing into said air receptacle.

123. An blood primable apheresis system, comprising:

a blood component separation device;

a channel housing interconnectable with said blood component separation device and comprising a blood processing channel;

a blood processing vessel disposed in said channel;

means for priming said blood processing vessel with blood; and

means for displacing air from said blood processing vessel.

124. A system, as claimed in Claim 123, wherein:

said means for priming comprises a configuration of said blood processing channel.

125. A system, as claimed in Claim 123, further comprising:

a donor/patient blood transfer assembly fluidly interconnected with said blood processing vessel, fluidly interconnectable with a donor/patient, and comprising an air receptacle, wherein air within said blood processing

- 192 -

vessel is displaced by said means for displacing into said air receptacle.

126. A system, as claimed in Claim 123, wherein:

5       said means for displacing air comprises a radially inwardmost part of said channel.

127. A channel assembly, as claimed in Claim 123, wherein:

10       said channel extends curvilinearly about a rotational axis of said channel housing in a first direction, said channel comprising a first cell separation stage, a red blood cell dam positioned in said first direction from said first cell separation stage, a platelet collection area positioned in said first direction from said cell dam, a plasma collection area positioned in said first direction from said platelet collection area, and an interface control region positioned in said first direction from said plasma collection area for controlling a radial position of at least one interface between red blood cells and an adjacent blood component type, wherein blood introduced into said channel is separated into layers of red blood cells, white blood cells, platelets, and plasma in said first cell separation stage.

128. A channel assembly, as claimed in Claim 127, wherein:

25       said means for priming comprises means for providing said plasma to said interface control region before any of said red blood cells flow beyond said red blood cell dam in said first direction.

- 193 -

129. A channel assembly, as claimed in Claim 127,  
wherein:

said means for priming comprises means for providing  
at least one of said blood, said red blood cells, said  
5 white blood cells, said platelets, and said plasma  
throughout an entirety of said blood processing vessel  
before any of said red blood cells flow beyond said red  
blood cell dam in said first direction.

130. A channel assembly, as claimed in Claim 127,  
10 wherein:

a reference circle having an origin at said rotational  
axis intersects on said red blood cell dam at a  
predetermined position, and wherein a ratio of a volume of  
said channel disposed inside of said reference circle to a  
15 volume of said channel disposed outside of said reference  
circle is no greater than about 0.25.

131. A channel assembly, as claimed in Claim 123,  
wherein:

said channel comprises a first cell separation stage  
20 and wherein a remainder of said channel comprises at least  
one other stage, said channel further comprising a blood  
inlet and a red blood cell outlet associated with said  
first cell separation stage, wherein blood provided to said  
channel through said blood inlet has a first hematocrit and  
25 red blood cells removed from said channel through said red  
blood cell outlet have a second hematocrit, wherein a ratio  
of a volume of said remainder of said channel to a volume  
of said first cell separation stage is less than one-half

- 194 -

of one less than the ratio of the second hematocrit to the first hematocrit.

132. A channel assembly, as claimed in Claim 127, wherein:

5       said means for priming comprises a width of at least a portion of said channel between said platelet collection area and said plasma collection area being less than a width of said channel throughout said first cell separation stage.

10       133. A channel assembly, as claimed in Claim 132, wherein:

      said width of said channel between said platelet collection area and said plasma collection area is substantially constant.

15       134. A channel assembly, as claimed in Claim 127, wherein:

      said channel further comprises a blood inlet region proximate said first cell separation stage, wherein a first reference ray extends from said rotational axis through  
20       said blood inlet region and a second reference ray extends from said rotational axis and through said interface control region, wherein at least part of a flow to said interface control region is in said first direction and wherein said first and second rays are separated by a first  
25       radial distance relative to said rotational axis in said first direction, said first radial distance being greater than about 330°.



- 195 -

135. A channel assembly, as claimed in Claim 127, wherein:

said channel further comprises means for limiting a flow to said interface control region in a second direction opposite said first direction to said red blood cells.

136. A method for priming an apheresis system with blood, said apheresis system comprising a channel housing and a blood processing vessel, said channel housing comprising a blood processing channel, said blood processing vessel being positioned within said channel and comprising a blood inlet port, a red blood cell outlet port, and an interface control port for controlling a radial position of at least one interface between red blood cells and an adjacent blood component type, said method comprising the steps of:

rotating said channel housing;

introducing an initial liquid into said blood processing vessel, said initial liquid comprising blood;

separating said blood into at least red blood cells, platelets, and plasma;

providing a restriction to a flow of red blood cells from said separating step beyond a red blood cell dam;

providing a flow of plasma to said interface control port before any of said red blood cells flow beyond said red blood cell dam.

137. A method, as claimed in Claim 136, wherein said blood further comprises white blood cells, said method further comprising the step of:

- 196 -

providing at least one of said blood, said red blood cells, said white blood cells, and said plasma throughout an entirety of said blood processing vessel, wherein said rotating step comprises:

5           rotating said channel housing at a first angular velocity between during at least a portion of a time between initiating said introducing step and completing said providing at least one of said blood, said red blood cells, said white blood cells, and said plasma step; and

10           rotating said channel housing at a second angular velocity greater than said first angular velocity during at least a portion of a time after completion of said providing at least one of said blood, said red blood cells, said white blood cells, and said plasma step.

15           138. A method, as claimed in Claim 136, wherein a donor/patient is fluidly interconnected with said blood processing vessel by an donor/patient blood transfer assembly and wherein said blood further comprises white blood cells, said method further comprising the step of:

20           initiating a flow of blood from said donor/patient into said donor blood transfer assembly; and

          providing at least one of said blood, said red blood cells, said white blood cells, and said plasma throughout an entirety of said blood processing vessel, wherein said  
25           rotating step comprises:

          rotating said channel housing at a first angular velocity during at least a portion of said initiating step;

- 197 -

rotating said channel housing at a second angular velocity, greater than said first angular velocity, between during at least a portion of a time between initiating said introducing step and completing said providing at least one of said blood, said red blood cells, said white blood cells, and said plasma step; and

rotating said channel housing at a third angular velocity, greater than said second angular velocity, during at least a portion of a time after completion of said providing at least one of said blood, said red blood cells, said white blood cells, and said plasma step.

139. A method, as claimed in Claim 138, wherein:

said first angular velocity ranges from about 180 RPM to about 220 RPM, said second angular velocity ranges from about 1,800 RPM to about 2,200 RPM, and said third angular velocity ranges from about 2,700 RPM to about 3,300 RPM.

140. A method, as claimed in Claim 136, wherein:

said providing a flow of plasma step comprises establishing control of a location of an interface between separated red blood cells and a buffy coat comprising white blood cells and lymphocytes proximate said red blood cell dam before any of said red blood cells flow beyond said red blood cell dam.

141. A method, as claimed in Claim 136, wherein said blood further comprises white blood cells, said method further comprising the step of:

providing at least one said blood, said red blood cells, said white blood cells, said platelets, and said

- 198 -

plasma to an entirety of said blood processing vessel before any of said red blood cells flow beyond said red blood cell dam.

142. A method, as claimed in Claim 136, wherein said  
5 blood processing vessel further comprises a red blood cell outlet port positioned between said blood inlet port and said interface control port, wherein said providing a flow of plasma is in a first direction, and wherein a flow to said red blood cell outlet port is in a second direction  
10 opposite said first direction, said method further comprising the step of limiting a flow to said interface control port in said second direction to red blood cells.

143. A method, as claimed in Claim 136, further comprising the step of:  
15 displacing air from said blood processing vessel.

144. A method, as claimed in Claim 136, wherein said apheresis system further comprises a donor/patient blood transfer assembly fluidly interconnected with each of said blood processing vessel and a donor/patient and comprising  
20 a blood reservoir and a single needle interacting with said donor, said method further comprising the steps of:

performing a first drawing step before said introducing step and comprising drawing blood from said donor/patient through a first portion of said donor/patient  
25 blood transfer assembly and into said blood reservoir.

145. A method, as claimed in Claim 144, further comprising the steps of;

terminating said performing a first drawing step;

- 199 -

priming said blood processing vessel with blood comprising the step of performing a second drawing step comprising drawing blood from said donor/patient through a second portion of said donor/patient blood transfer assembly, through said blood processing vessel and thereby for said introducing step, and into said blood reservoir.

146. A method for priming an apheresis system with blood comprising at least one of red blood cells, white blood cells, platelets, and plasma, said apheresis system comprising a channel housing, a blood processing vessel, a donor/patient blood transfer assembly fluidly interconnected with each of said blood processing vessel and a donor/patient, said channel housing comprising a channel with said blood processing vessel being positioned within said channel, said method comprising the steps of:

initiating a flow of blood from said donor/patient into said donor blood transfer assembly;

introducing a flow of blood into said blood processing vessel;

rotating said channel housing at a first angular velocity during at least a portion of time between starting said initiating step and starting said introducing step;

providing at least one of said blood, said red blood cells, said white blood cells, said platelets, and said plasma throughout an entirety of said blood processing vessel;

rotating said channel housing at a second angular velocity, greater than said first angular velocity, during

- 200 -

at least a portion of a time between starting said  
introducing step and completing said providing step; and

rotating said channel housing at a third angular  
velocity, greater than said second angular velocity, during  
5 at least a portion of a time after completion of said  
providing step.

147. A method, as claimed in Claim 146, wherein:

said first angular velocity ranges from about 180 RPM  
to about 220 RPM.

10 148. A method, as claimed in Claim 146, wherein:

said second angular velocity ranges from about 1,800  
RPM to about 2,200 RPM.

149. A method, as claimed in Claim 146, wherein:

15 said third angular velocity ranges from about 2,700  
RPM to about 3,300 RPM.

150. A method, as claimed in Claim 146, wherein:

said first angular velocity ranges from about 180 RPM  
to about 220 RPM, said second angular velocity ranges from  
about 1,800 RPM to about 2,200 RPM, and said third angular  
20 velocity ranges from about 2,700 RPM to about 3,300 RPM.

151. A method, as claimed in Claim 146, further  
comprising the step of:

priming said blood processing vessel with blood,  
wherein said blood is a first liquid introduced to said  
25 blood processing vessel.

152. A method, as claimed in Claim 146, further  
comprising the step of:

- 201 -

separating said blood into at least said red blood cells, said platelets, and said plasma throughout an entirety of said introducing step.

153. A method, as claimed in Claim 146, further comprising the steps of:

maintaining said flow of said blood into said blood processing vessel;

separating said blood into at least said red blood cells and said platelets throughout said introducing and maintaining steps; and

removing at least one of said red blood cells and said platelets from said blood processing vessel.

154. A method, as claimed in Claim 146, further comprising the step of:

displacing substantially all air from said blood processing vessel before said rotating said channel housing at a third angular velocity step.

155. A method for priming an apheresis system with blood, said apheresis system comprising a blood processing vessel, a donor/patient blood transfer assembly fluidly interconnected with each of said blood processing vessel and a donor/patient and comprising a blood reservoir and a single needle interacting with said donor/patient, said method comprising the steps of:

performing a first drawing step comprising drawing blood from said donor through a first portion of said donor/patient blood transfer assembly and into said blood reservoir;

- 202 -

terminating said performing a first drawing step;

priming said blood processing vessel with blood  
comprising the step of performing a second drawing step  
comprising drawing blood from said donor/patient through a  
5 second portion of said donor/patient blood transfer  
assembly, through said blood processing vessel, and into  
said blood reservoir.

156. A method for processing blood in an apheresis  
system comprising a channel housing having a blood  
10 processing channel and a blood processing vessel positioned  
within said channel, comprising the steps of:

rotating said channel housing at a rotational speed;

providing a flow to said blood processing vessel at a  
flow rate, said flow comprising blood;

15 separating said blood into a plurality of blood  
component types, wherein said separating step is performed  
in a first stage of said blood processing channel;

adjusting said rotational speed based upon any change  
in said flow rate; and

20 maintaining a packing factor ranging from about 11 to  
about 15 using said adjusting step, wherein said packing  
factor is equal to the square of said rotational speed,  
multiplied by an average distance from a rotational axis of  
said channel housing to an outer wall of channel in said  
25 first stage, multiplied by a sedimentation velocity of red  
blood cells at 1 G, multiplied by a volume of said channel  
in said first stage, divided by width of said channel in  
said first stage, and divided by said flow rate.



- 203 -

157. A method, as claimed in Claim 156, wherein:

said rotating step comprises rotating said channel housing at a first rotational speed;

said providing step comprises providing a flow to said blood processing vessel at a first flow rate, said method further comprising the steps of:

achieving a predetermined packing factor of blood component types within said blood processing vessel for said first speed and said first flow rate and during said separating step;

changing said first flow rate to a second flow rate; and

changing said first rotational speed to a second rotational speed to substantially maintain said predetermined packing factor and comprising said adjusting step.

158. A method, as claimed in Claim 157, wherein:

said second flow rate is greater than said first flow rate, and wherein said changing said first rotational speed to a second rotational speed step comprises said second rotational speed being greater than said first rotational speed.

159. A method, as claimed in Claim 157, wherein:

said second flow rate is less than said first flow rate, and wherein said changing said first rotational speed to a second rotational speed step comprises said second rotational speed being less than said first rotational speed.

- 204 -

160. A method, as claimed in Claim 156, wherein:

said predetermined packing factor is about 13 for a magnitude of said flow rate up to about 55 milliliters per minute.

5        161. A method, as claimed in Claim 156, further comprising the step of:

removing at least one of said plurality of blood component types from said blood processing vessel.

162. A method, as claimed in Claim 156, wherein:

10        said channel housing has an outer diameter of about 10 inches, and wherein during at least a portion of said separating step said blood is exposed to a centrifugal force of at least about 800 Gs.

163. A method, as claimed in Claim 162, wherein:

15        said centrifugal force is about 1,100 Gs.

164. A method for processing blood in an apheresis system comprising a blood processing vessel and a channel housing having a diameter of no greater than about ten inches and comprising a blood processing channel, said blood processing being positioned in said channel, said  
20        method comprising the steps of:

rotating said channel housing;

providing a flow to said blood processing vessel at a rate ranging from about 40 milliliters per minute to about  
25        70 milliliters per minute, said flow comprising blood;

separating said blood into a plurality of blood component types in a first stage of said channel;

- 205 -

maintaining a packing factor of blood component types in said first stage of said channel of at least 10 during said separating step; and

removing at least one of said plurality of blood component types from said blood processing vessel.

165. A method, as claimed in Claim 164, wherein:

said rotating step comprises rotating said channel housing at a rotational velocity greater than about 2,500 RPM.

166. A method, as claimed in Claim 164, wherein:

said rotating step comprises rotating said channel housing at a rotational velocity of about 3,000 RPM.

167. A method, as claimed in Claim 164, wherein:

said maintaining step a packing factor step comprises maintaining a packing factor of blood component types in said first stage of said channel of at least 10.2 during said rotating, providing, and separating steps.

168. A method, as claimed in Claim 164, wherein:

said separating step comprises the steps of directing said blood into said first stage, impeding a flow of red blood cells in a first direction beyond a red blood cell dam disposed at an end of said first stage, allowing platelets to flow in said first direction beyond said red blood cell dam, and reducing a sedimentation distance in said first separation stage progressing toward said red blood cell dam.

169. A blood processing channel assembly for an apheresis system, comprising:

- 206 -

a channel housing interconnectable with a centrifuge rotor;

5 a blood processing channel associated with said channel housing, wherein said channel extends curvilinearly about a rotational axis of said channel housing in a first direction, said channel comprising:

inner and outer channel walls and a channel base positioned therebetween,

10 a first cell separation stage comprising first and second ends, said second end being positioned in said first direction from said first end;

15 a cell dam positioned in said first direction from said first cell separation stage, wherein a width of said second end of said first cell separation stage is less than a width of said first end of said first cell separation stage; and

a first blood component collection stage.

170. A channel assembly, as claimed in Claim 169, wherein: a width of said channel in said first cell separation stages is progressively reduced proceeding from  
20 said first end to said second end.

171. A channel assembly, as claimed in Claim 169, wherein:

25 said first blood component collection stage comprises a platelet outlet port positioned in said first direction from said second end of first cell separation stage.

172. A disposable for an apheresis system comprising a blood processing channel, said disposable comprising:

- 207 -

a blood processing vessel positionable in said channel  
and comprising:

first and second interconnected sidewalls;

a blood inlet port; and

5 a platelet outlet port interfacing with one of  
said first and second sidewalls;

a contoured support disposed proximate said platelet  
outlet port and attached to said one of said first and  
second sidewalls on an exterior surface of said blood  
10 processing vessel in overlapping relation with said  
exterior surface of said blood processing vessel.

173. A disposable, as claimed in Claim 172, wherein:

said exterior surface of said blood processing vessel  
defined by said first and second sidewalls is substantially  
15 planar, said contoured support providing a discontinuity on  
said exterior surface defined by said one of said first and  
second sidewalls.

174. A disposable, as claimed in Claim 172, wherein:

said contoured support is hingedly interconnected with  
20 said one of said first and second sidewalls of said blood  
processing vessel.

175. A disposable, as claimed in Claim 172, wherein:

said contoured support is pivotally interconnected  
with said one of said first and second sidewalls of said  
25 blood processing vessel.

176. A disposable, as claimed in Claim 172, wherein:

said contoured support is integrally formed with said  
platelet outlet port.

- 208 -

177. A disposable, as claimed in Claim 172, wherein:  
said contoured support is generally triangularly-shaped.

178. A disposable, as claimed in Claim 172, wherein:  
5 a surface of said contoured support which interfaces with said one of said first and second sidewalls of said blood processing vessel comprises first and second sections having different angular dispositions.

179. A disposable, as claimed in Claim 172, wherein:  
10 said contoured support comprises means for directing platelets toward said platelet outlet port.

180. A disposable, as claimed in Claim 172, wherein:  
a surface of said contoured support which interfaces with said one of said first and second sidewalls of said  
15 blood processing vessel is contoured to direct platelets toward said platelet outlet port.

181. A disposable, as claimed in Claim 172, wherein:  
said contoured support is disposed vertically above said platelet outlet port.

182. A disposable, as claimed in Claim 172, wherein:  
20 said contoured support interfaces with said one of said first and second sidewalls and is separable from said blood processing vessel and said platelet outlet port.

183. A disposable, as claimed in Claim 172, wherein:  
25 said platelet outlet port comprises a platelet outlet tube, said contoured support further comprising a platelet outlet tube notch.

- 209 -

184. A disposable, as claimed in Claim 172, wherein:

said contoured support comprises a first surface which extends upwardly from said platelet outlet port and away from said one of said first and second sidewalls, a second surface which extends toward said one of said first and second sidewalls, and a third surface which interfaces with said one of said first and second sidewalls, extends toward said first surface, and intersects said first surface.

185. A channel assembly for an apheresis system comprising a centrifuge rotor, comprising:

a channel housing interconnectable with said centrifuge rotor and comprising a blood processing channel, wherein said blood processing channel comprises:

inner and outer channel walls;

a first portion of a generally funnel-shaped blood component collect well formed in one of said inner and outer channel walls, wherein a remainder of said blood component collect well is defined by a blood processing vessel disposed in said channel;

a blood component outlet assembly recess extending beyond said first portion of said generally funnel-shaped blood component collect well, wherein a blood component outlet assembly of said blood processing vessel is disposed in said blood component outlet assembly recess.

186. A channel assembly, as claimed in Claim 185, further comprising:

- 210 -

a cell dam disposed between said whole blood inlet port assembly slot and said platelet outlet port assembly slot.

187. A method for processing blood in an apheresis  
5 system comprising a channel housing and a blood processing vessel, said channel housing comprising a blood processing channel, said method comprising the steps of:

loading said blood processing vessel in said channel;  
positioning a contoured support between a portion of  
10 said blood processing vessel and a portion of said channel;  
rotating said channel housing;  
introducing blood into said blood processing vessel;  
separating red blood cells in said blood from  
platelets in said blood;

15 defining a generally funnel-shaped platelet collect well in said blood processing vessel comprising the steps of conforming said blood processing vessel to a shape of said channel and conforming said blood processing vessel to a shape of said contoured support interfacing with said  
20 blood processing vessel.

188. A method, as claimed in Claim 187, wherein:

said positioning step comprises positioning said contoured support between an outer wall of said channel and an outer wall of said blood processing vessel.

25 189. A method, as claimed in Claim 187, wherein:

said defining a generally funnel-shaped platelet collect well further comprises the step of moving said



- 211 -

contoured support into a predetermined position by said introducing step.

190. A method, as claimed in Claim 187, wherein:

5       said defining a generally funnel-shaped platelet collect port comprises pivoting said support relative to said blood processing vessel.

191. A method, as claimed in Claim 187, further comprising the steps of:

10       allowing substantially only separated platelets to flow into said platelet collect well; and

      removing said separated platelets from said platelet collect well.

192. A disposable assembly for use in an extracorporeal blood processing system, comprising:

15       blood removal conduit means for transferring whole blood from a donor;

      blood return conduit means for transferring uncollected blood components to a donor, a first portion of said blood removal conduit means and a first portion of said blood return conduit means being in direct fluid communication;

20       pressure-sensing means interconnected in direct fluid communication to one of said first portion of said blood removal conduit means and said first portion of said blood return conduit means, said pressure-sensing means being positionally responsive to pressure changes in said first portions of said blood removal conduit means and blood return conduit means.

- 212 -

193. A disposable assembly as claimed in Claim 192, wherein said pressure-sensing means includes a diaphragm member, and further comprising:

5 a molded cassette member, wherein said diaphragm member is mounted to the molded cassette member.

194. A disposable assembly as claimed in Claim 193, wherein:

10 said blood removal conduit means and blood return conduit means are each partially defined by corresponding integral passageways within said molded cassette member, and wherein one side of said diaphragm member is in fluid communication with one of said integral passageways and an opposing side of said diaphragm is externally accessible.

15 195. A disposable assembly as claimed in Claim 194, wherein said blood removal conduit means and blood return conduit means are each partially defined by corresponding U-shaped tubing loops that are supportably connected to and extend outwardly from said cassette member and that are fluidly interconnected to the corresponding integral  
20 passageways of said blood removal conduit means and blood return conduit means.

196. A disposable assembly as claimed in Claim 195, further comprising: a reservoir fluidly interconnected to one end of said blood return conduit means and defined  
25 within said molded cassette member for accumulating uncollected blood components.

197. A disposable assembly as claimed in Claim 192, further comprising:

- 213 -

a single needle, in direct fluid communication with said first portions of said blood removal conduit means and blood return conduit means, for removal of whole blood from and return of uncollected blood components to donor.

5           198. A disposable assembly as claimed in Claim 197, further comprising:

a molded cassette member having a reservoir fluid interconnected to said blood return conduit means for accumulating uncollected blood components.

10           199. A disposable assembly for use in an extracorporeal blood processing system comprising:

a single needle for removal of whole blood from a donor in a first mode and return of uncollected blood components to a donor in a second mode separate from said first mode;

15           blood removal conduit means fluidly interconnected to said single needle for transferring said whole blood from a donor in said first mode;

20           blood return conduit means fluidly interconnected to said single needle for transferring said uncollected blood components in said second mode;

a fluid reservoir interconnected to said one end of said blood return conduit means for accumulating said uncollected blood components in said first mode; and

25           gas holding means interconnected to said reservoir for receiving gas from said reservoir in said first mode and returning said sterile gas to said reservoir in said second mode.

- 214 -

200. A disposable assembly as claimed in Claim 199, further comprising:

5 a molded cassette member, wherein said reservoir and a portions of said blood removal and blood return conduit means are each integrally defined within said molded cassette member.

201. A disposable assembly as claimed in Claim 199, wherein:

10 said gas holding means comprises a flexible bag and a flexible tubing interconnecting said flexible bag and said reservoir.

202. A disposable assembly as claimed in Claim 199, further comprising:

15 a plurality of blood component conduit means fluidly interconnected to said reservoir for separately transferring uncollected blood components thereto.

203. A disposable assembly as claimed in Claim 202, further comprising:

20 at least one blood component collection means fluidly interconnected to a corresponding one of said blood component conduit means.

204. A device as claimed in Claim 194, wherein said opposing side of said diaphragm is recessed relative to a surrounding portion of said molded cassette member.

25 205. A device as claimed in Claims 195, further comprising:

at least one blood component conduit means for transferring separated blood components, said blood

- 215 -

component conduit means being partially defined by a corresponding integral passageway within said molded cassette member, and said blood component conduit means being partially defined by a corresponding U-shaped tubing loop that is supportively connected to and extends outwardly from said cassette member and that is fluidly interconnected to the corresponding integral passageway within said molded cassette member.

206. A device as claimed in Claim 205, wherein said U-shaped tubing loops are positioned relative to said cassette member to present an asymmetric configuration.

207. A device as claimed in Claim 205, wherein each of said integral passageways comprises a corresponding inlet to said cassette member, each of said inlets being positioned along a bottom edge of said molded cassette member, wherein fluid flow into each of said integral passageways progresses at least initially upward.

208. A disposable assembly for use in an extracorporeal blood processing system, comprising:

blood removal conduit means for transferring whole blood from a donor;

blood return conduit means for transferring uncollected blood components to a donor;

a first blood component conduit means for transferring a separated first blood component;

a molded cassette member having:

an integral internal reservoir for accumulating uncollected blood components and

- 216 -

interconnected to said blood return conduit means;

a first integral internal passageway partially defining said first blood component conduit means;

a first flexible tubing line interconnected at a first end to said first integral internal passageway, and interconnected at a second end to said integral internal reservoir;

a second flexible tubing line interconnected at a first end to said first integral internal passageway; and positioning means for supportably engaging first end portions of both said first and second flexible tubing lines to maintain said first end portions in a predetermined spaced relationship with an opening therebetween.

209. A device as claimed in Claim 208, wherein said positioning means is defined by an integral rim portion of said molded cassette member, said rim portion partially defining a window through said cassette member within which said first end portions are located.

210. A device as claimed in Claim 208, further comprising:

a second blood component conduit means for transferring a separated second blood component;

said molded cassette member further including:

- 217 -

a second integral internal passageway partially defining said second blood component conduit means;

5 a third flexible tubing line interconnected at a first end to said second integral internal passageway and interconnected at a second end to said integral internal reservoir;


a fourth flexible tubing line interconnected at a first end to said second integral internal passageway;

10 wherein said second ends of said first and third flexible tubing lines are fluidly interconnected to a top end of said integral internal reservoir, immediately adjacent to a sidewall thereof, wherein first and second separated blood components passing through said first and  
15 third flexible tubing lines into said integral internal reservoir will flow substantially down the inside of said sidewall during operation of said assembly.


211. A device as claimed in Claim 205, at least one of said blood removal conduit means and blood return conduit  
20 means being partially defined by a corresponding integral passageway within said molded cassette member, and further comprising:

a pressure sensing means interconnected to  
said molded cassette member for sensing pressure  
25 changes within said one integral passageway partially defining one of said blood removal conduit means and blood return conduit means.

FIG. 1

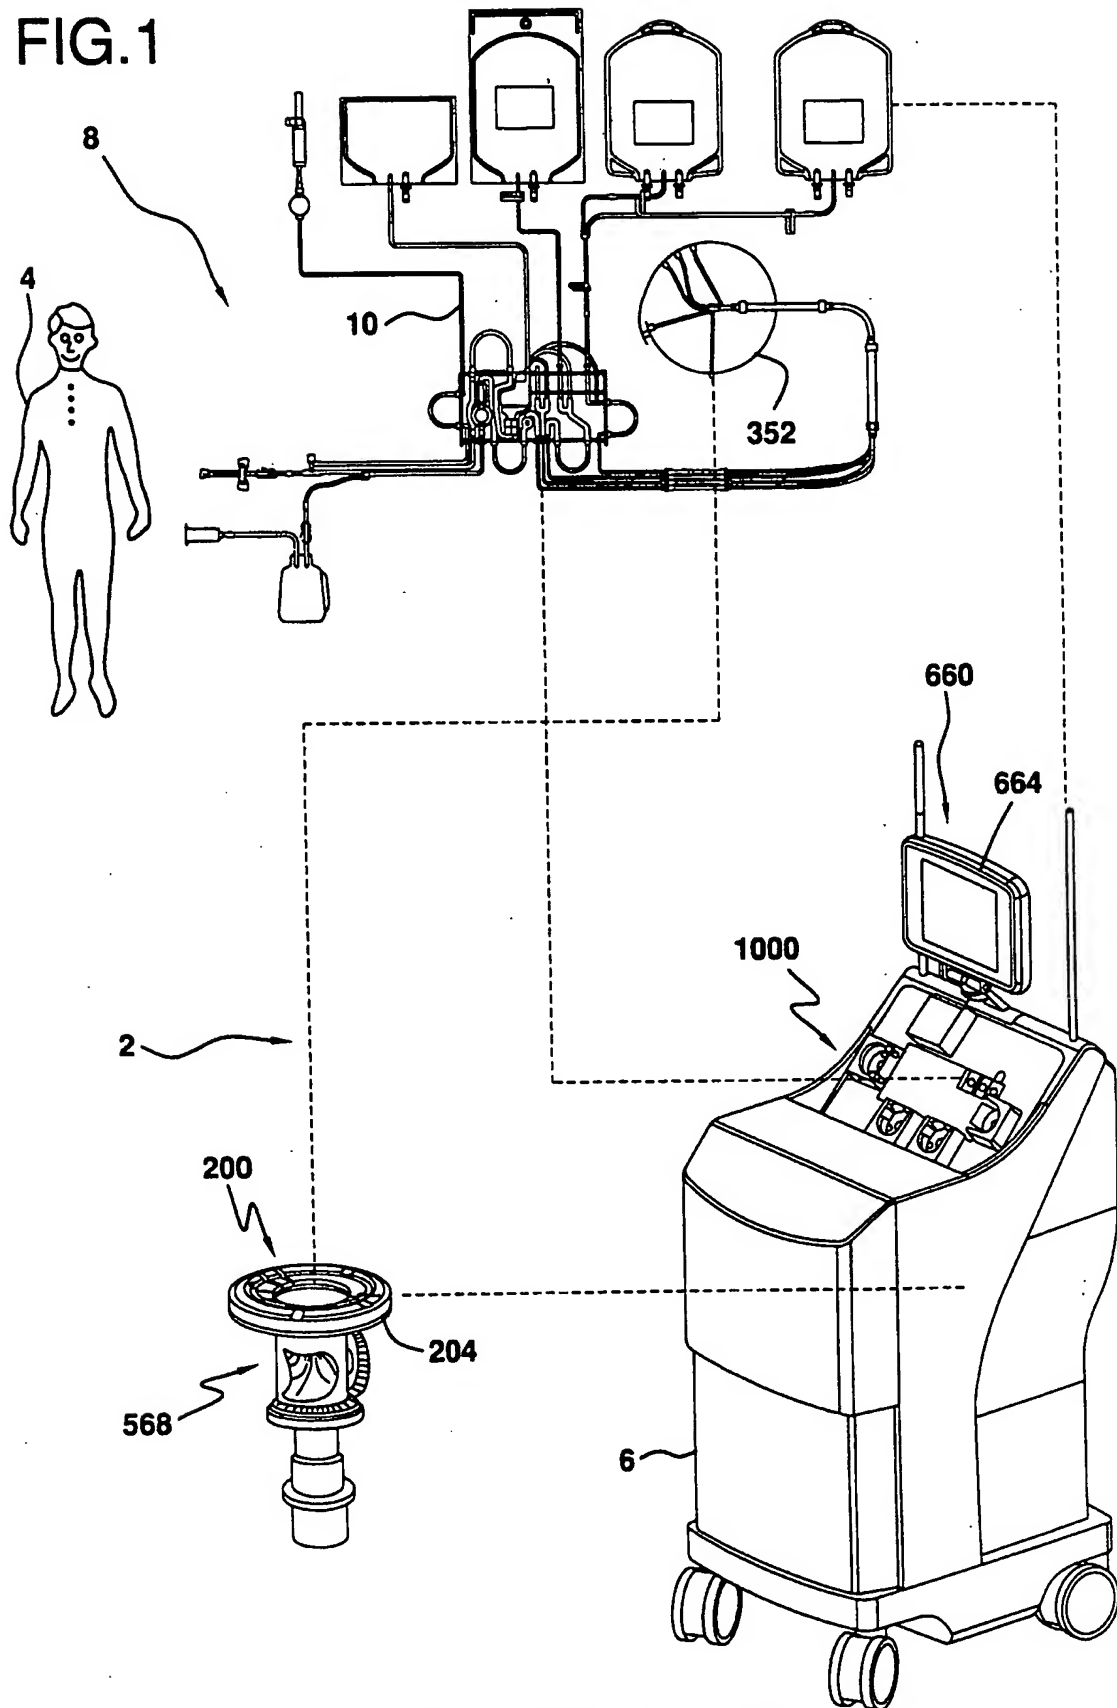



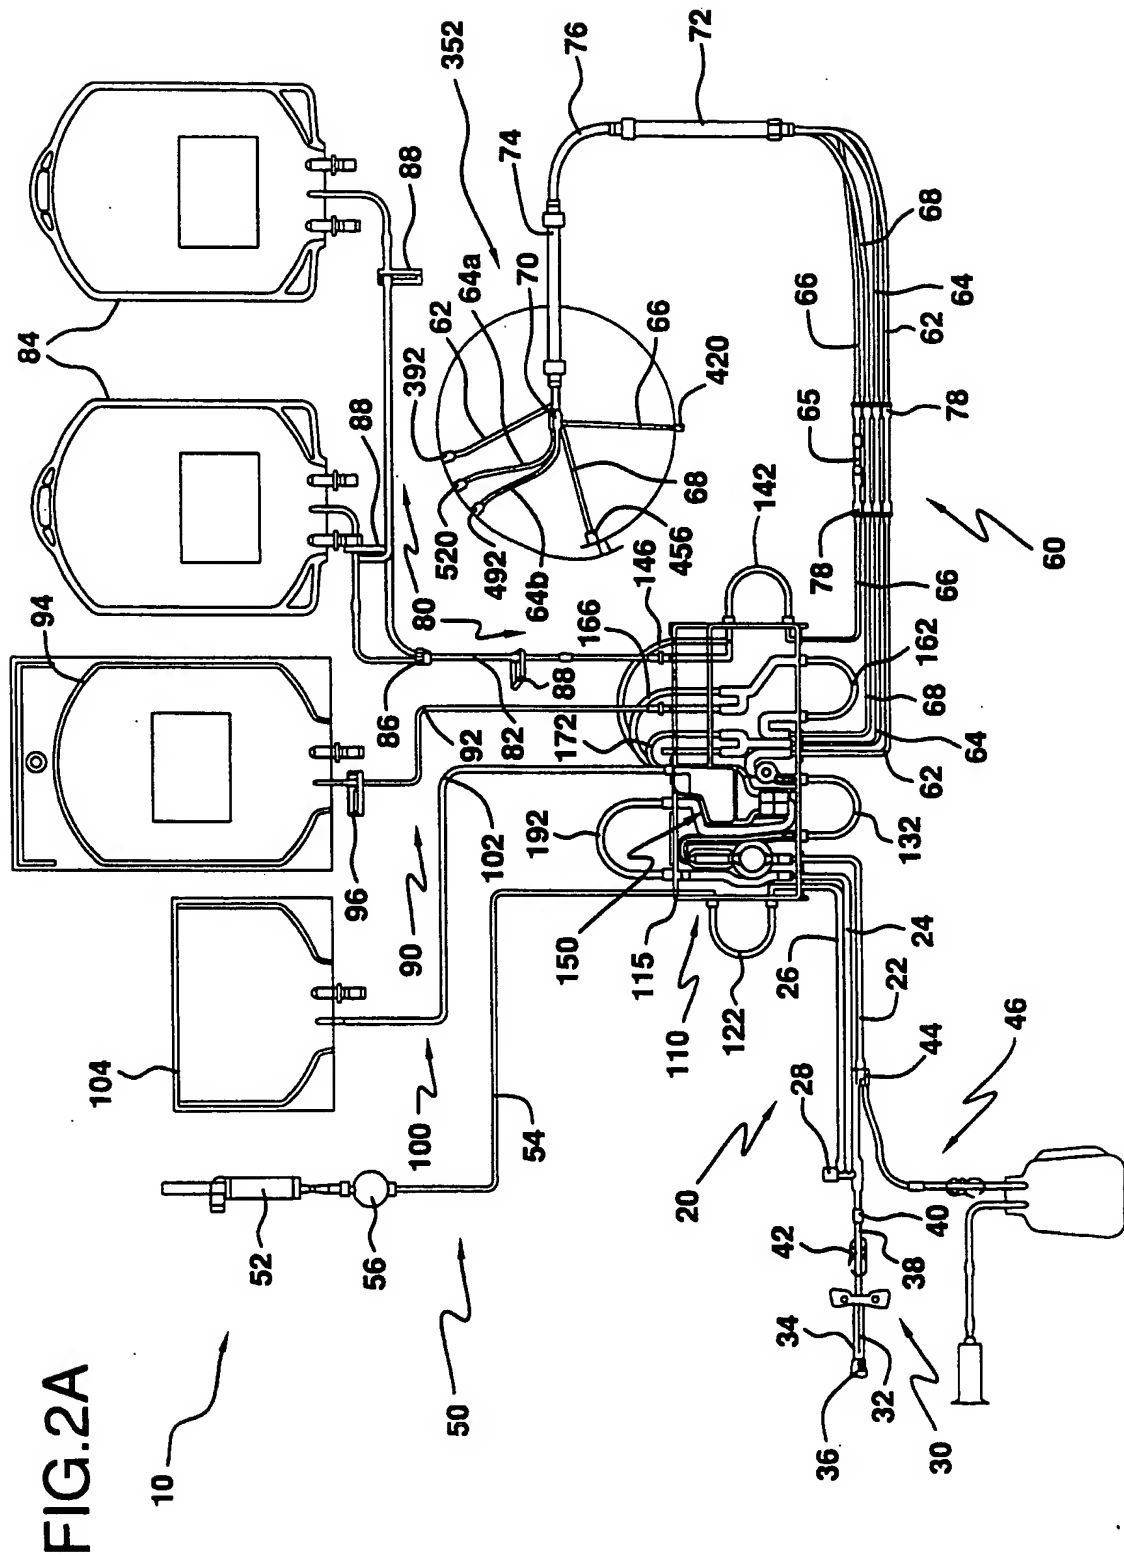

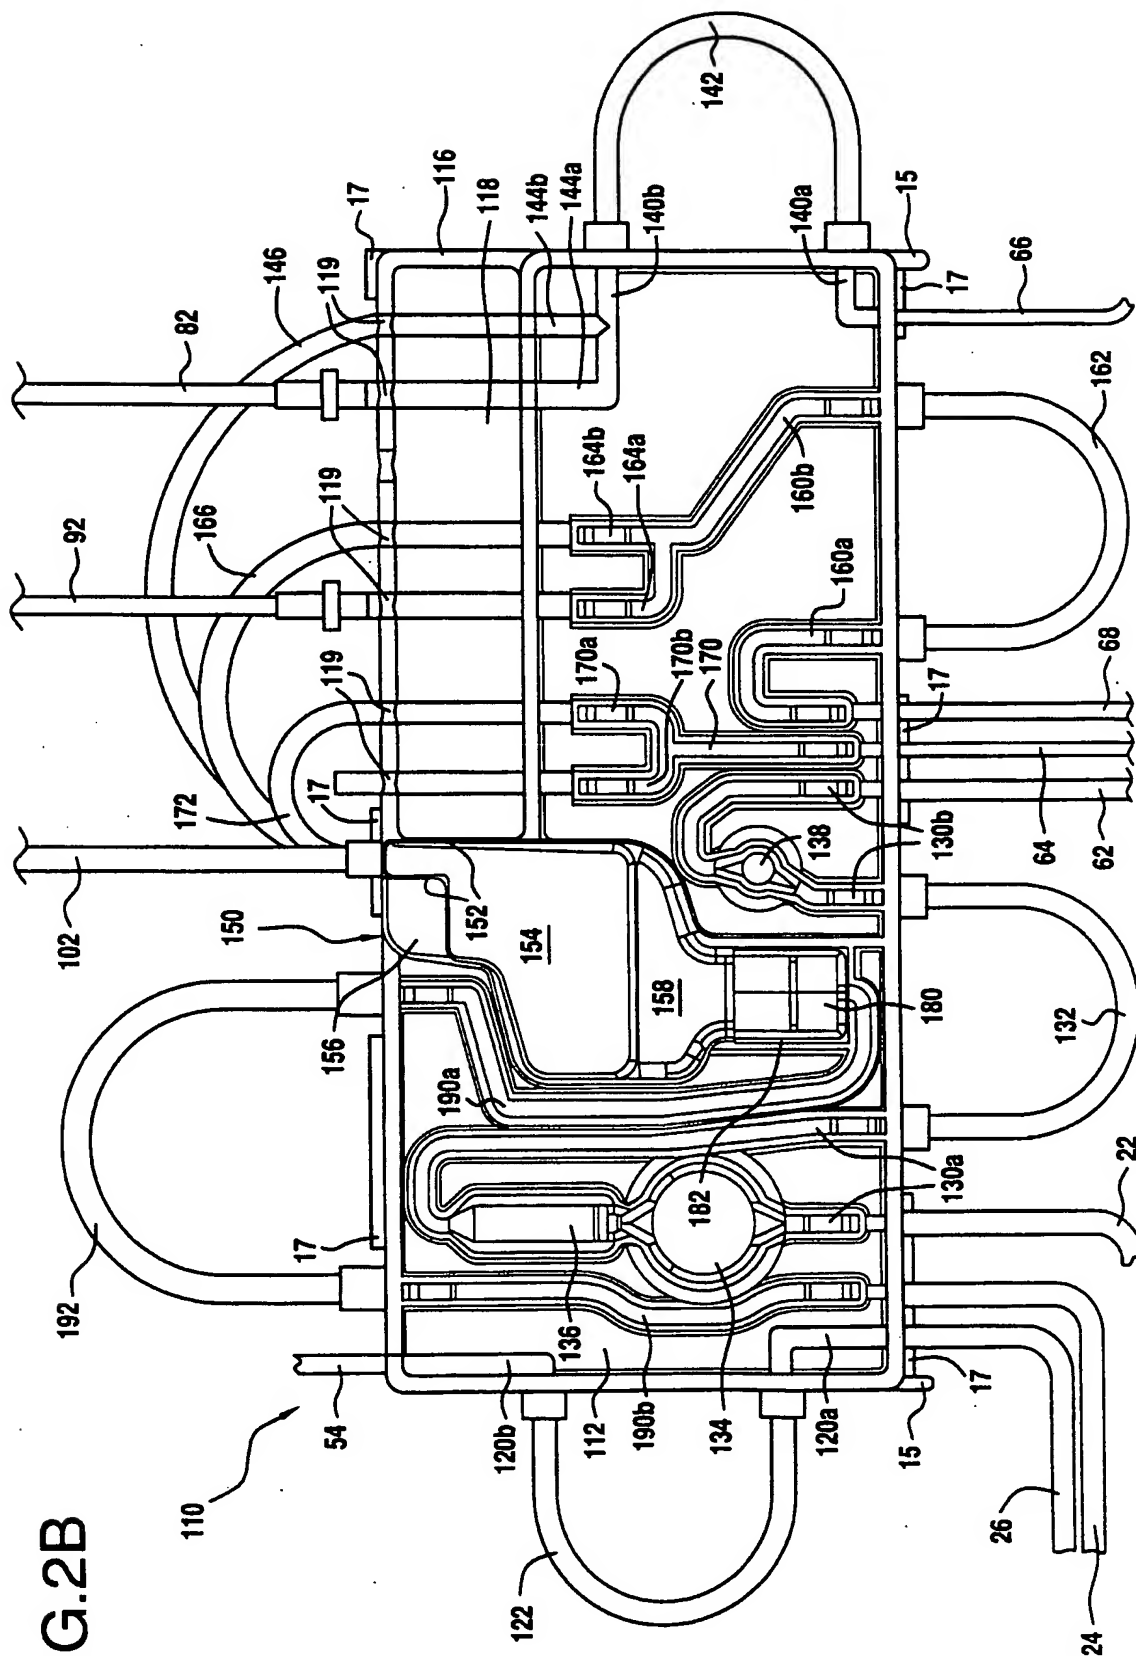


FIG. 2B

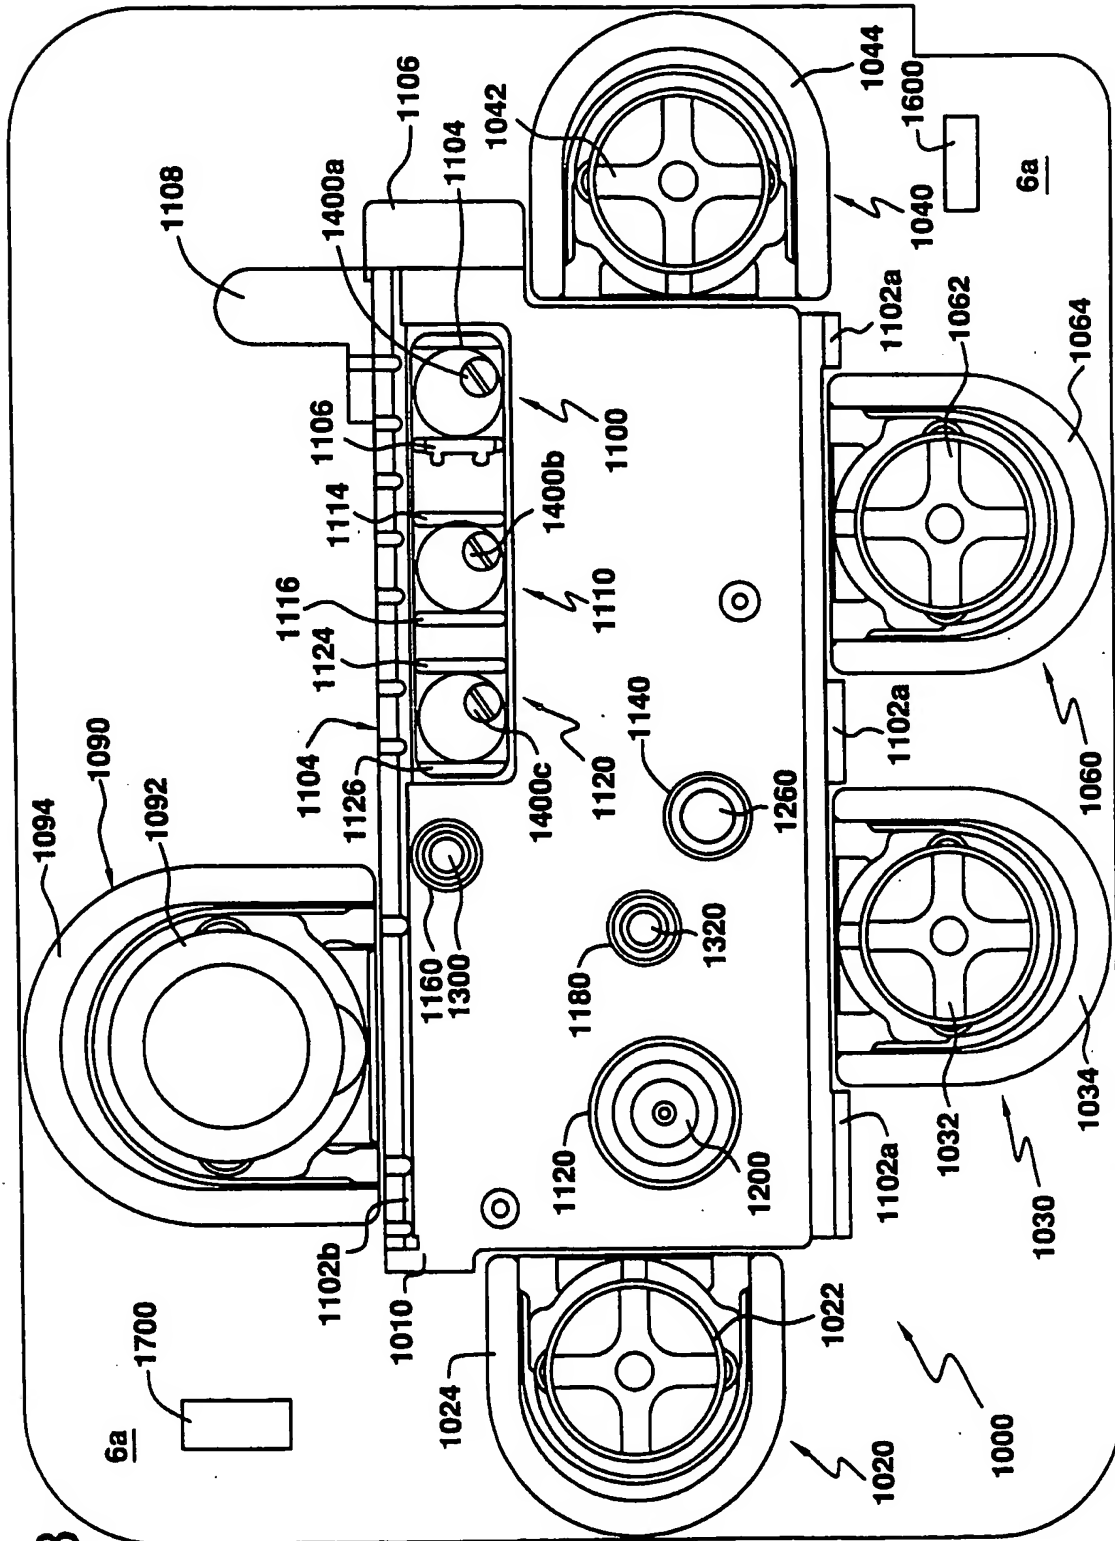
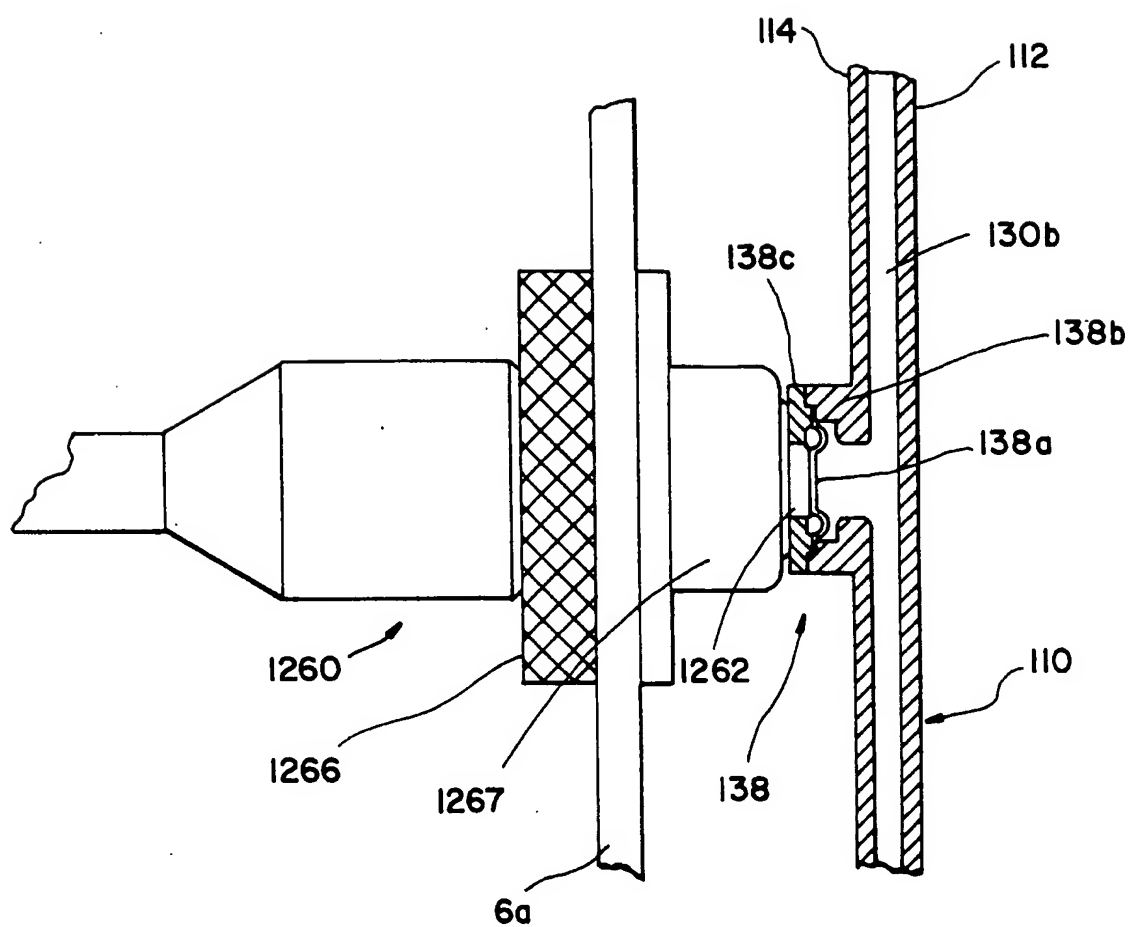


FIG. 3

•



FIG. 4B



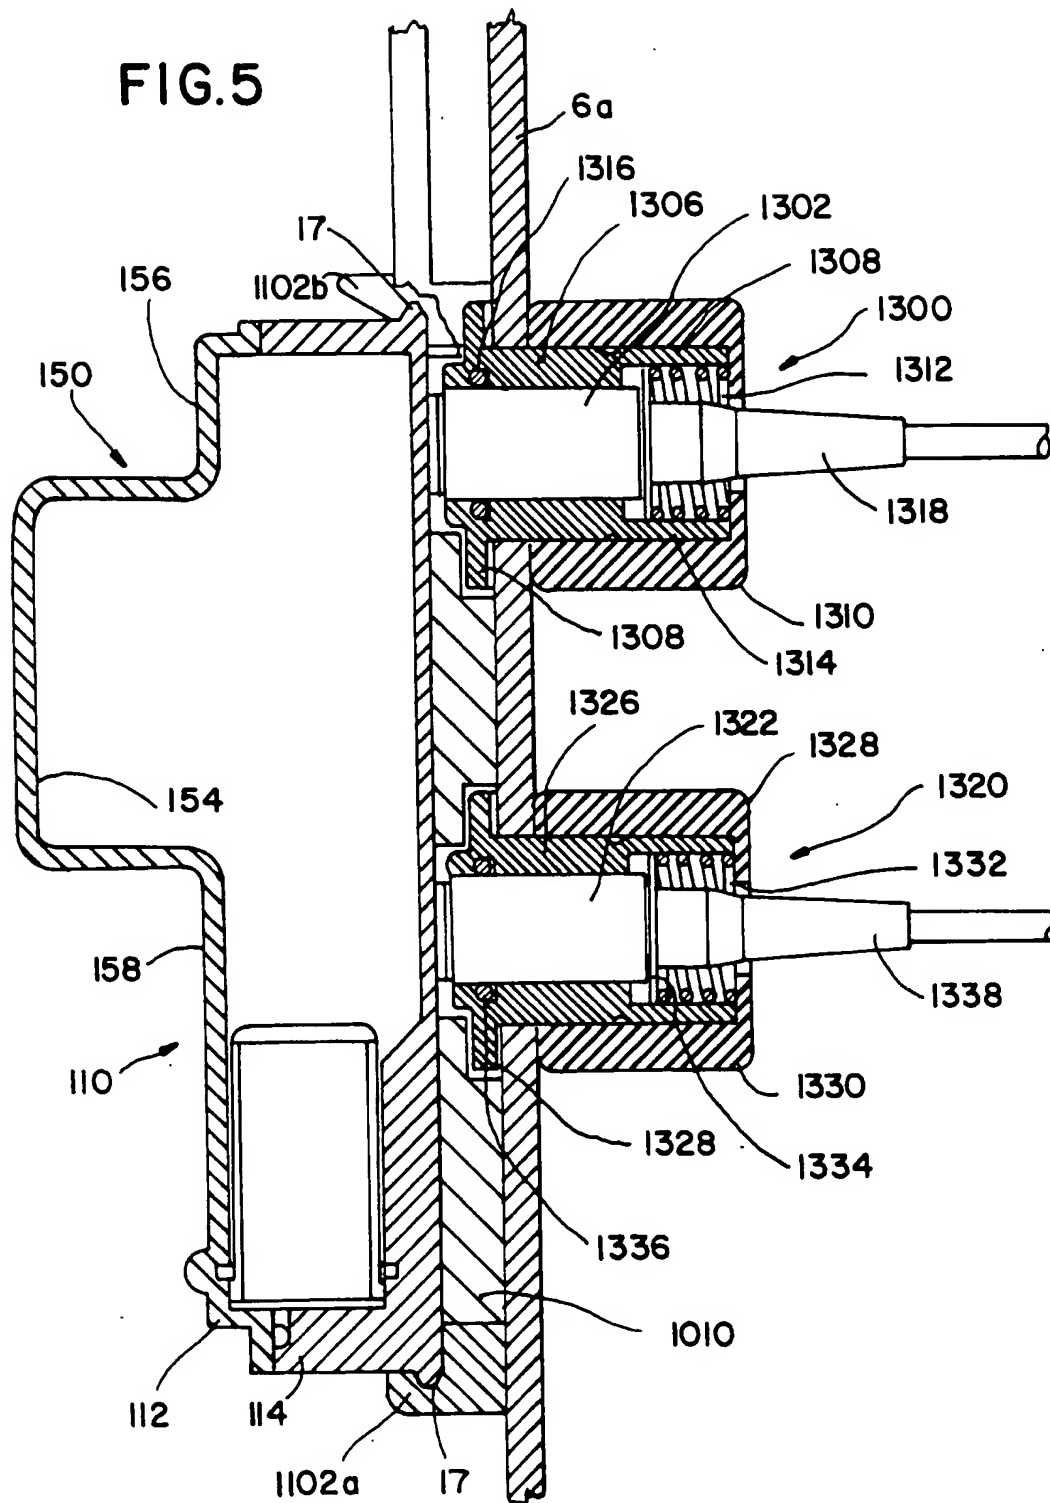
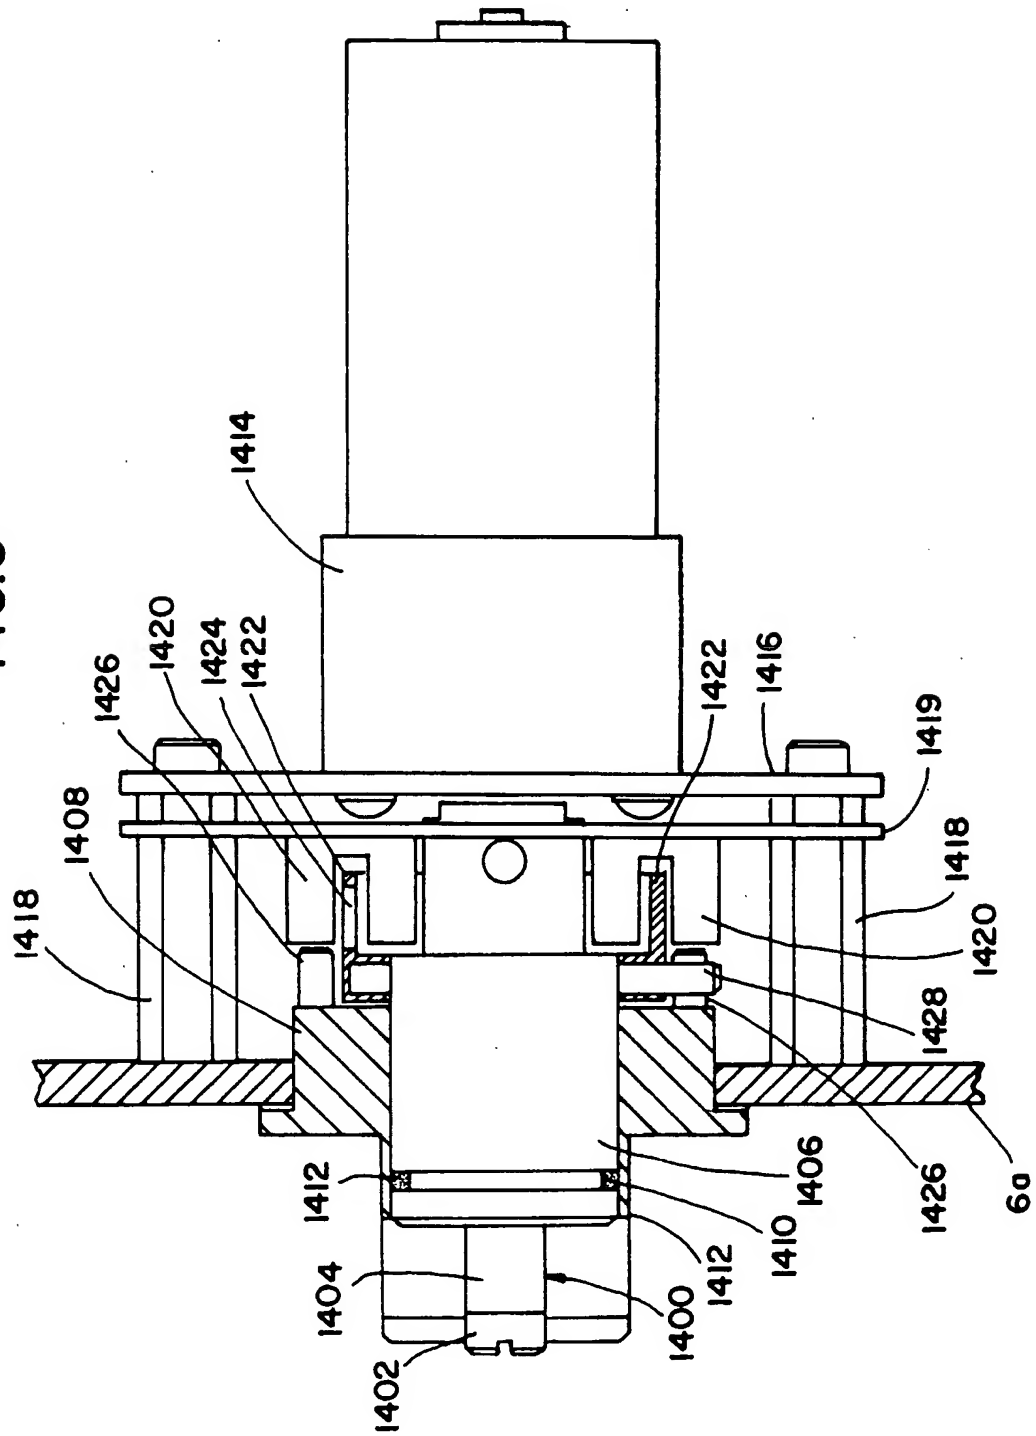


FIG. 6



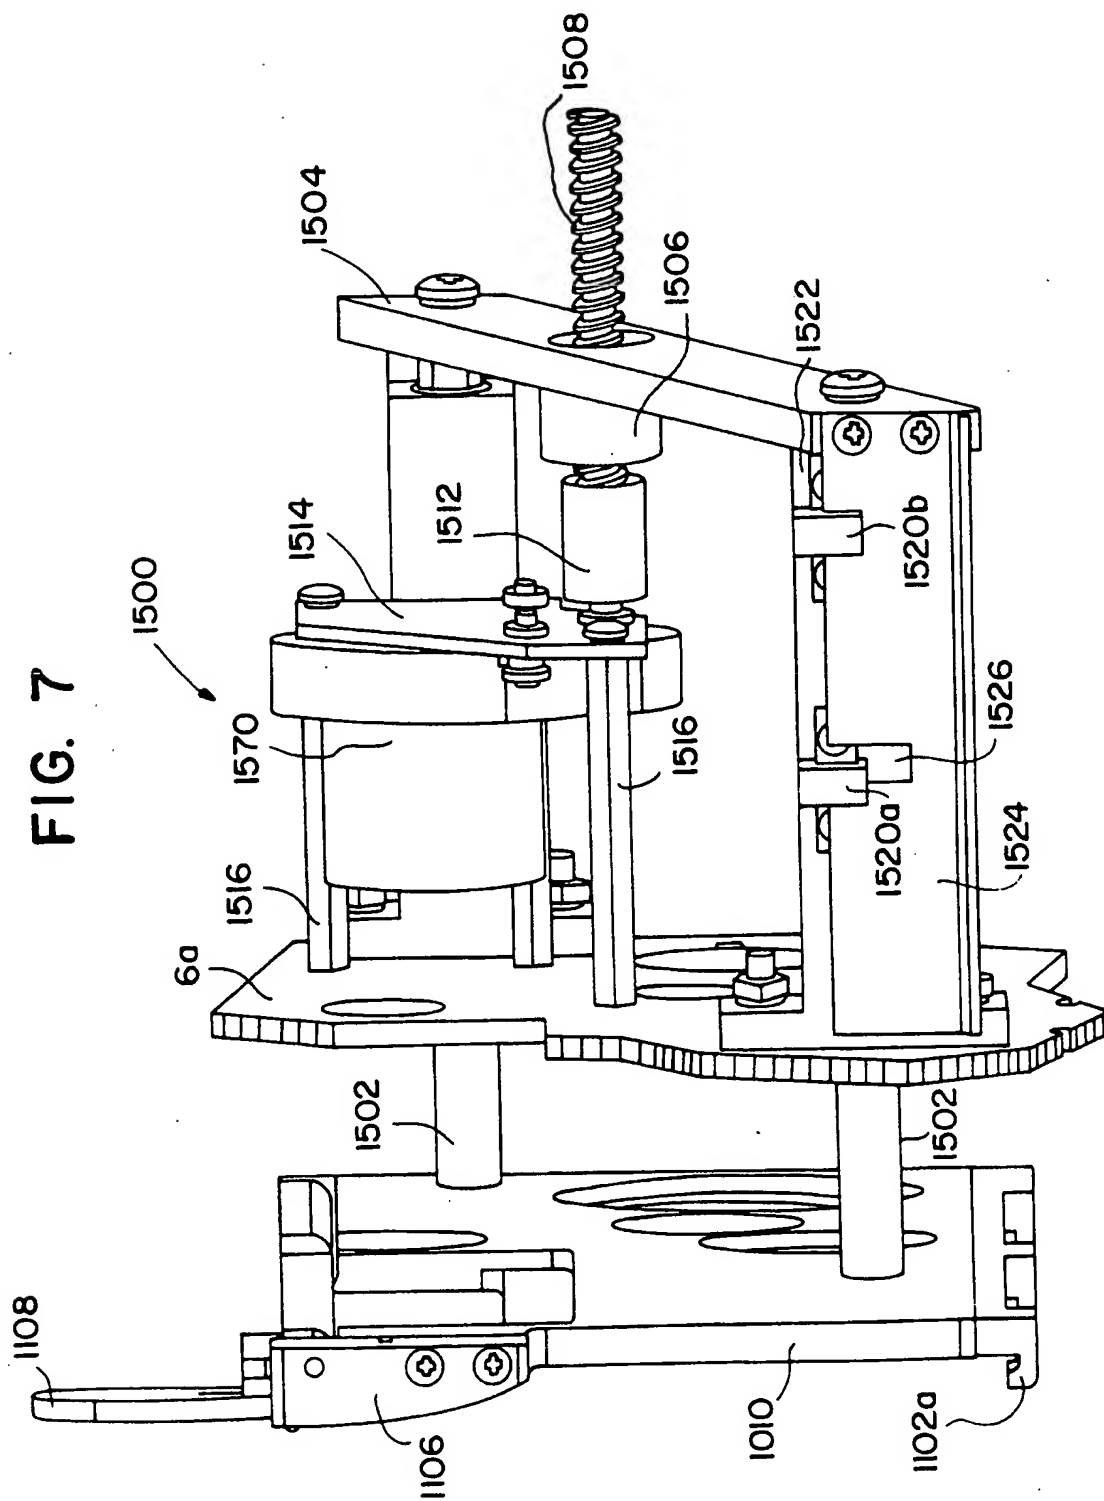




FIG. 8

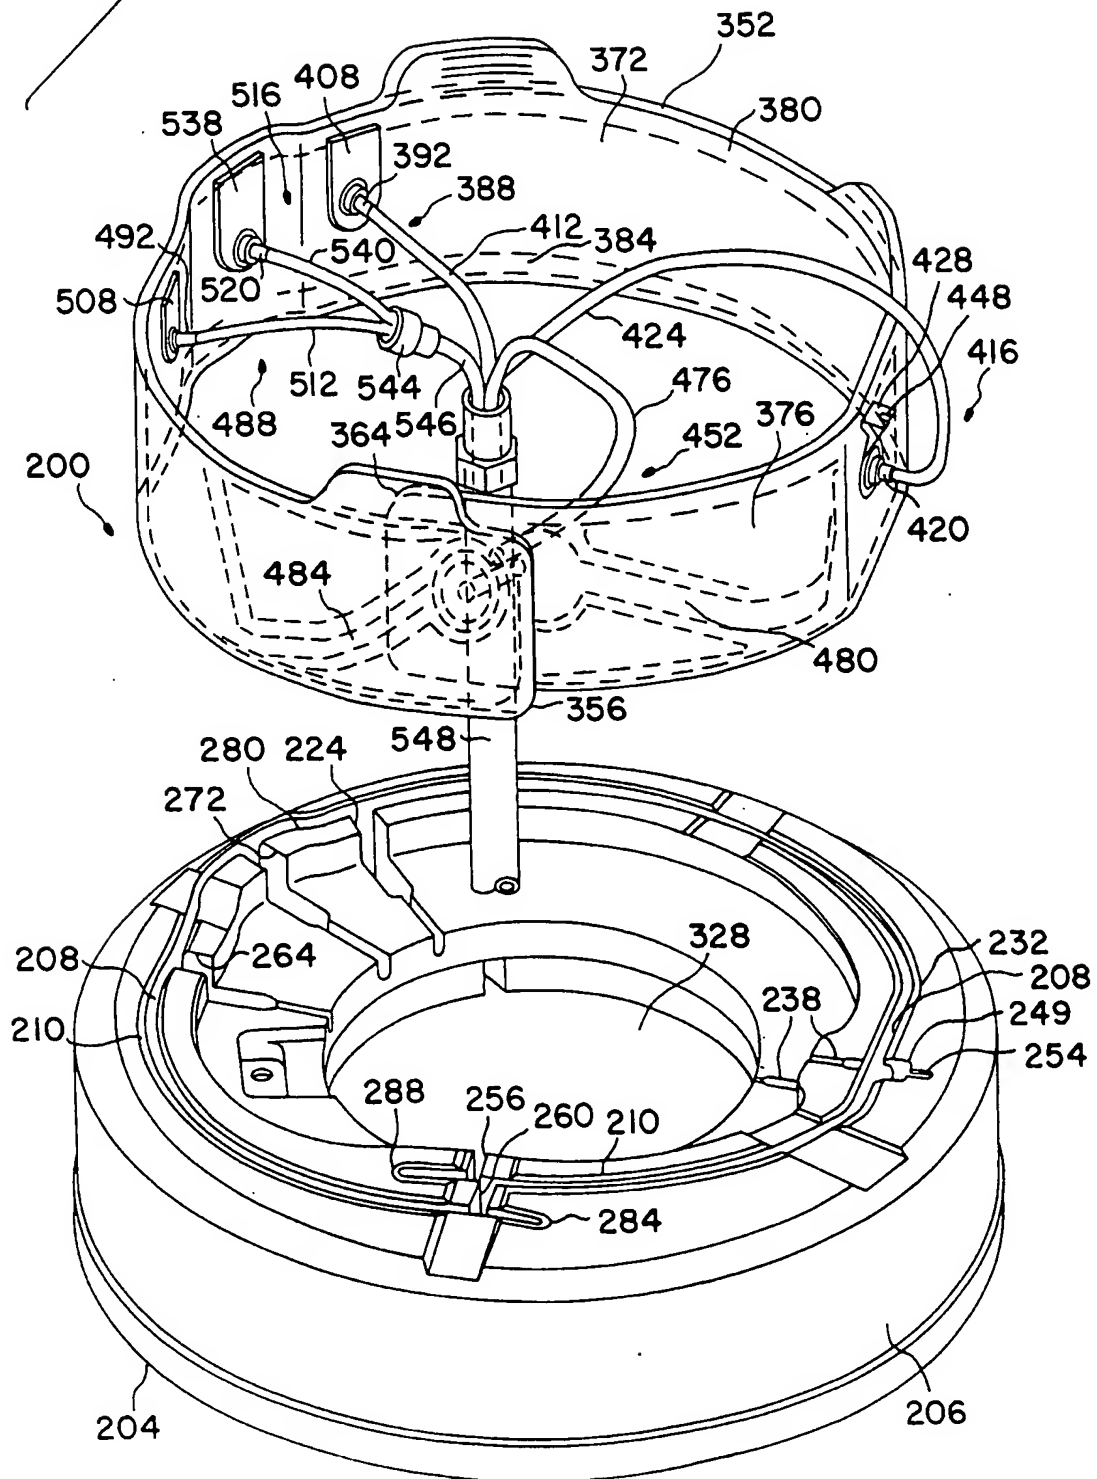


FIG. 9

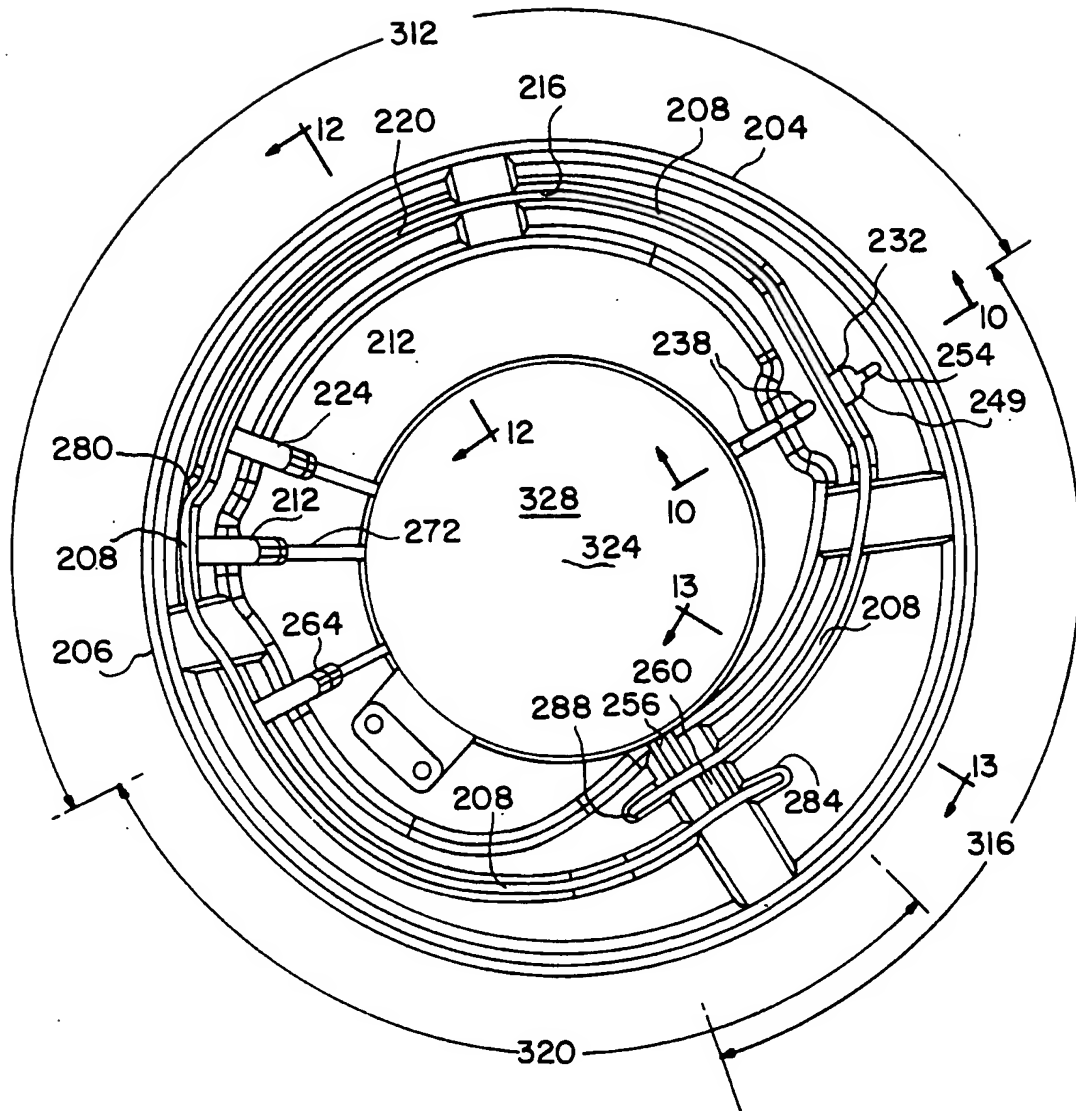


FIG. 9B

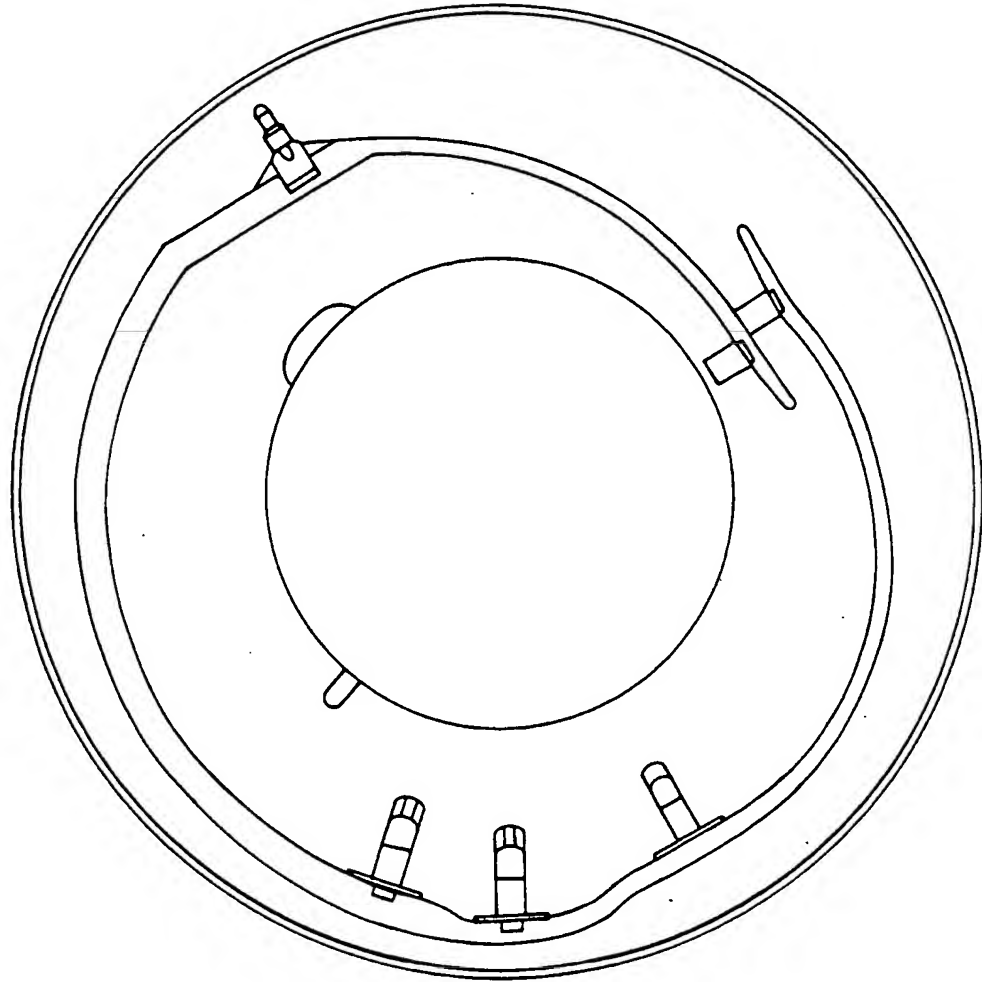


FIG. 10

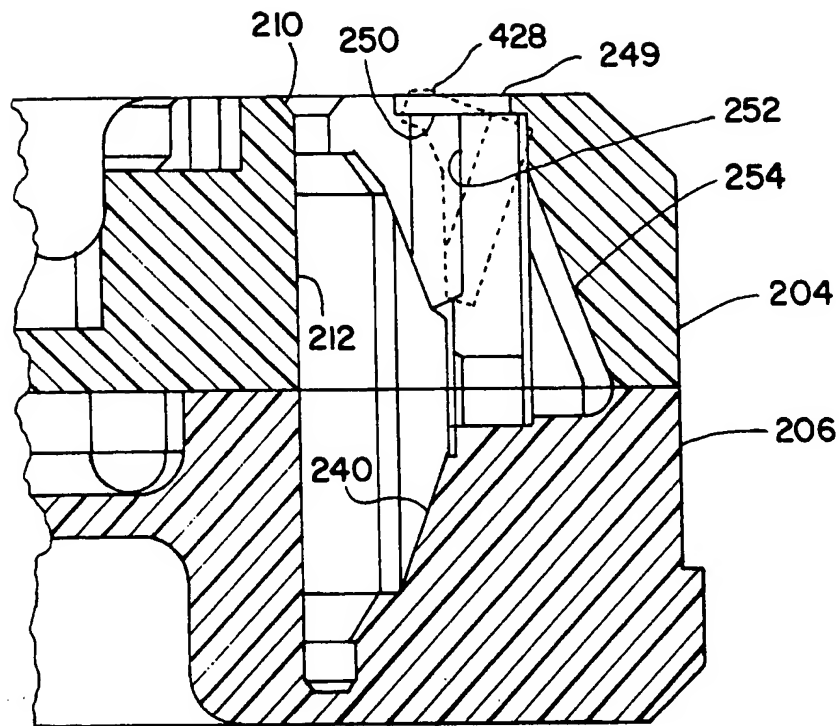


FIG. 11A

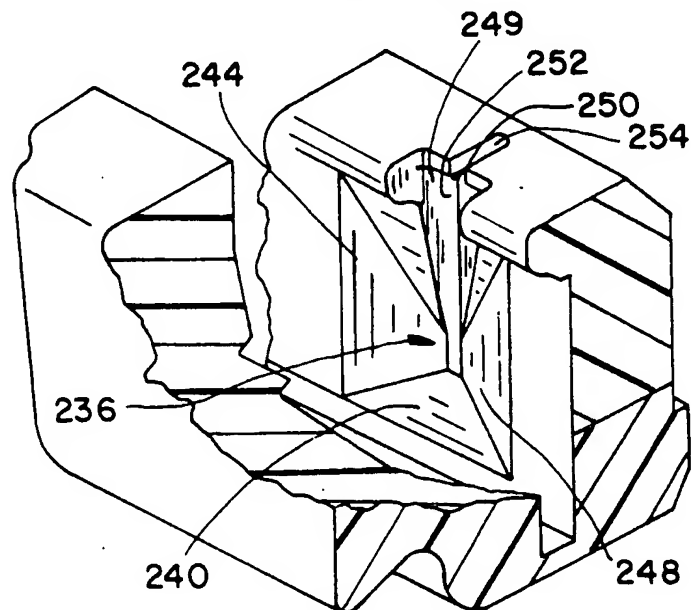


FIG. IIB

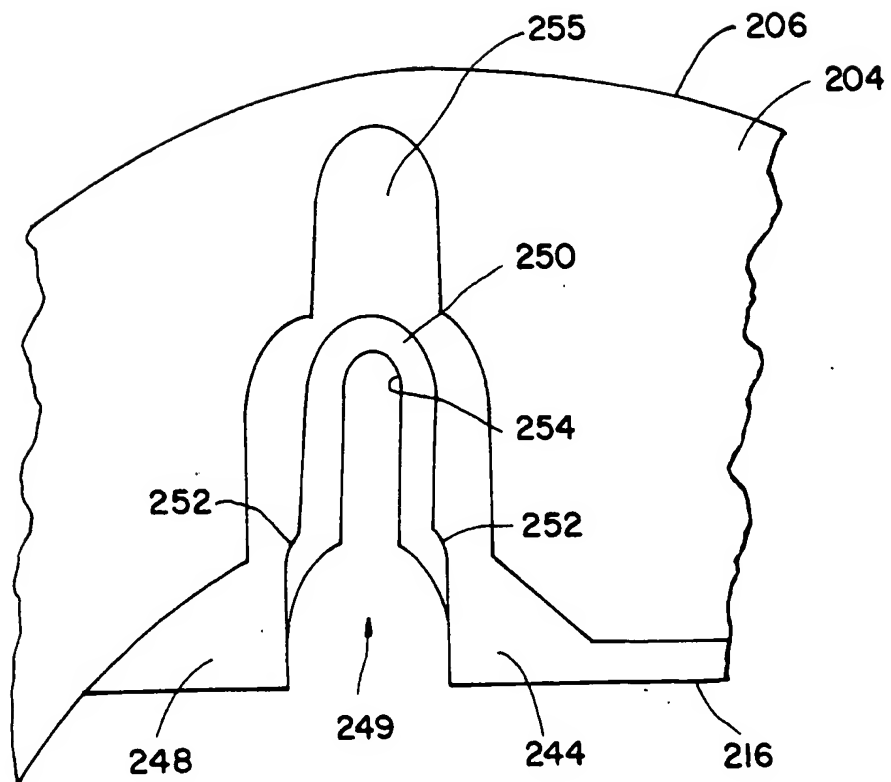


FIG. 12

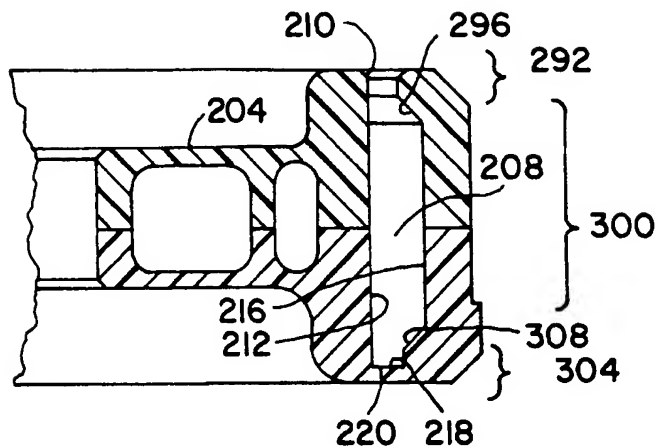


FIG. 13

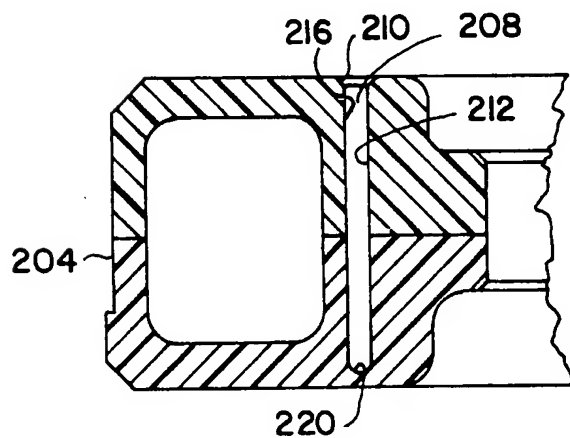


FIG. 14C

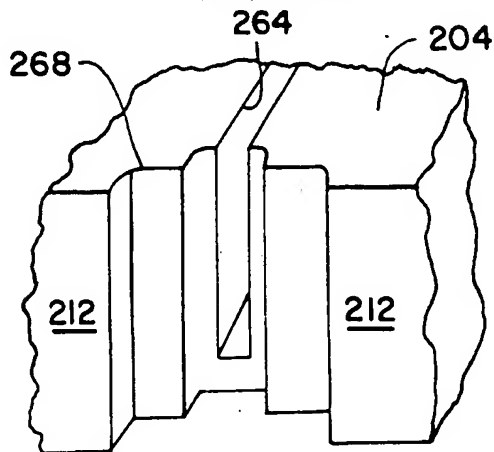


FIG. 14A

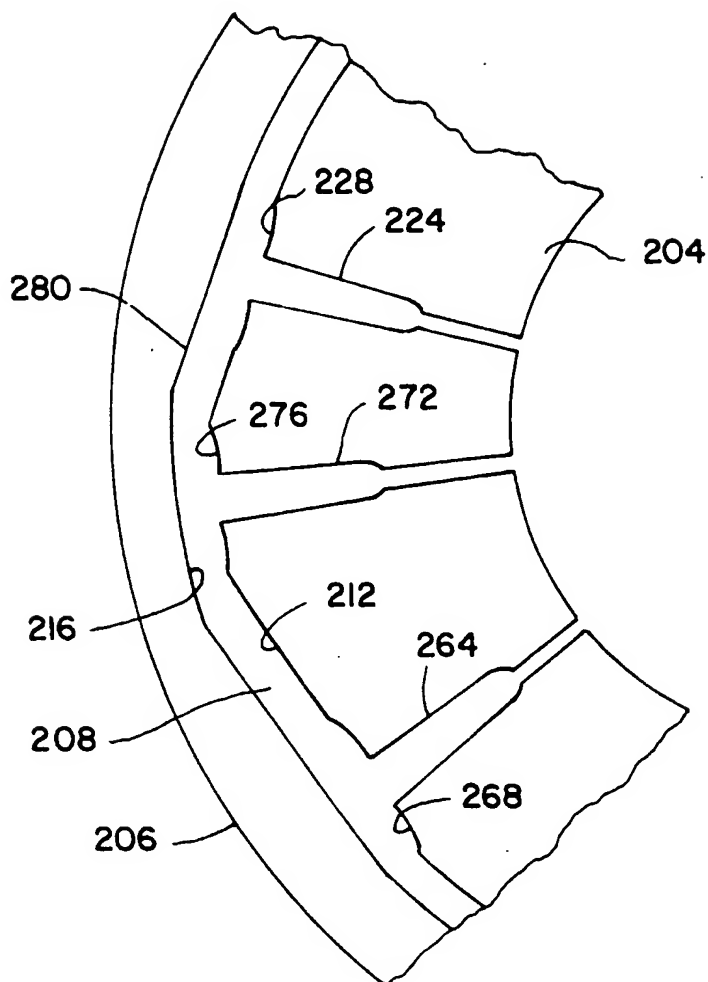


FIG. 14B

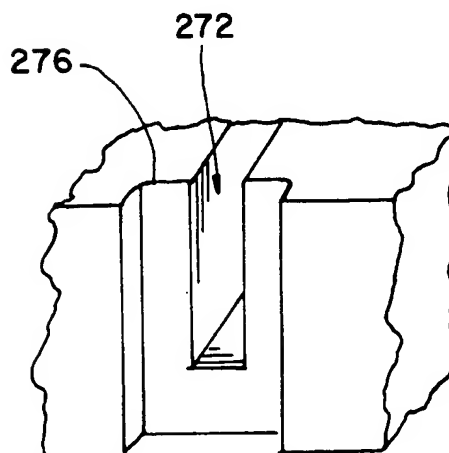
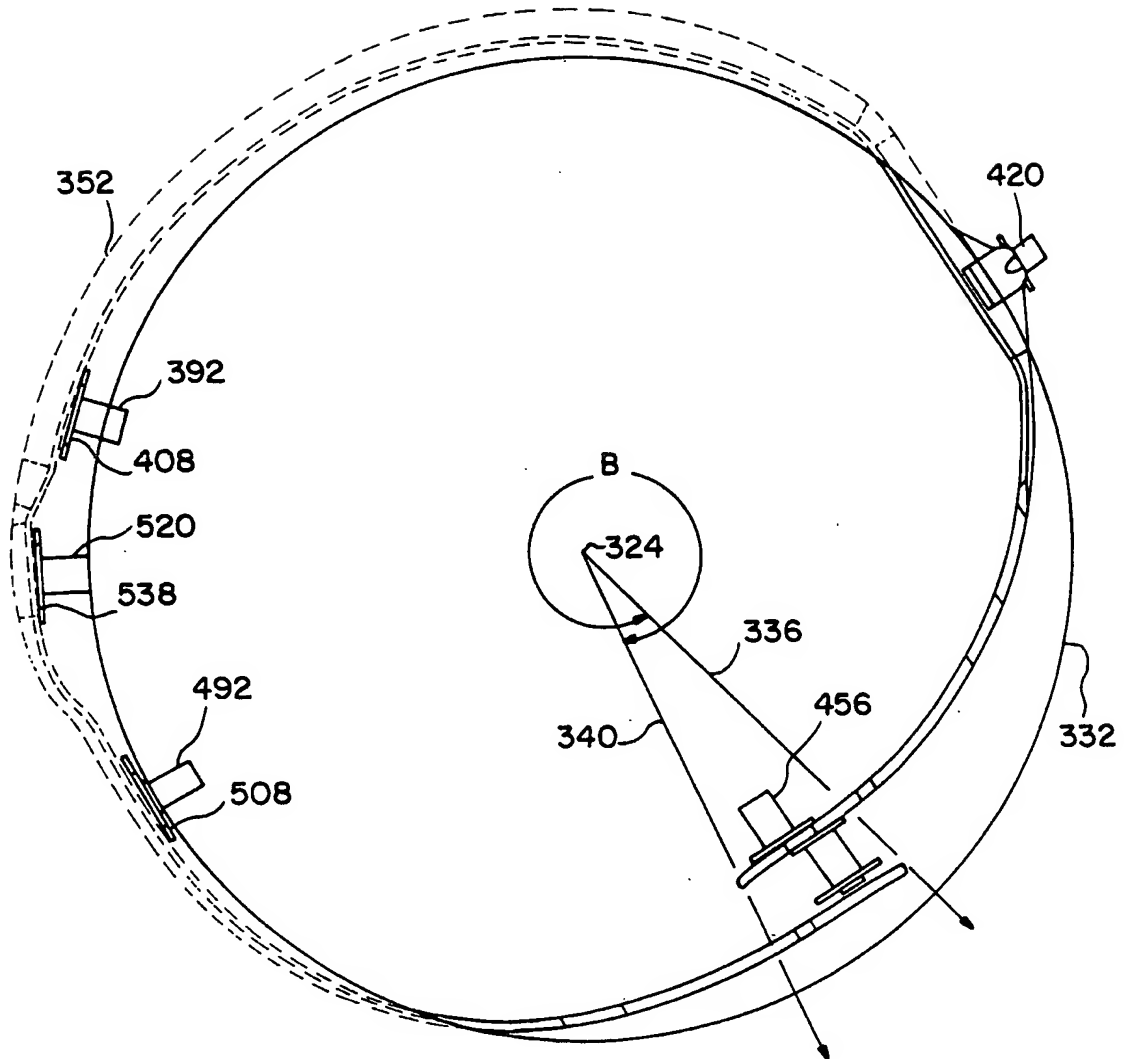


FIG. 15





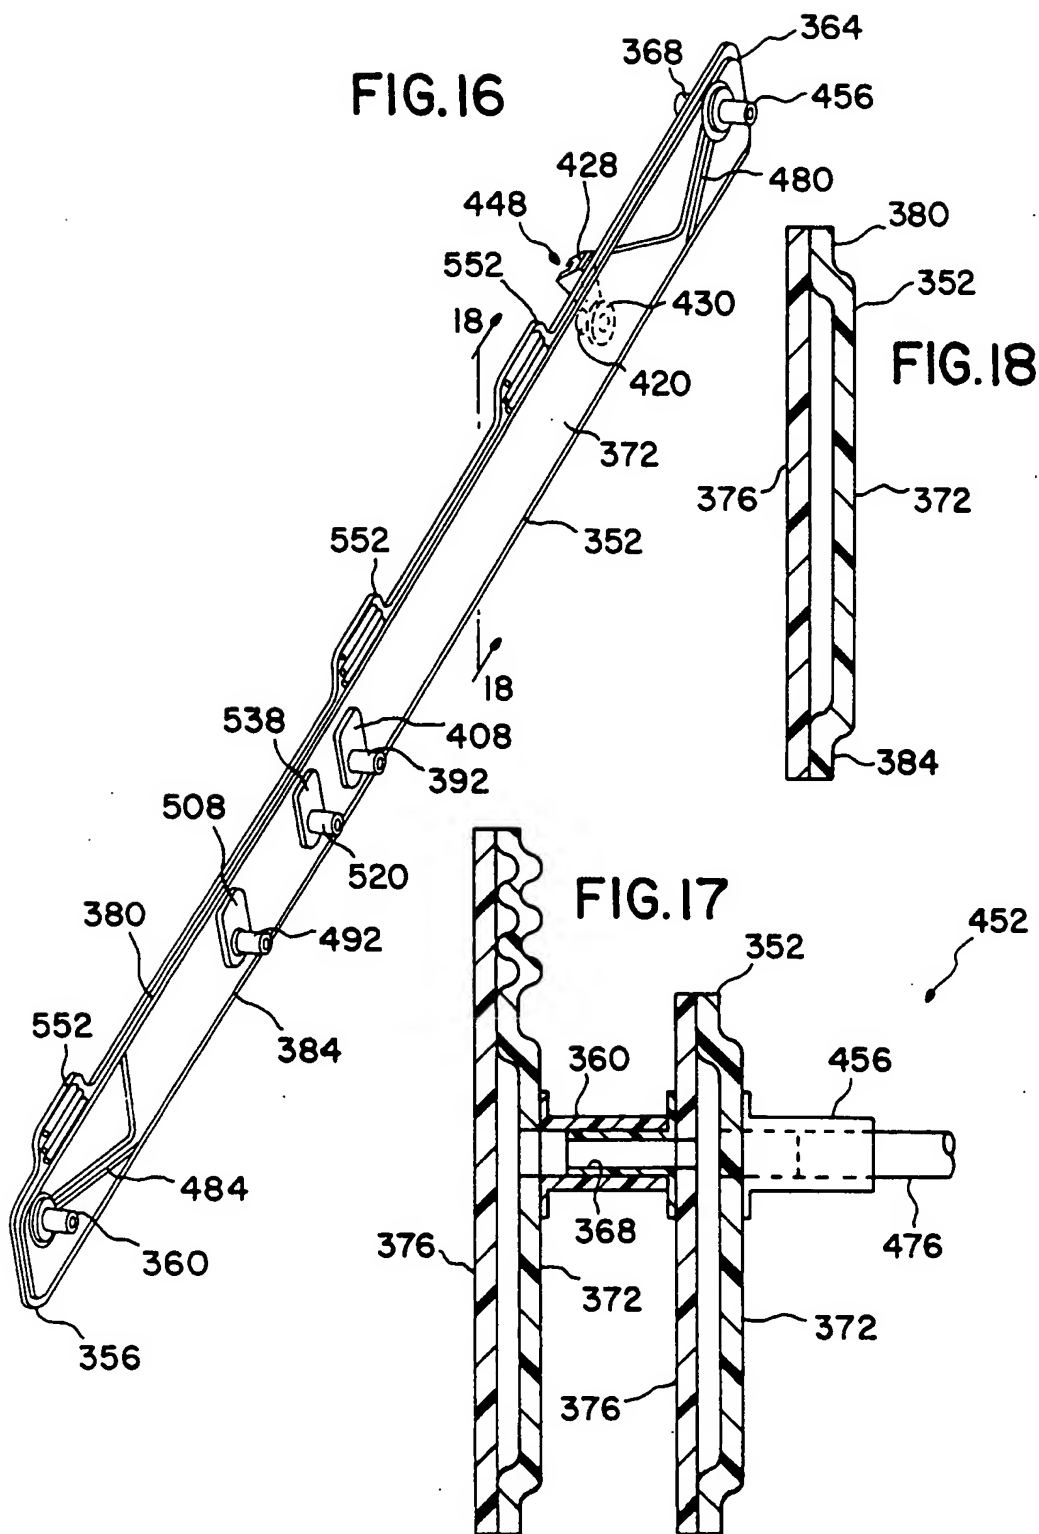


FIG. 19A

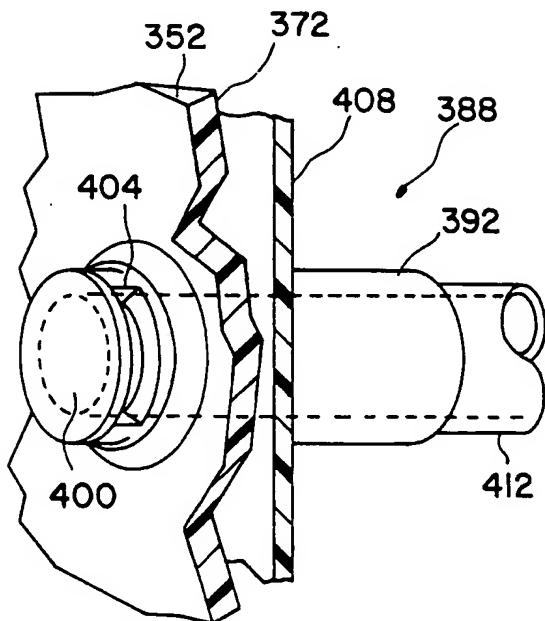


FIG. 19B

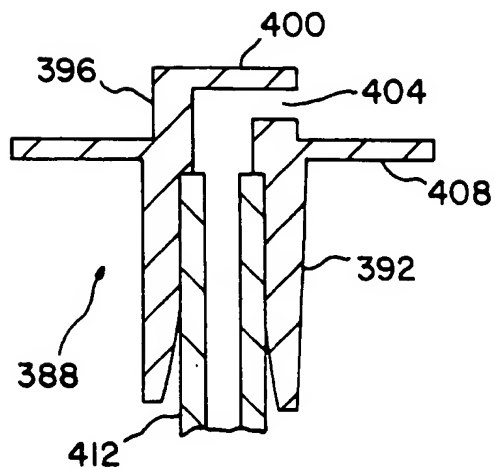


FIG. 19C

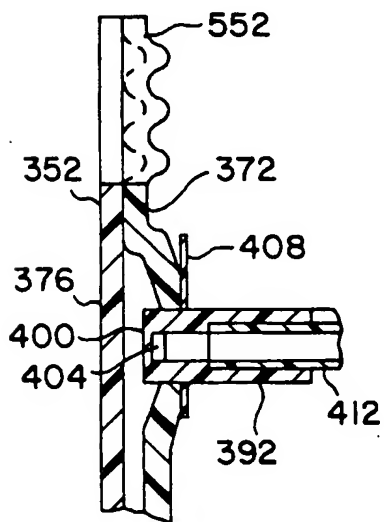


FIG. 19D

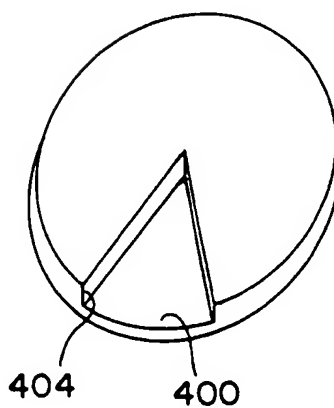


FIG. 19E

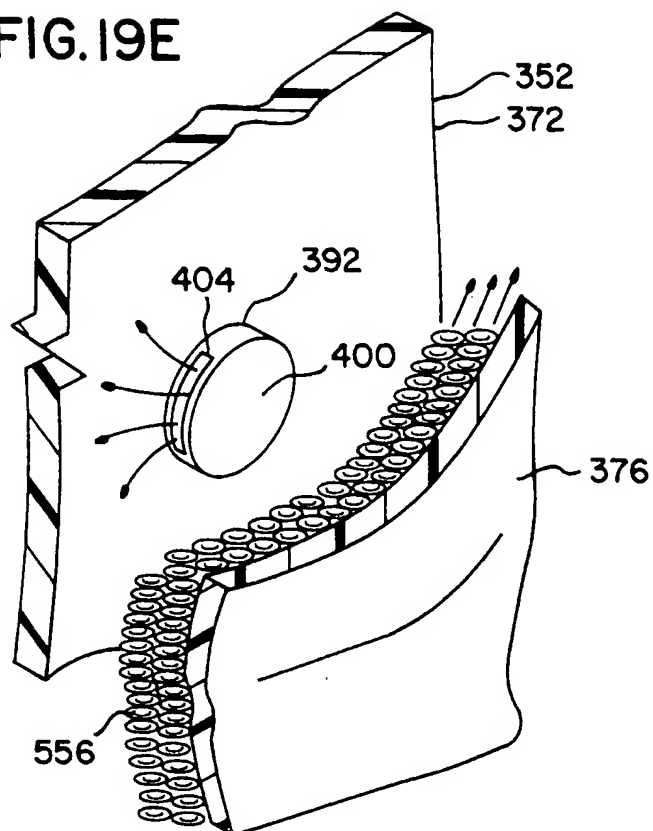
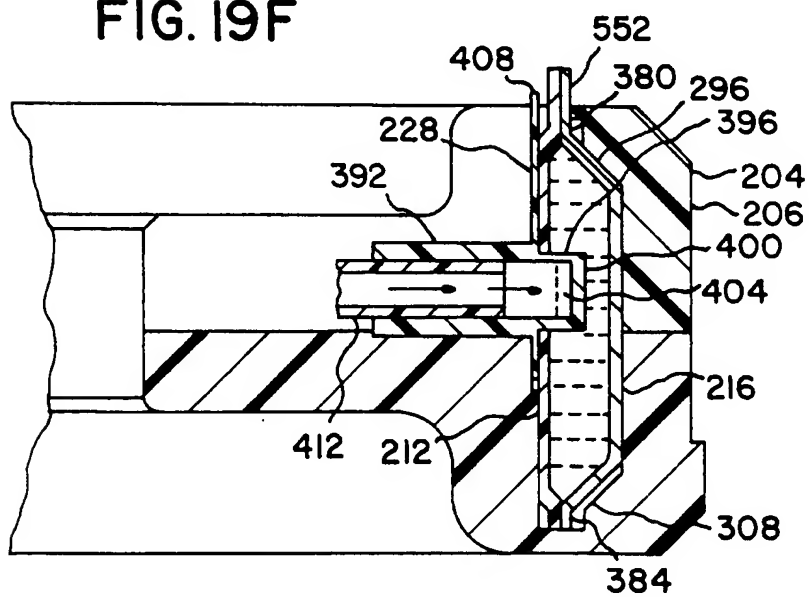


FIG. 19F



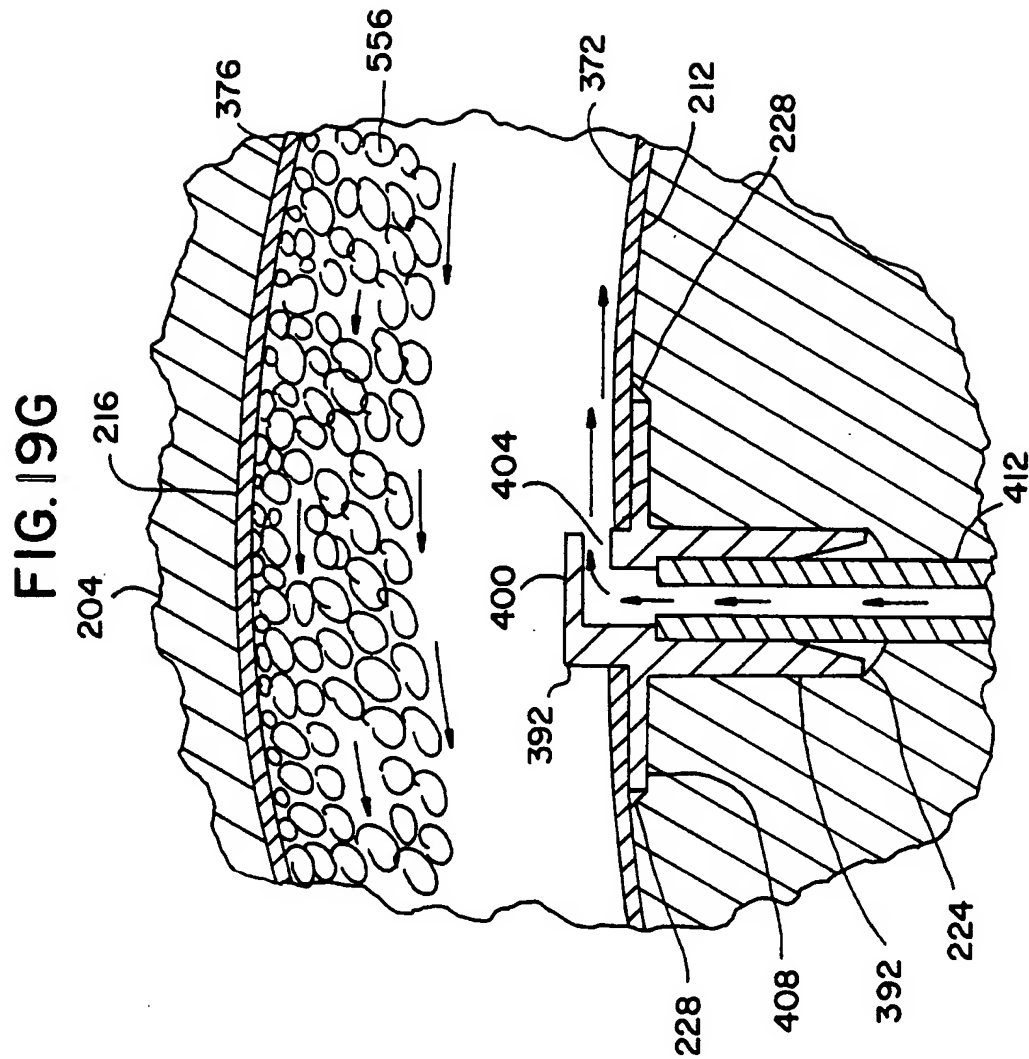


FIG.20A

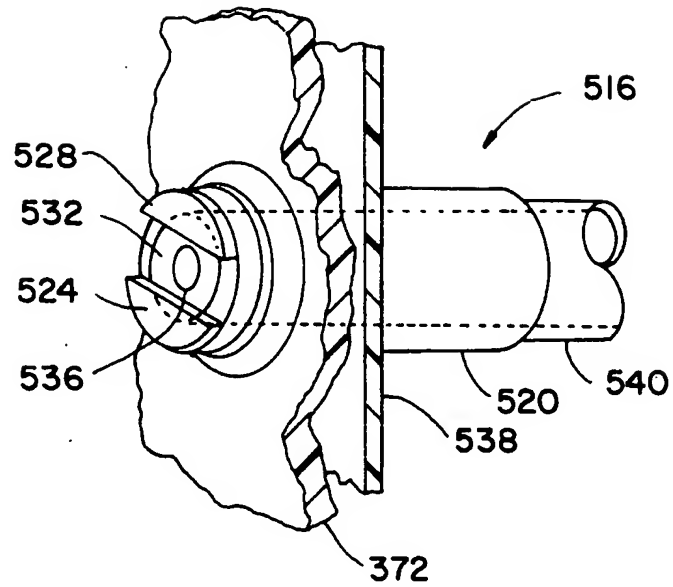


FIG.20B

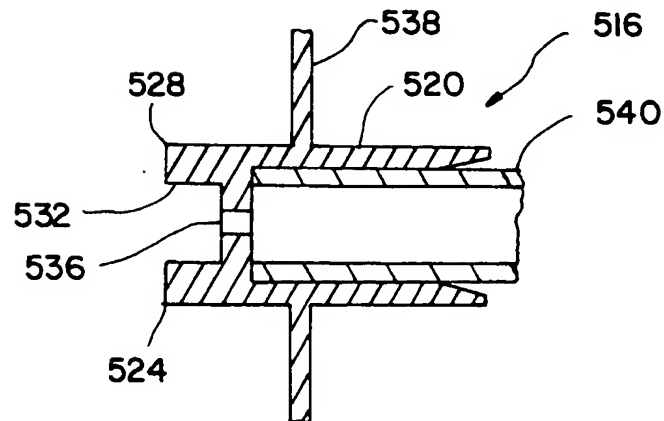


FIG. 20C

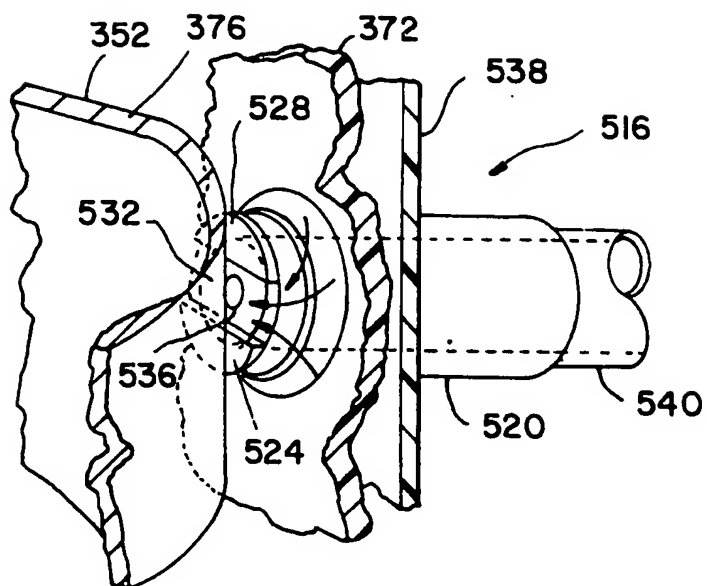


FIG. 20C

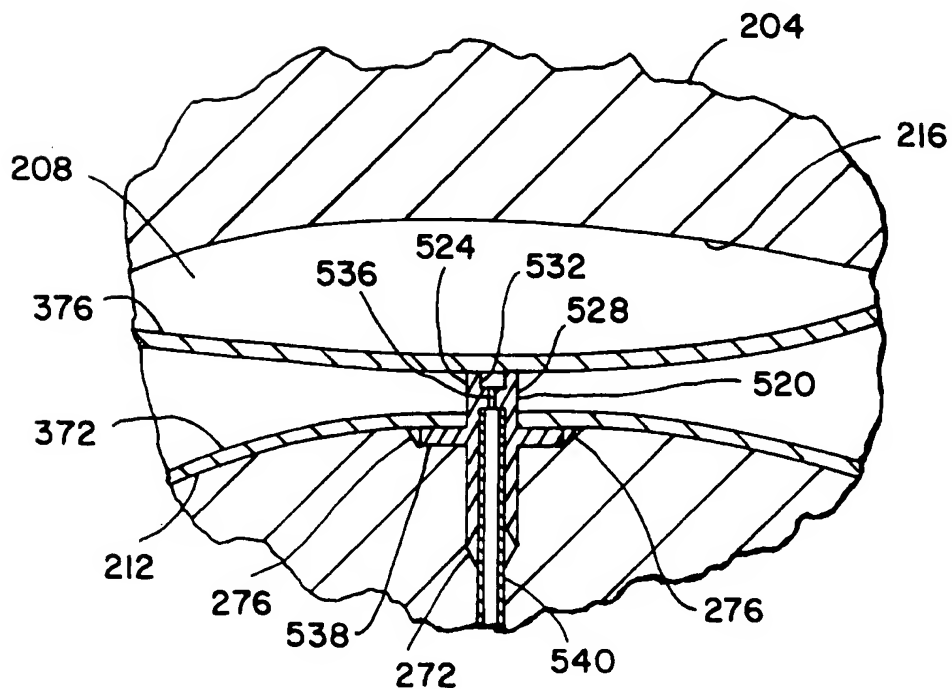


FIG. 21A

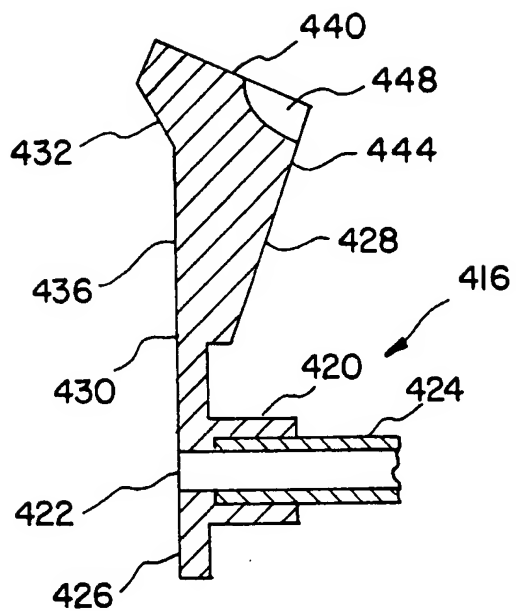


FIG. 21B

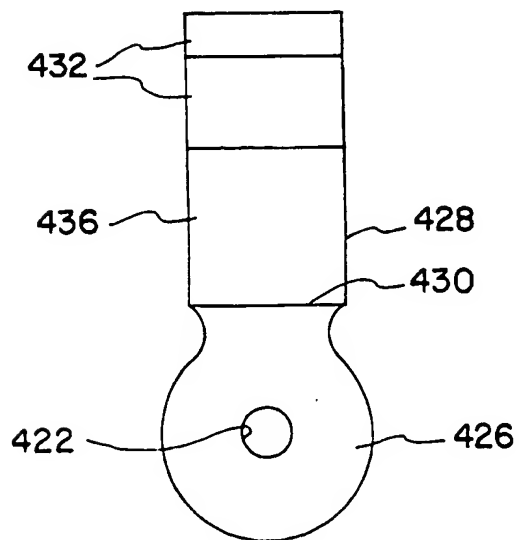


FIG.22

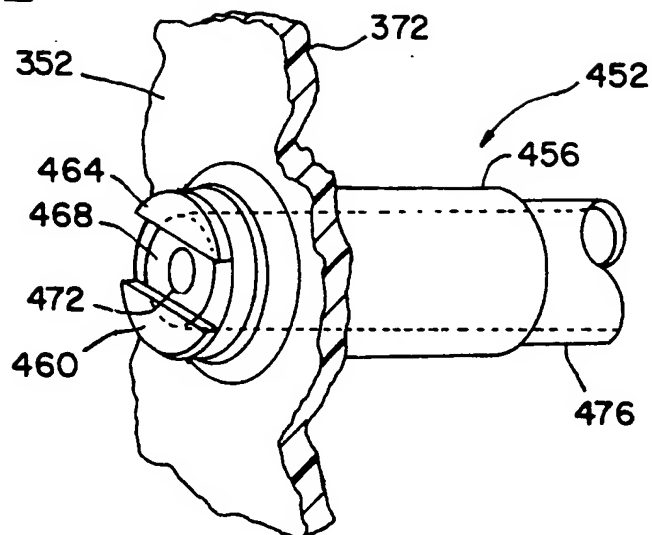


FIG.23A

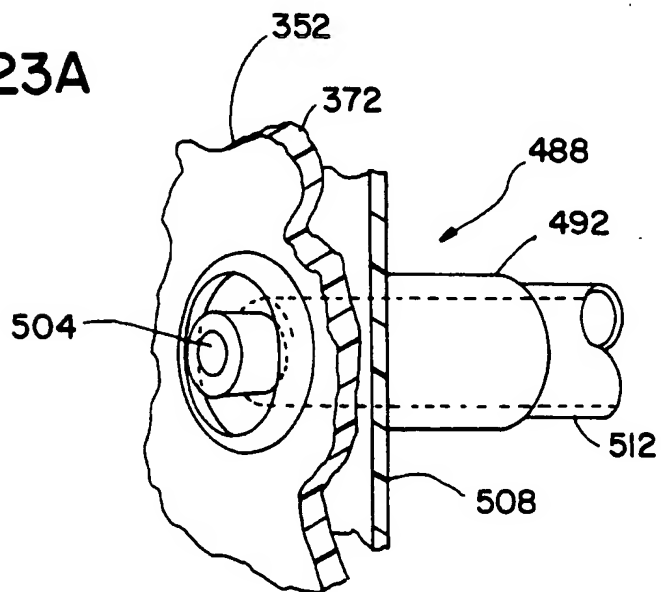


FIG.23B

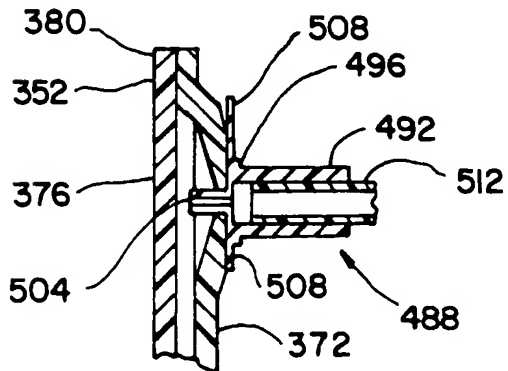




FIG. 24

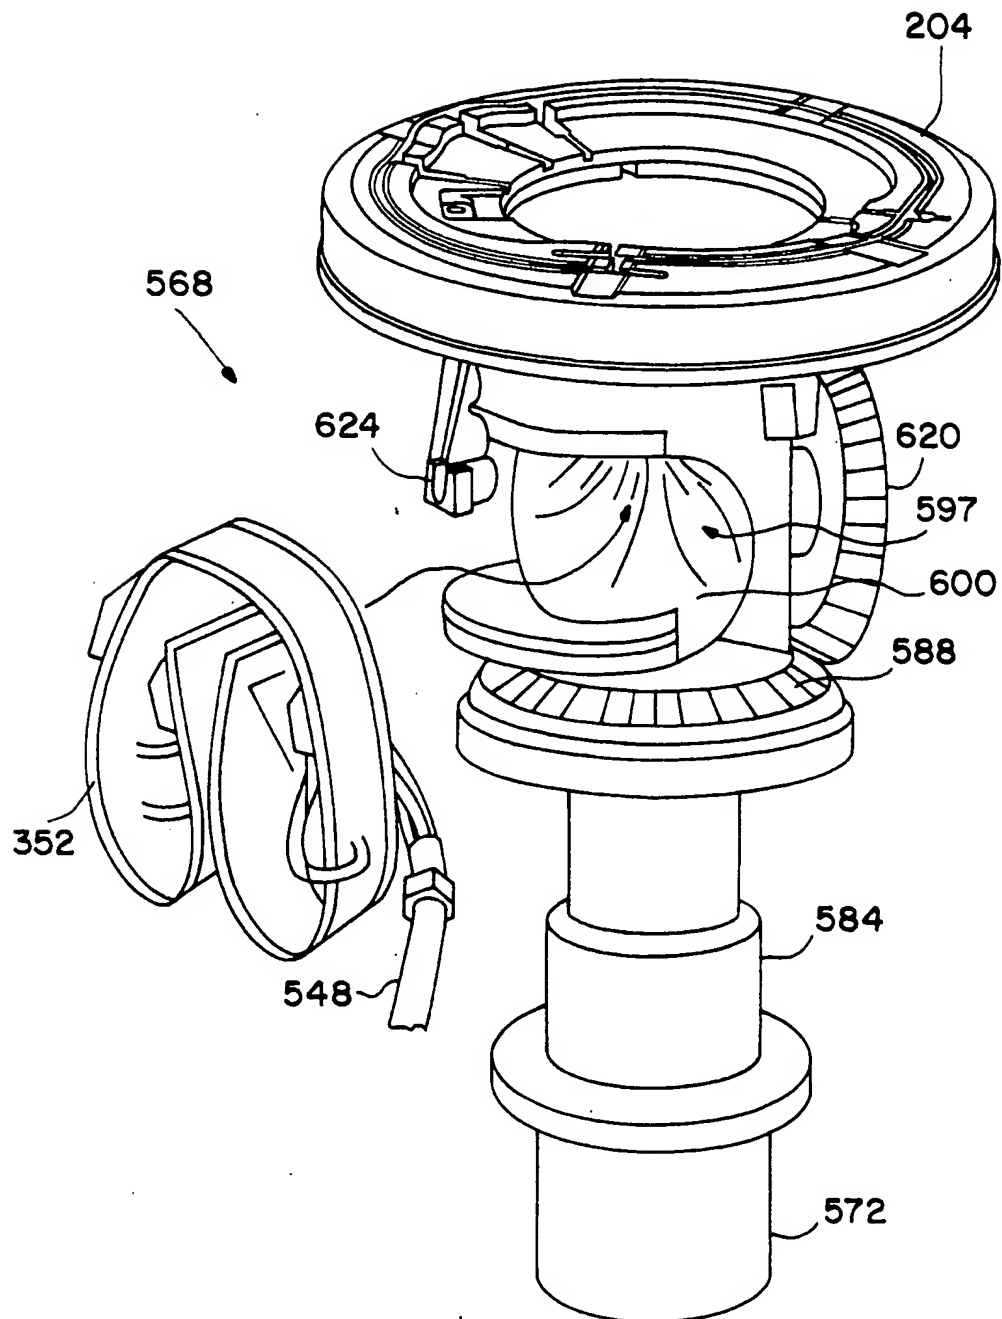


FIG. 25A

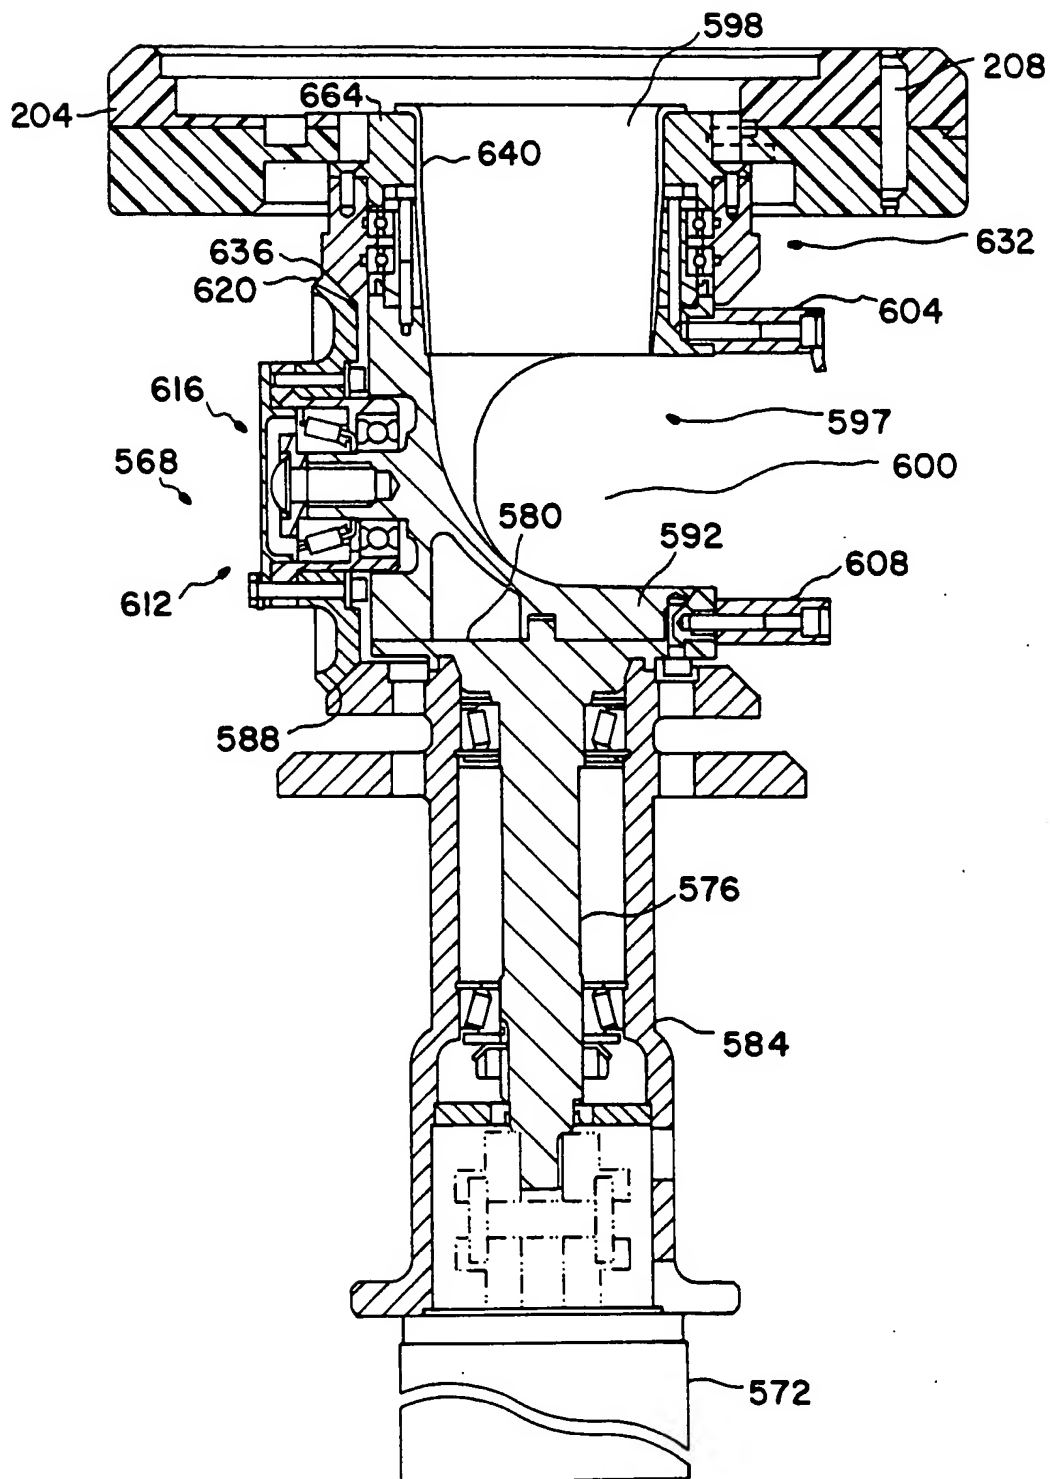


FIG. 25B

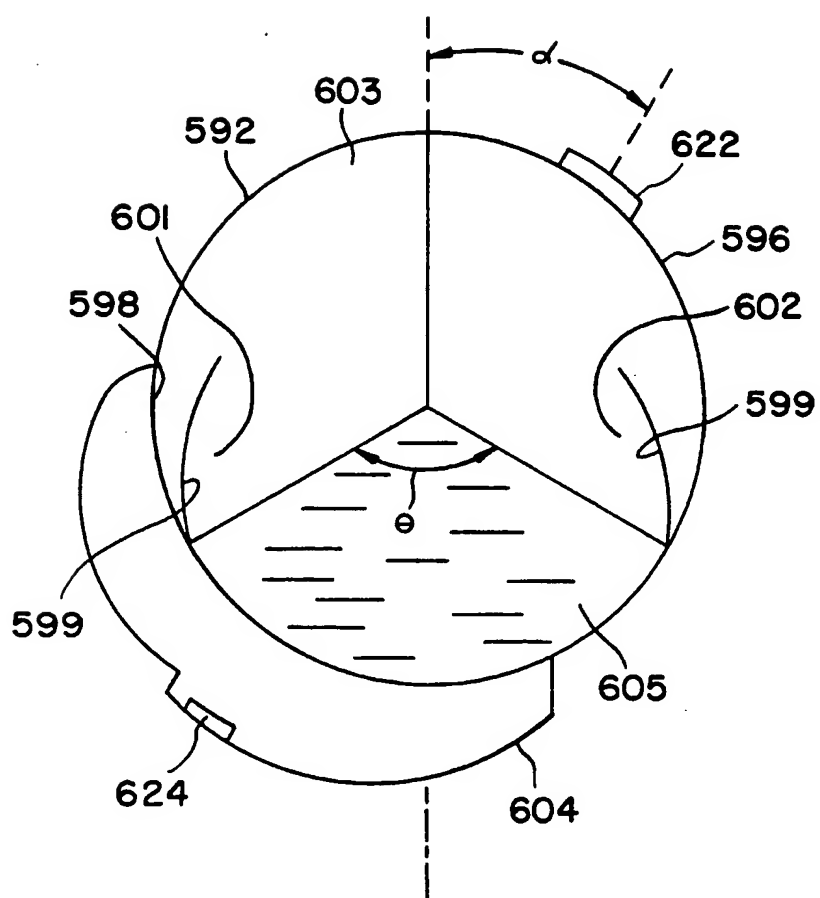


FIG. 25C

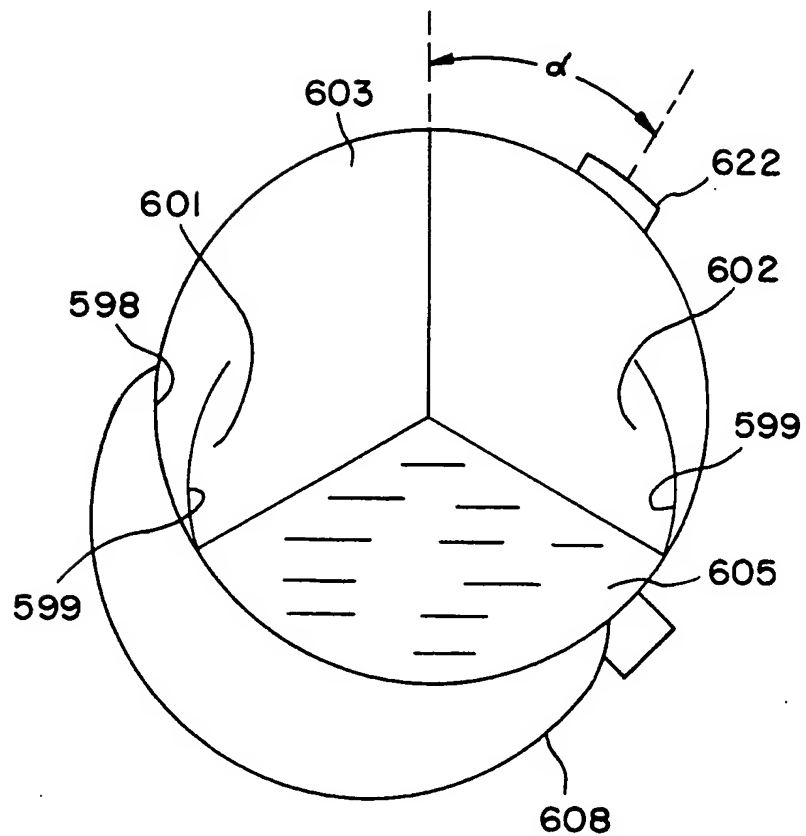


FIG. 25D

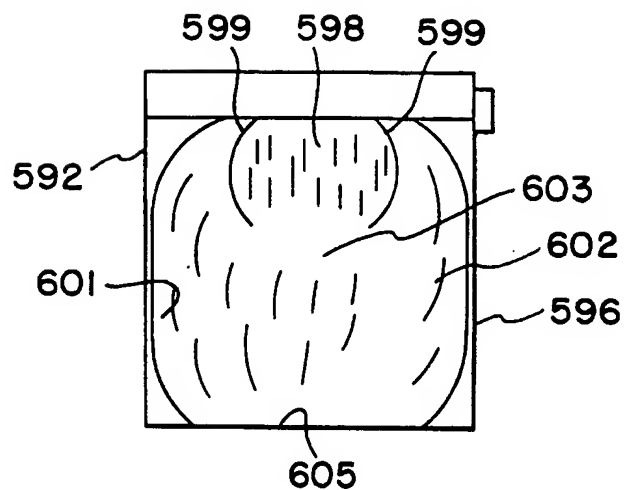


FIG. 25E

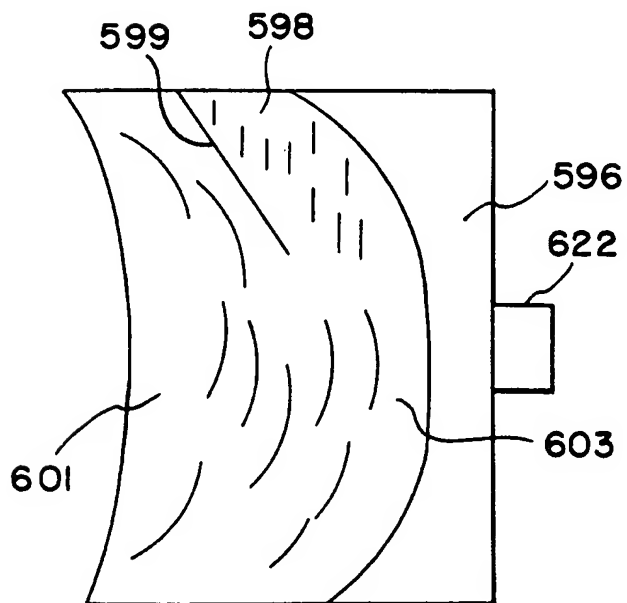


FIG. 25F

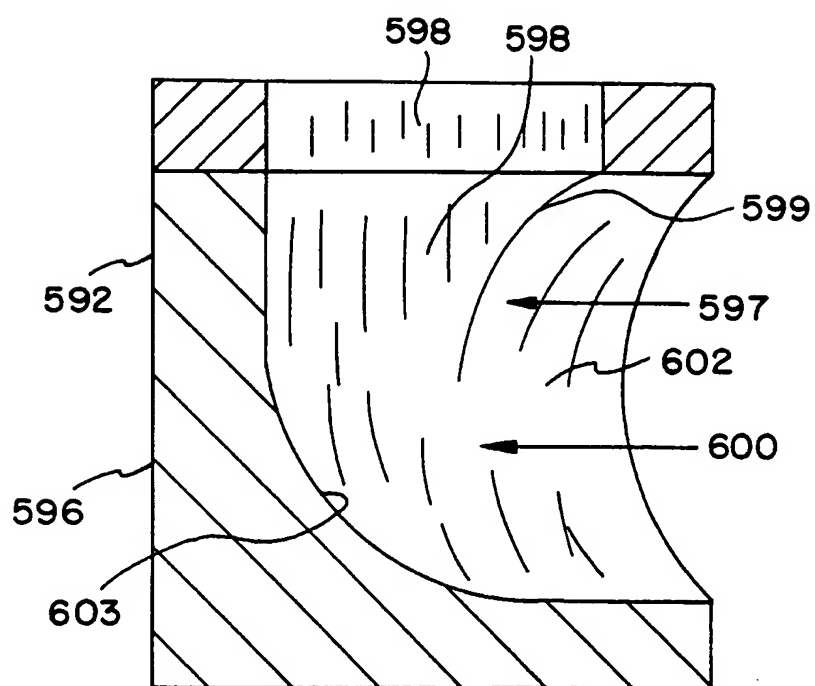


FIG. 26

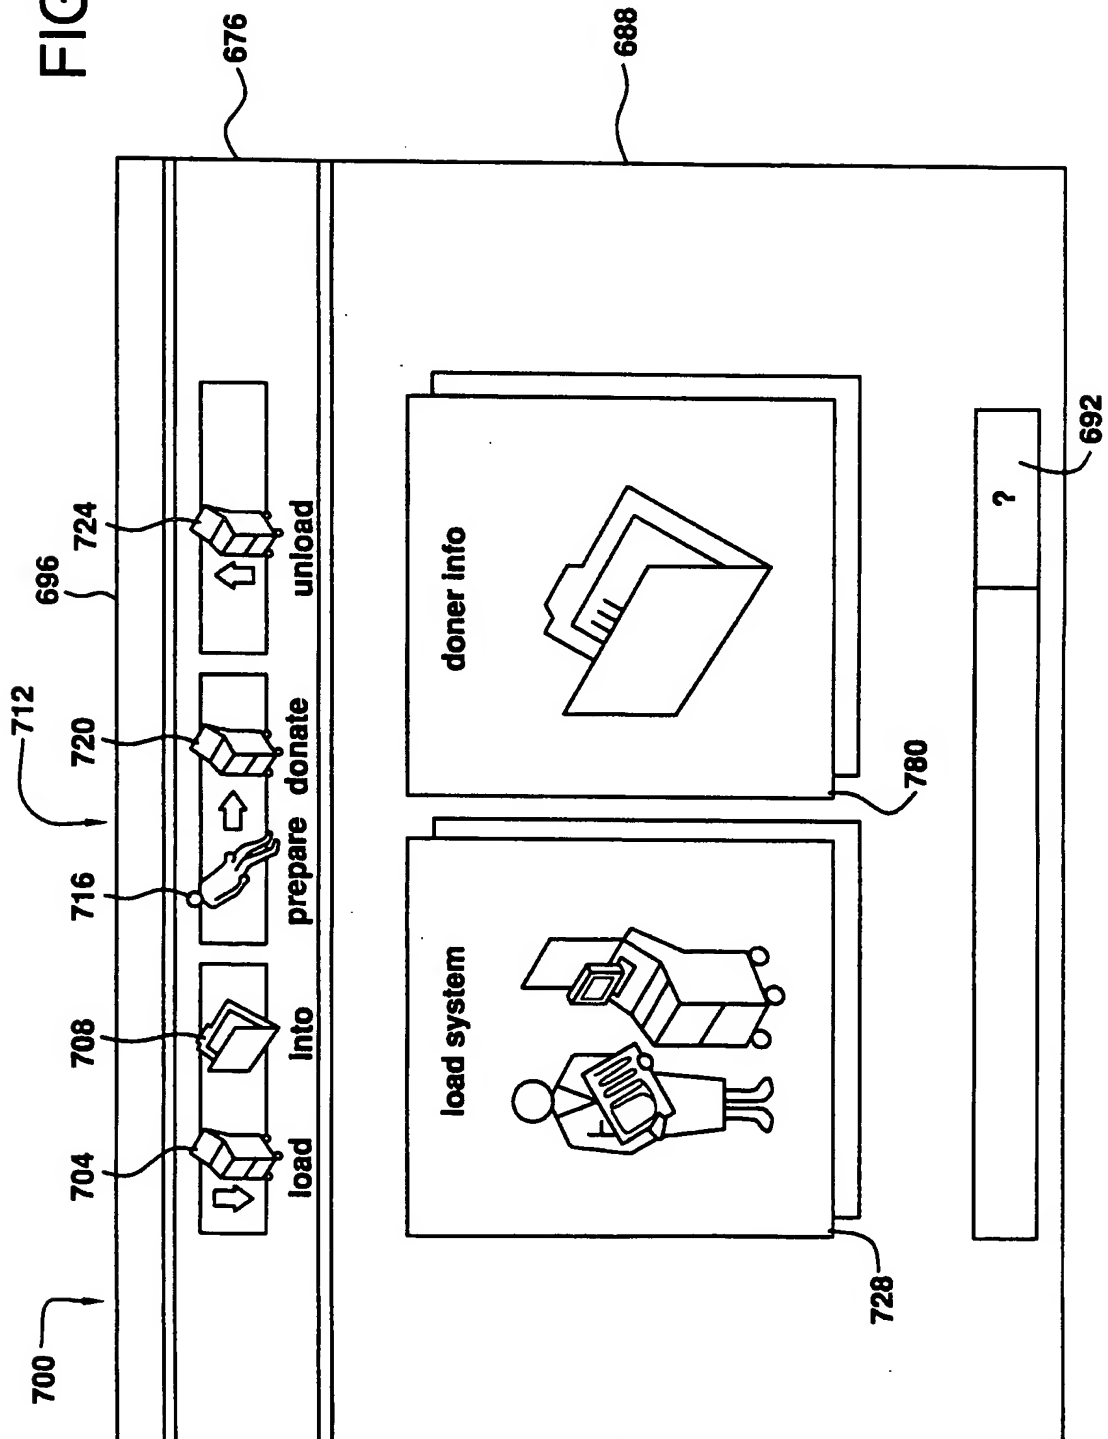


FIG.27

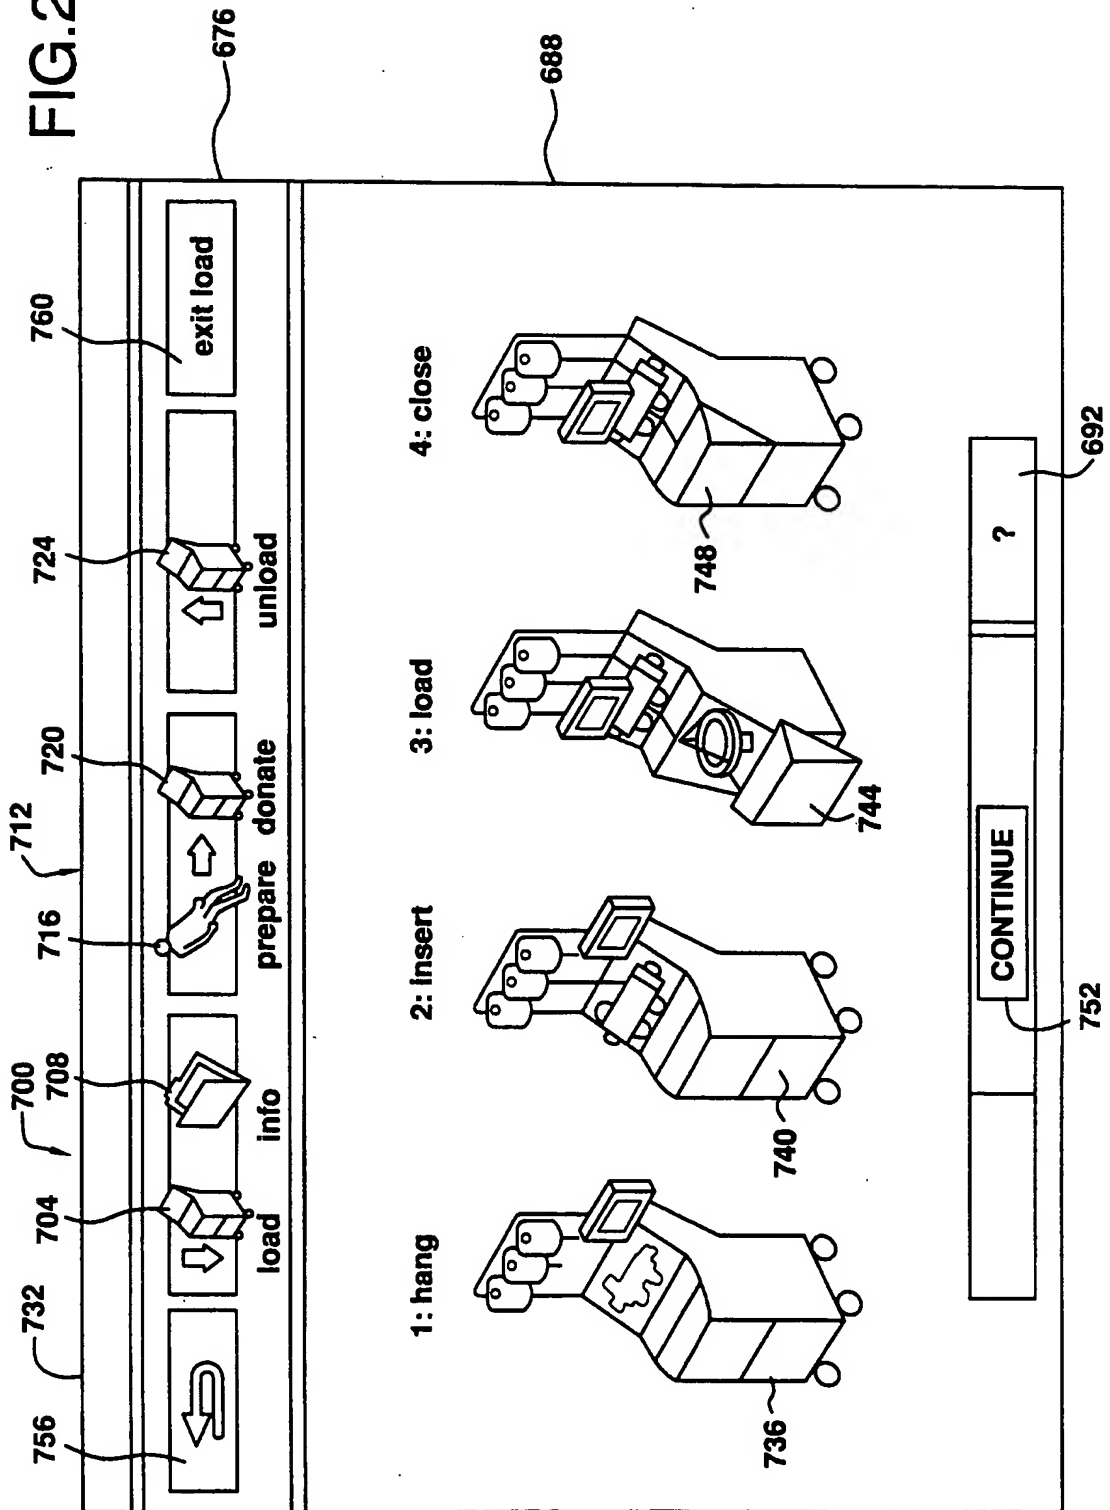
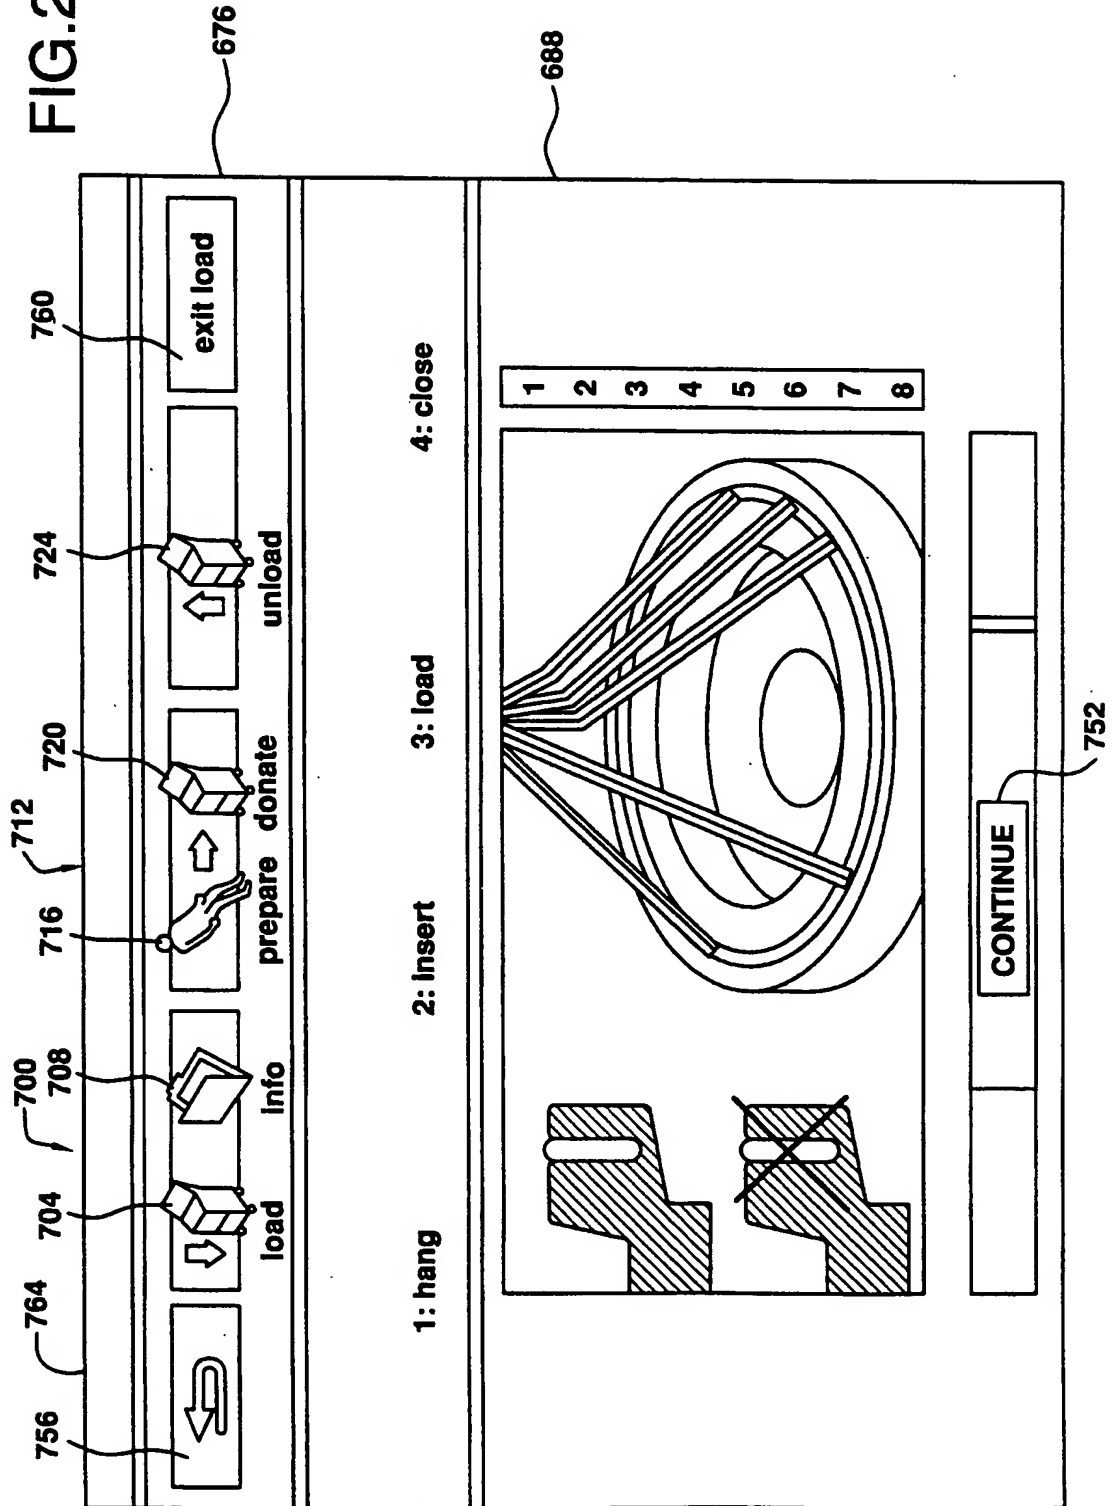




FIG.28



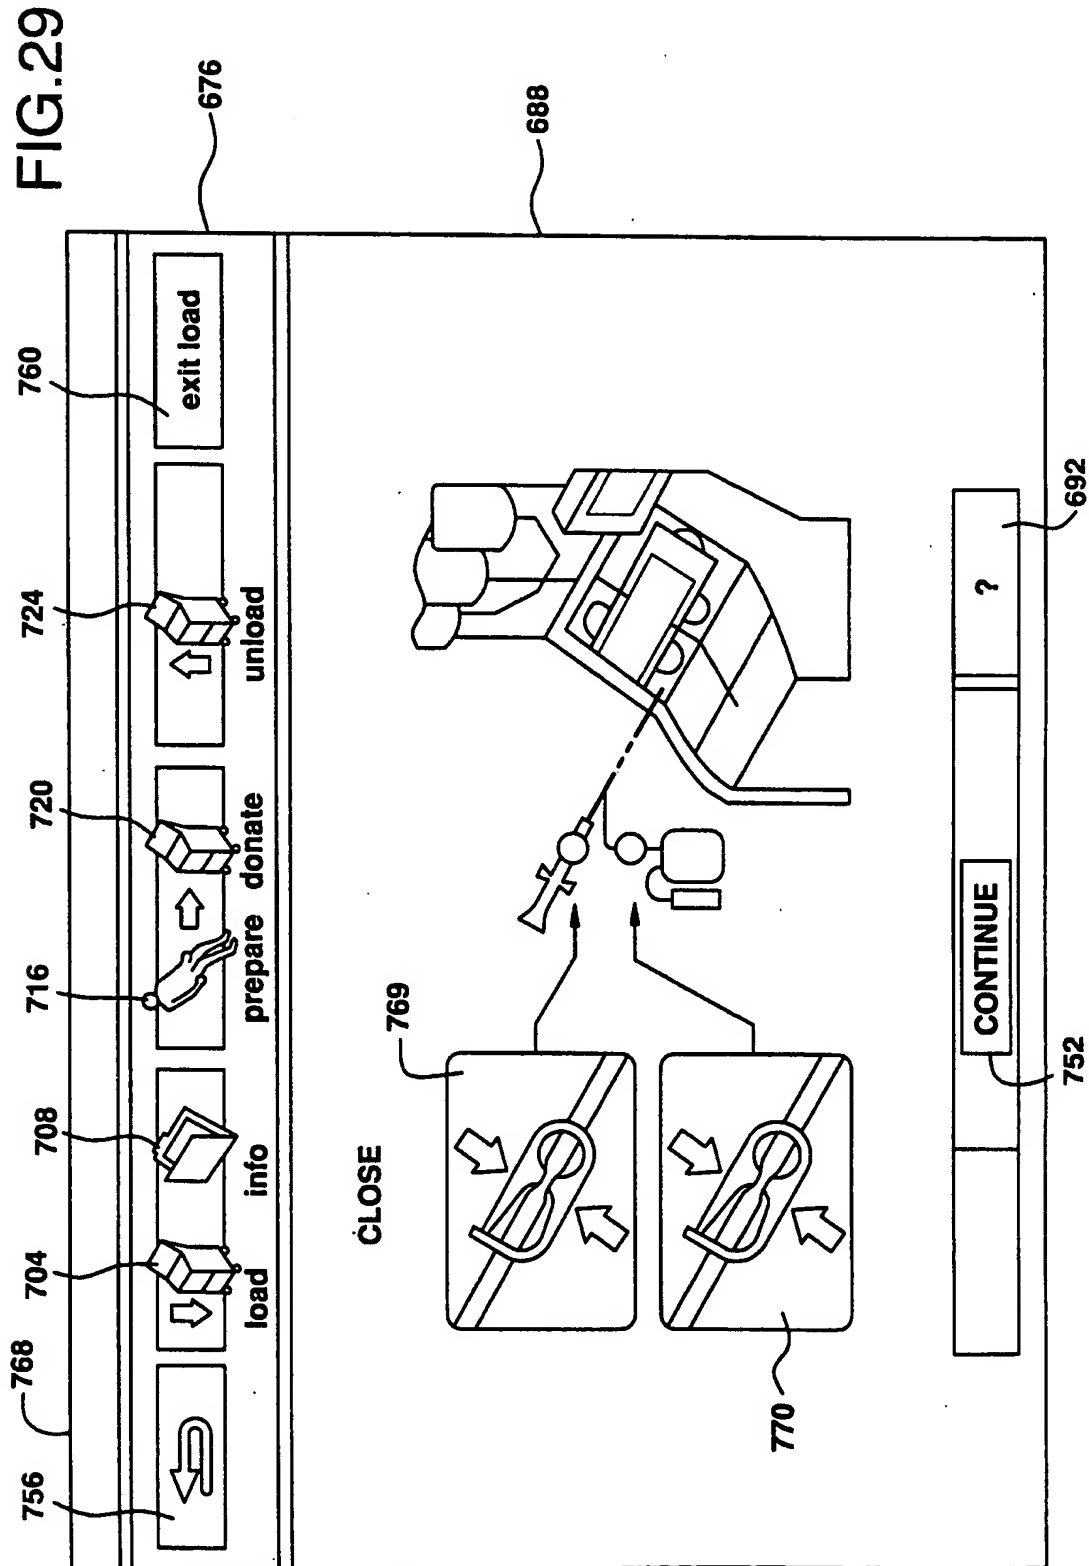


FIG.30

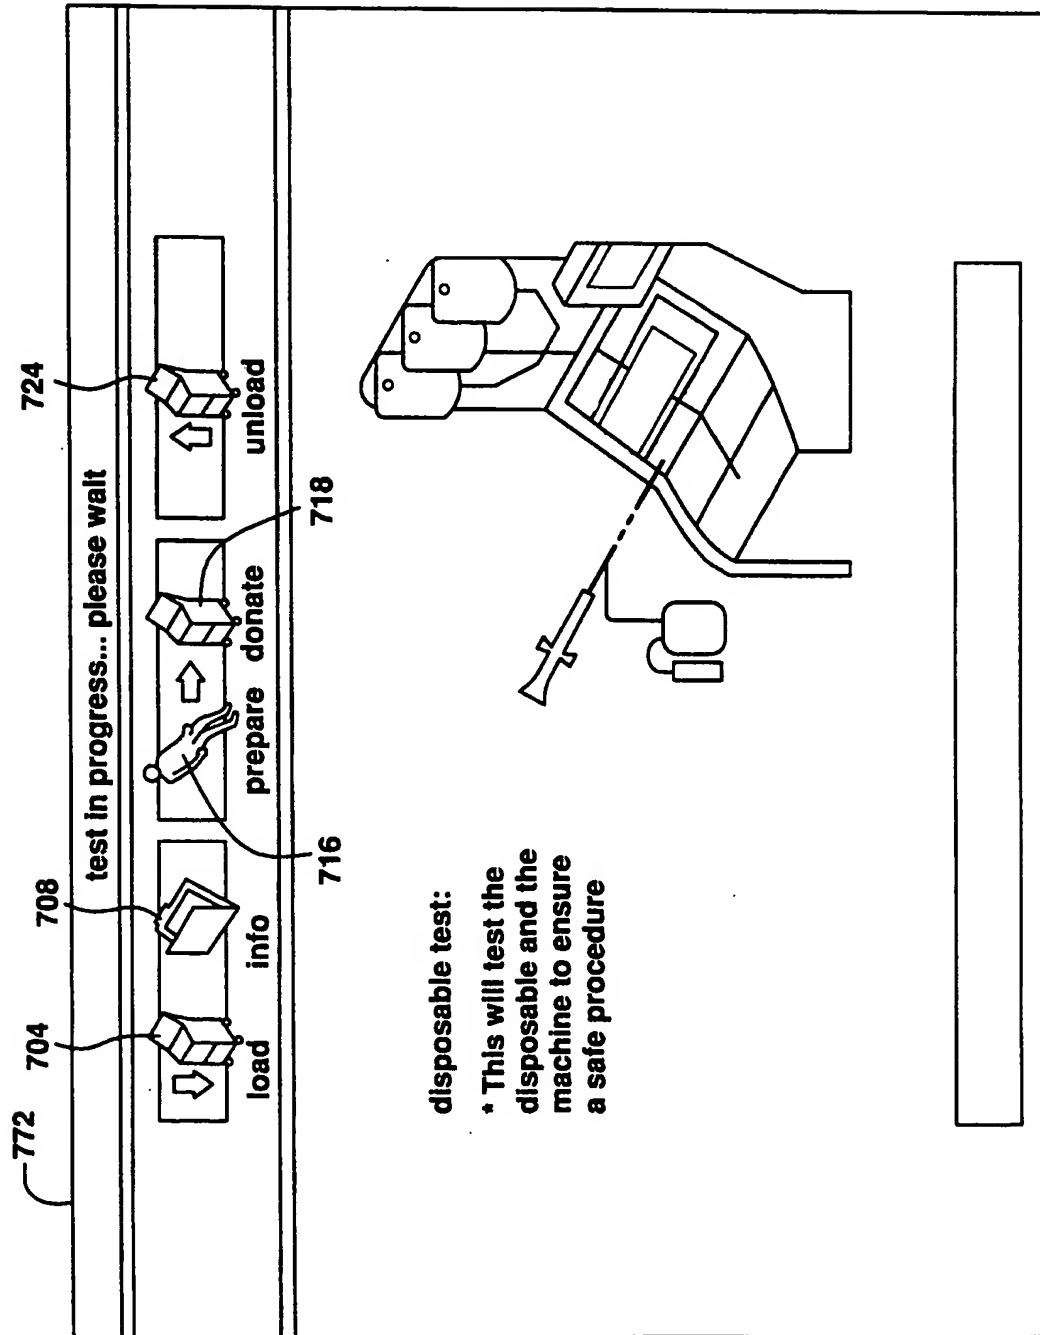


FIG. 31

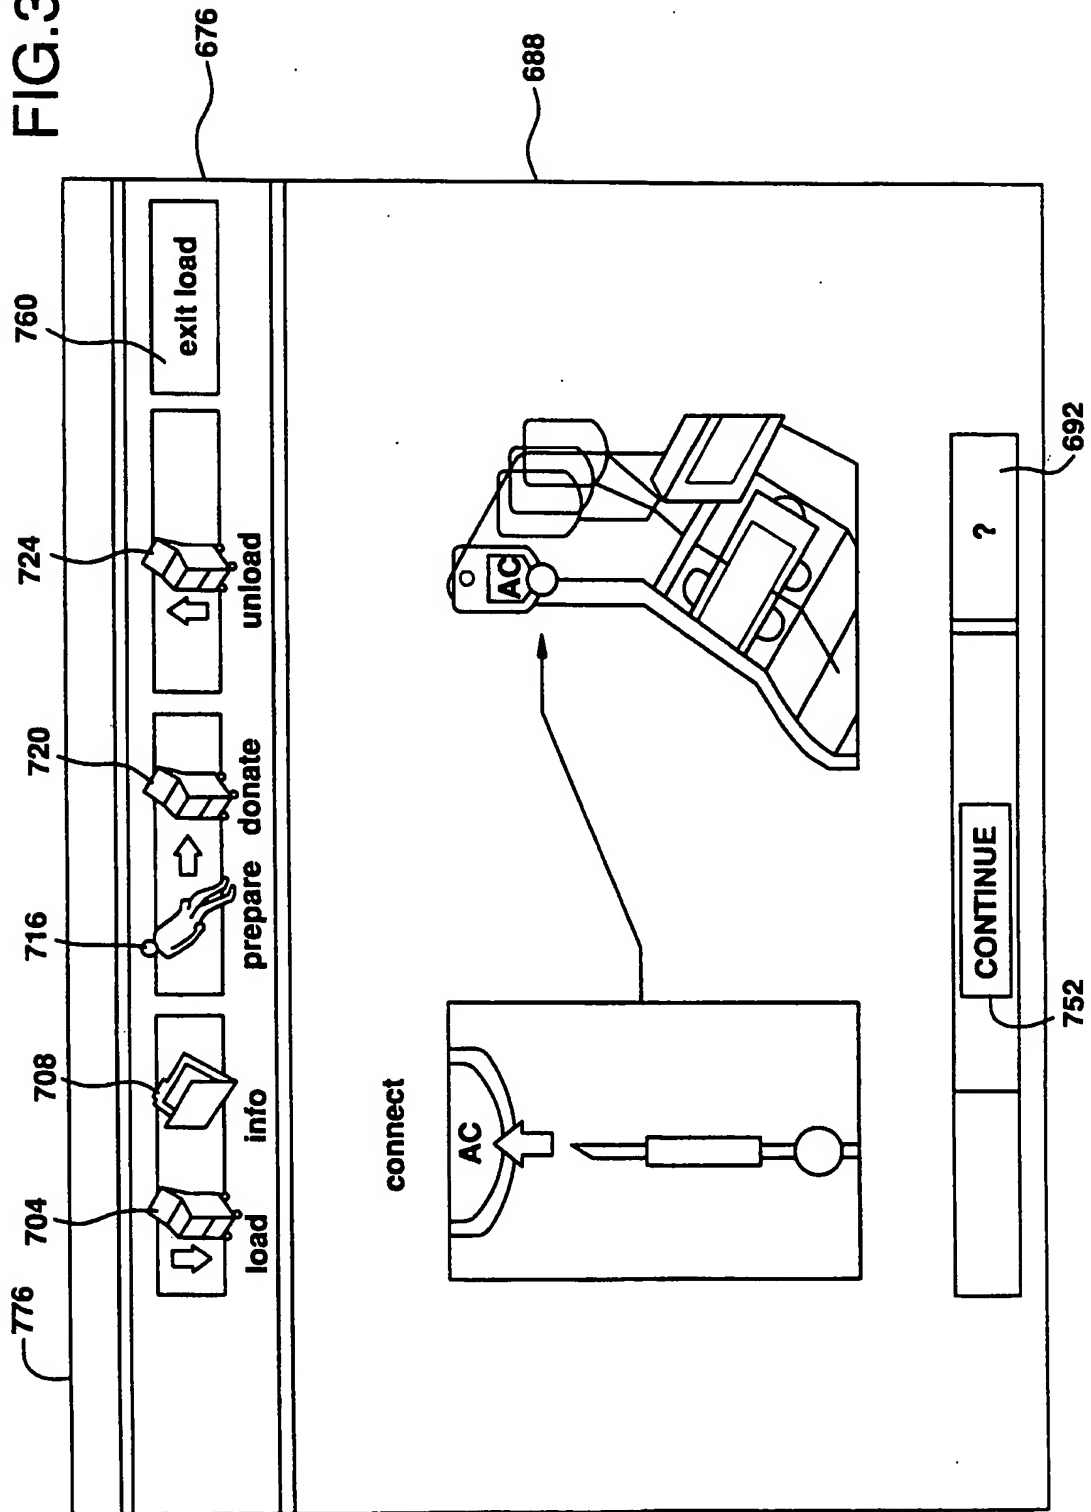


FIG.32

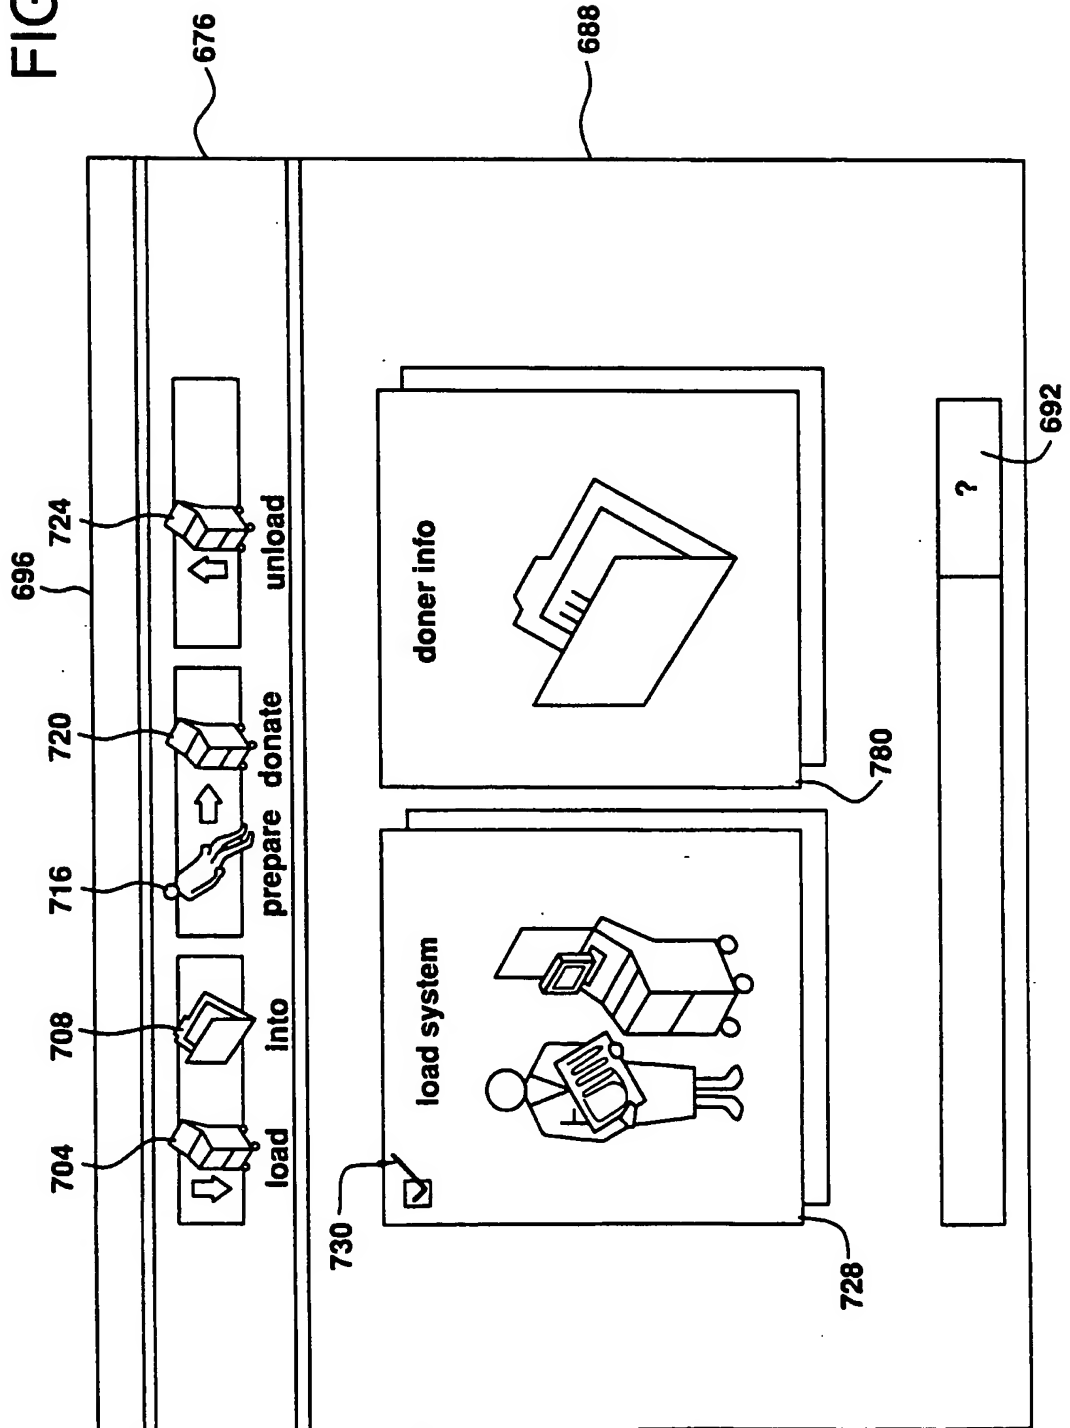


FIG.33

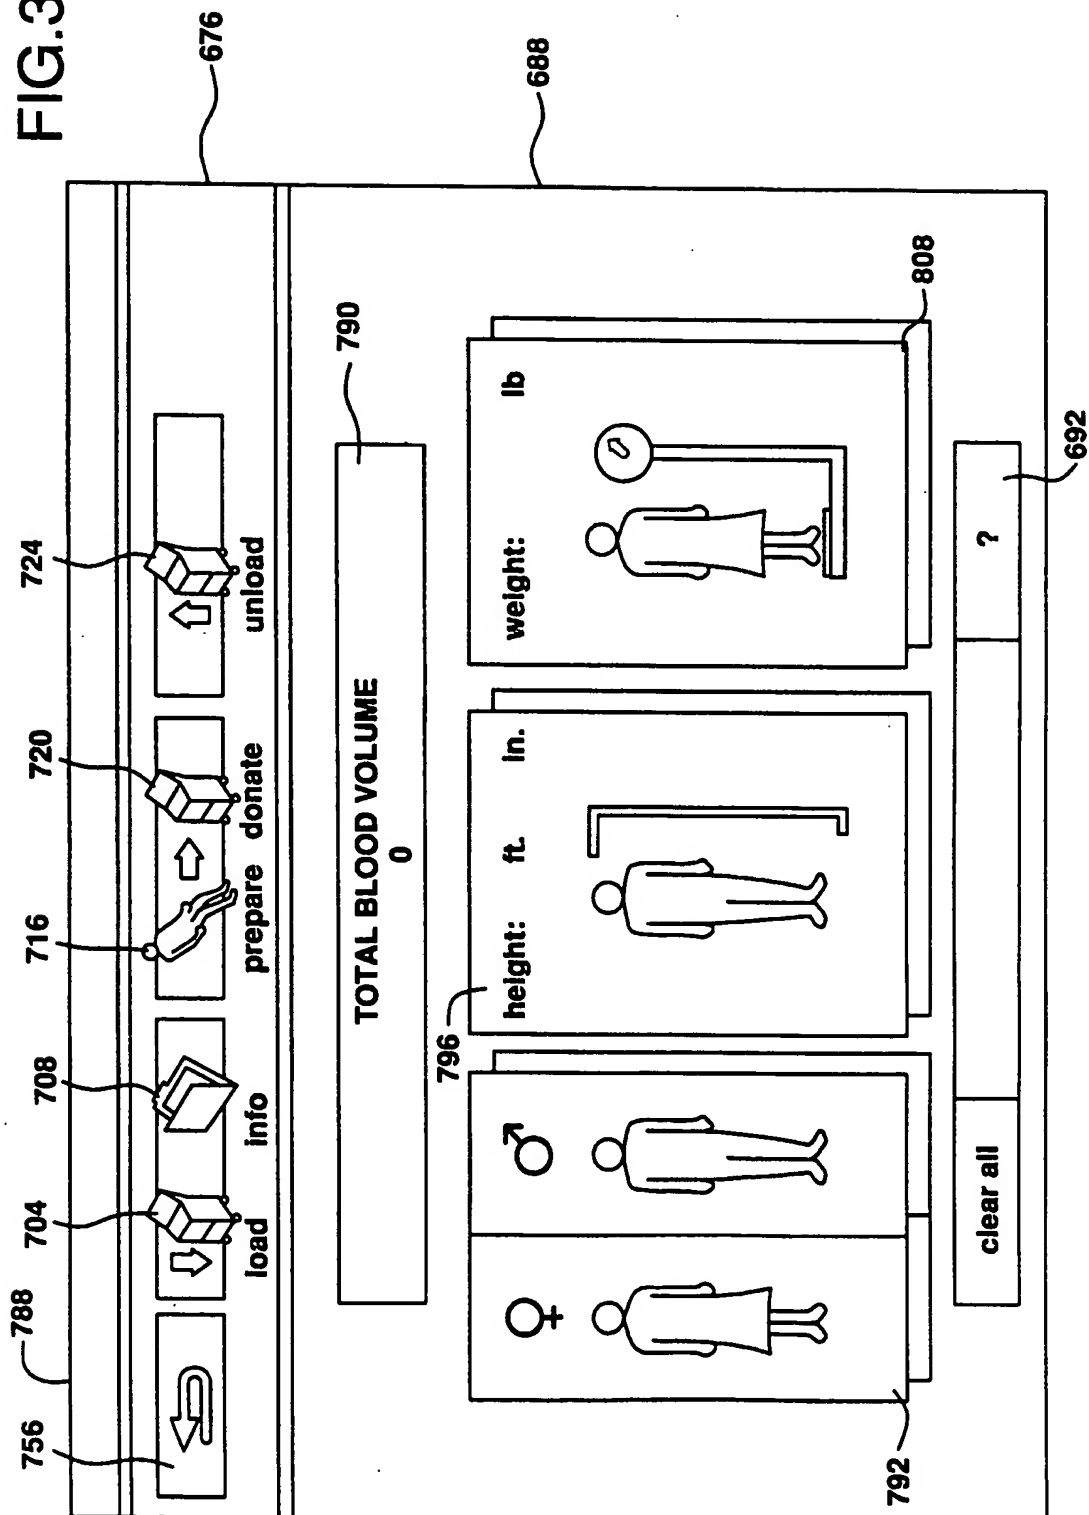


FIG.34

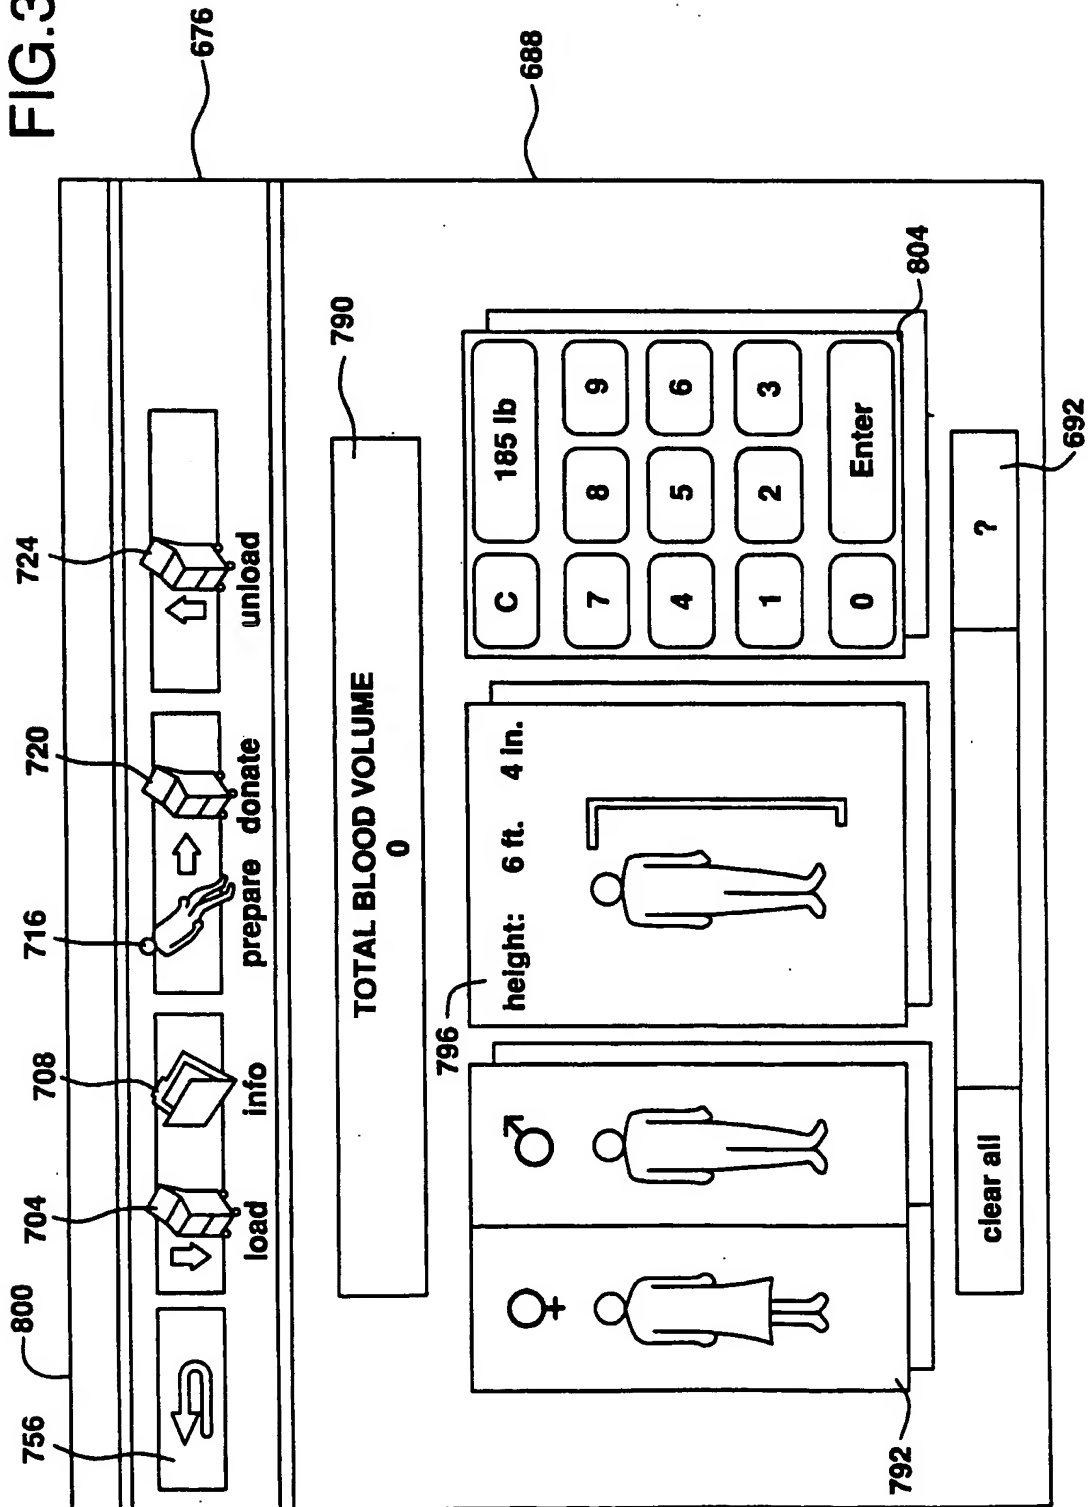






FIG. 36

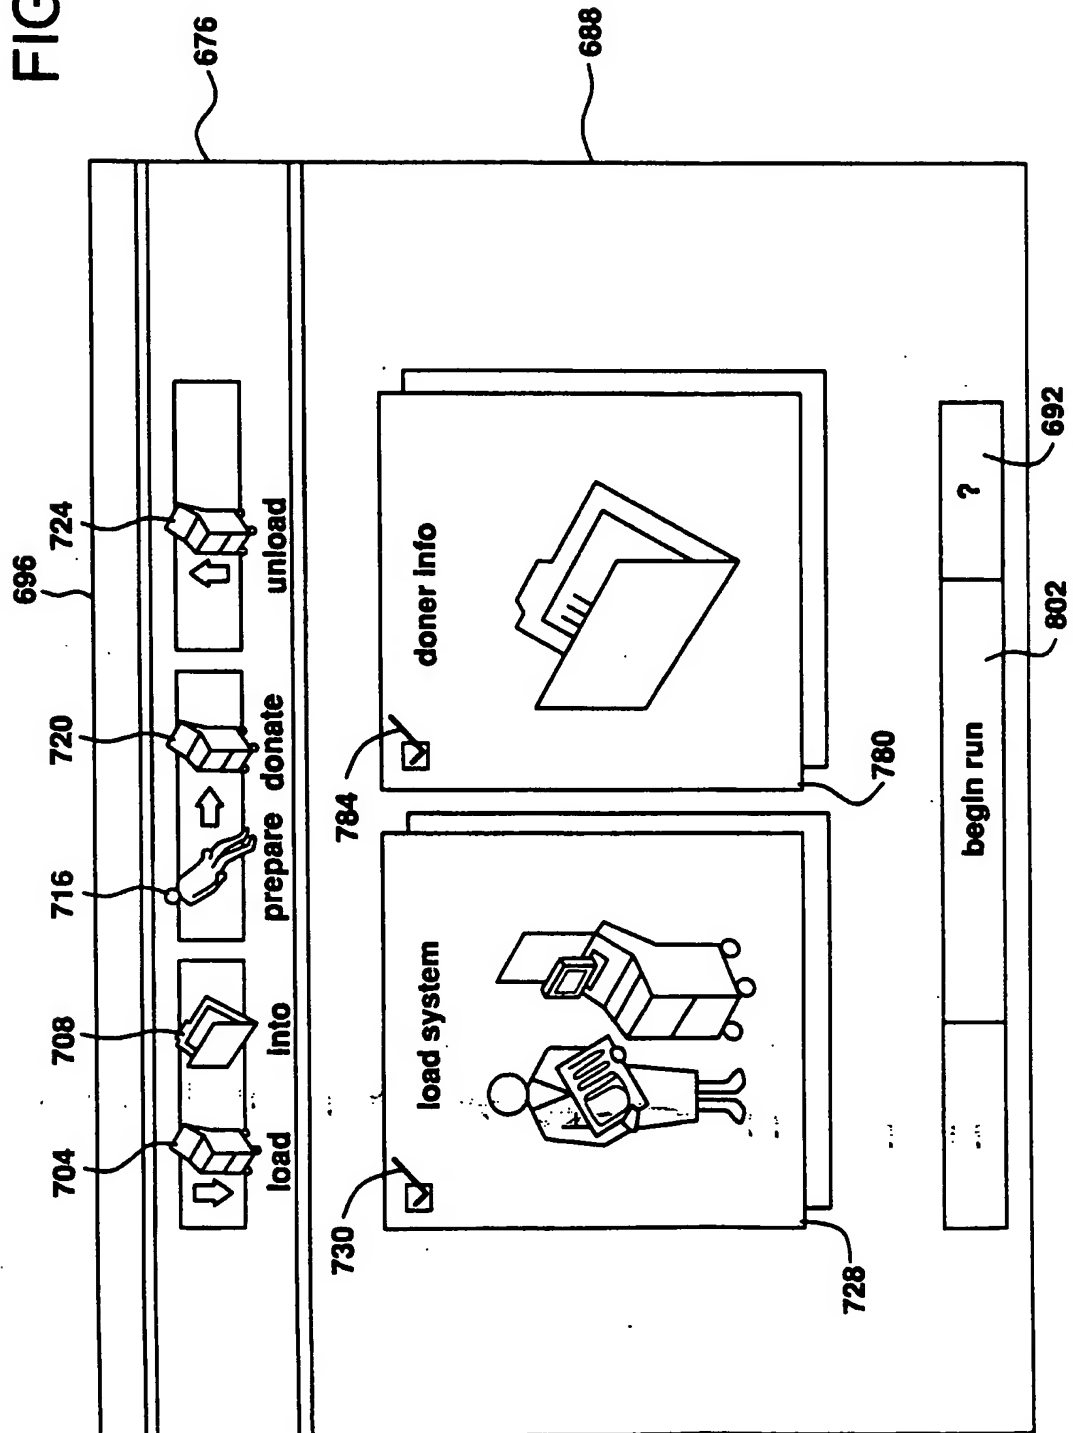


FIG.37

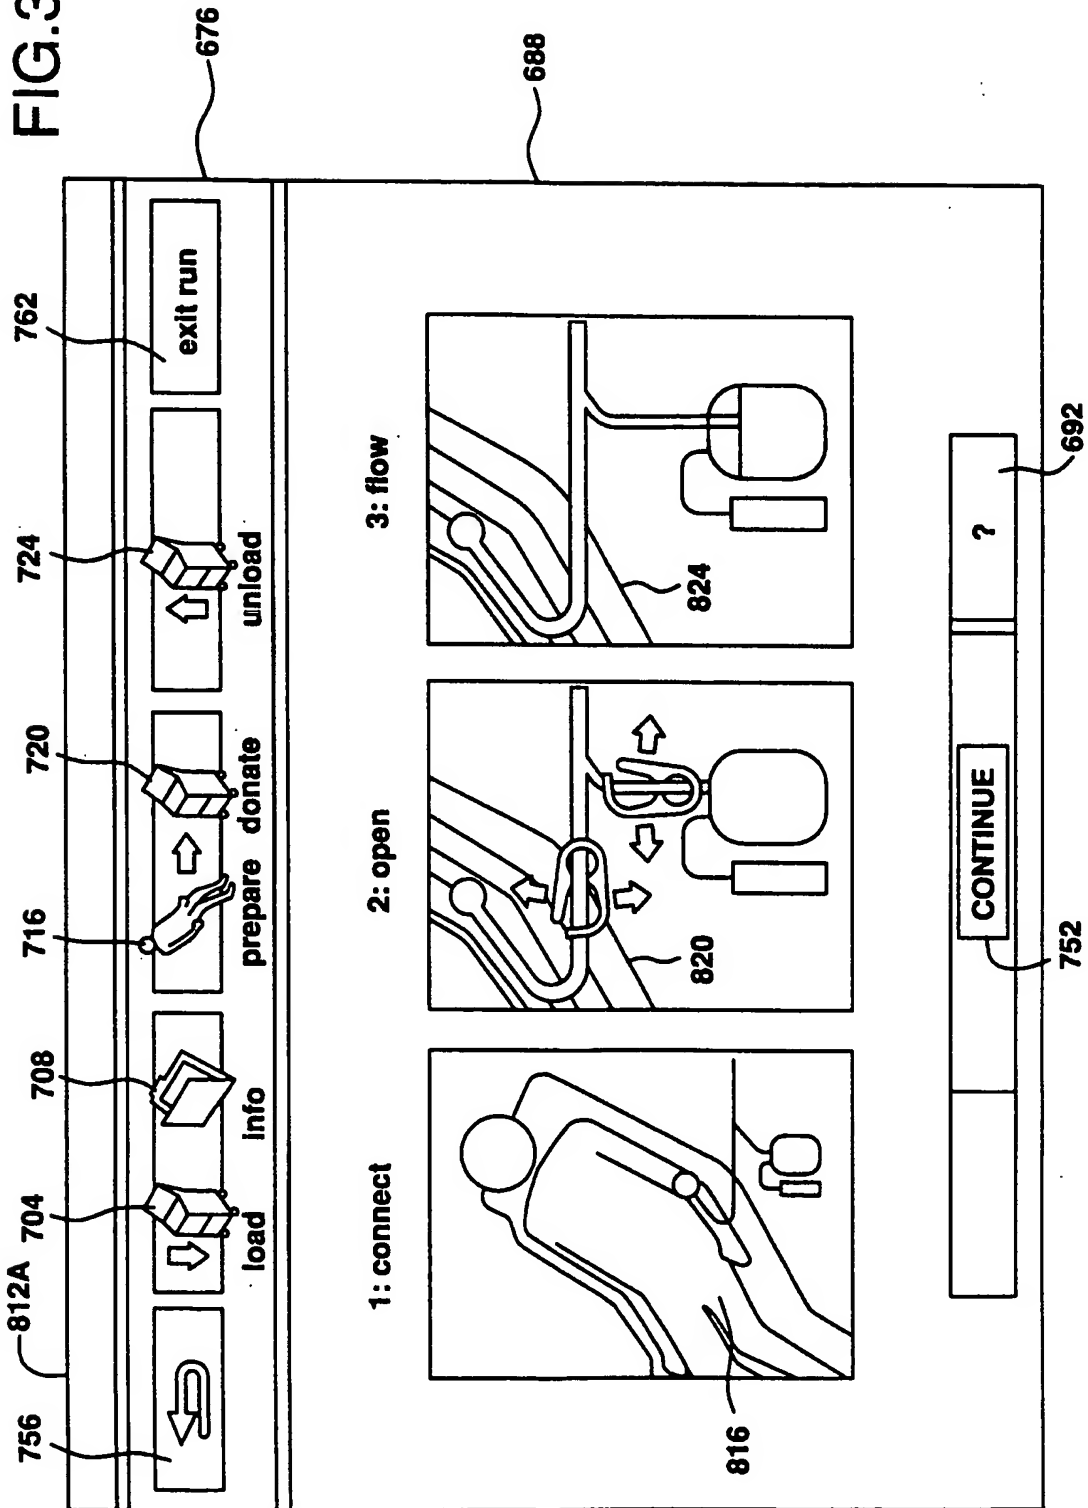


FIG.38

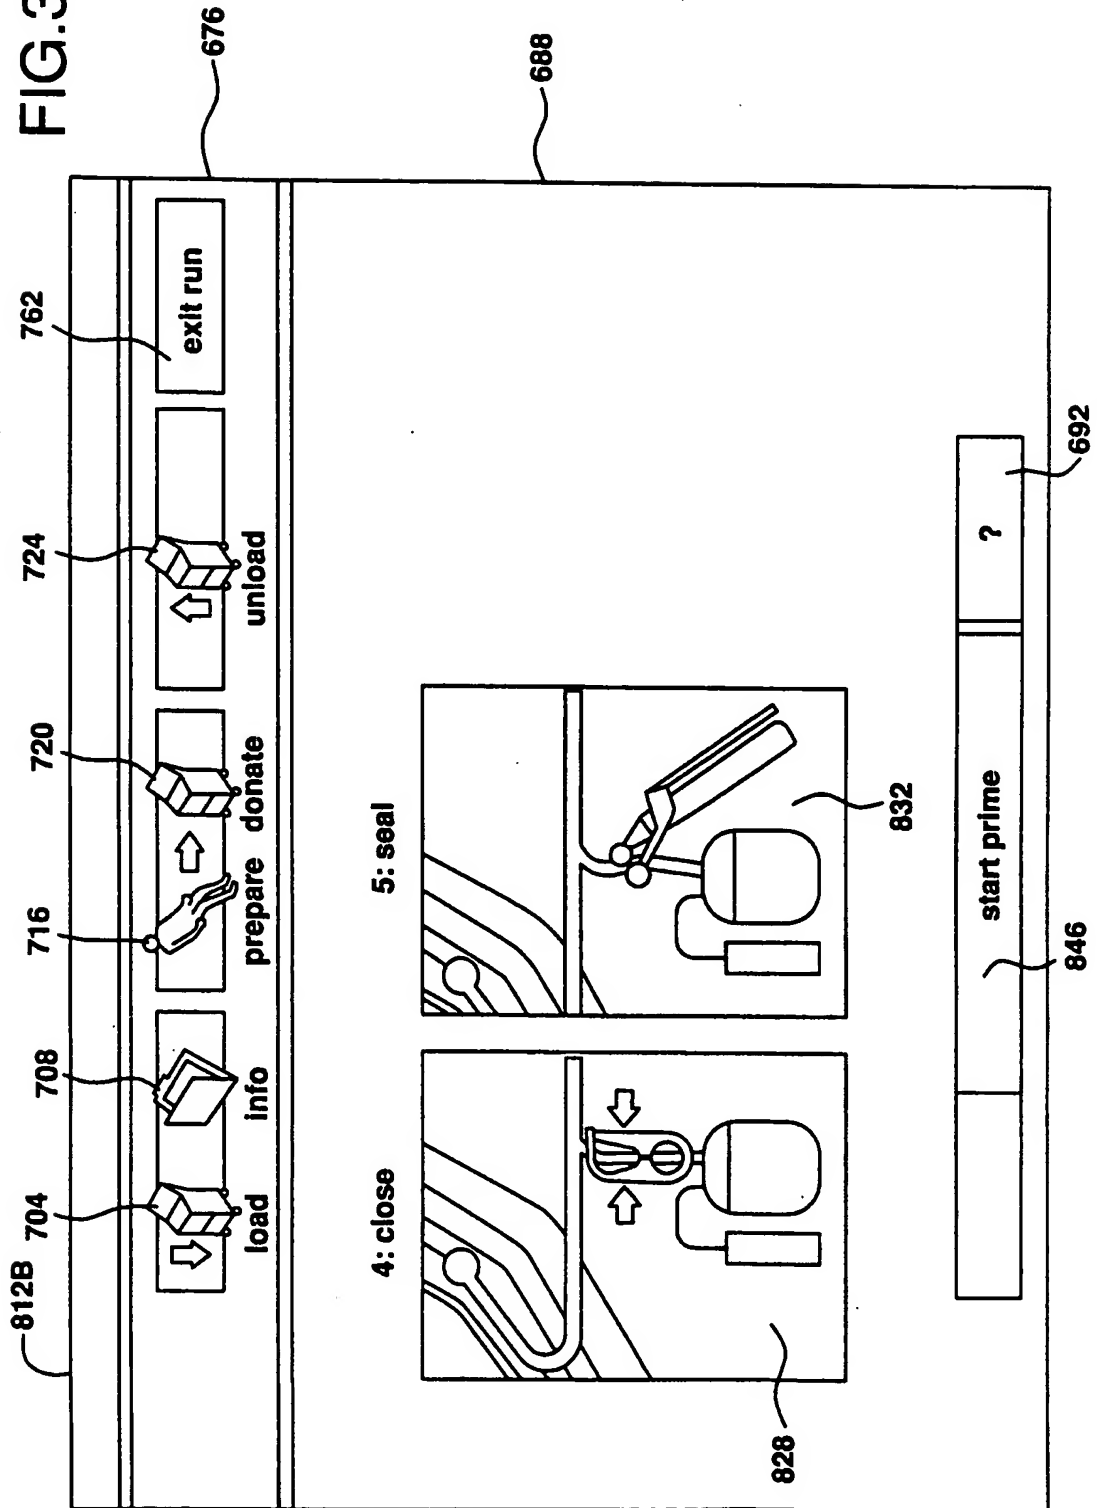


FIG. 39

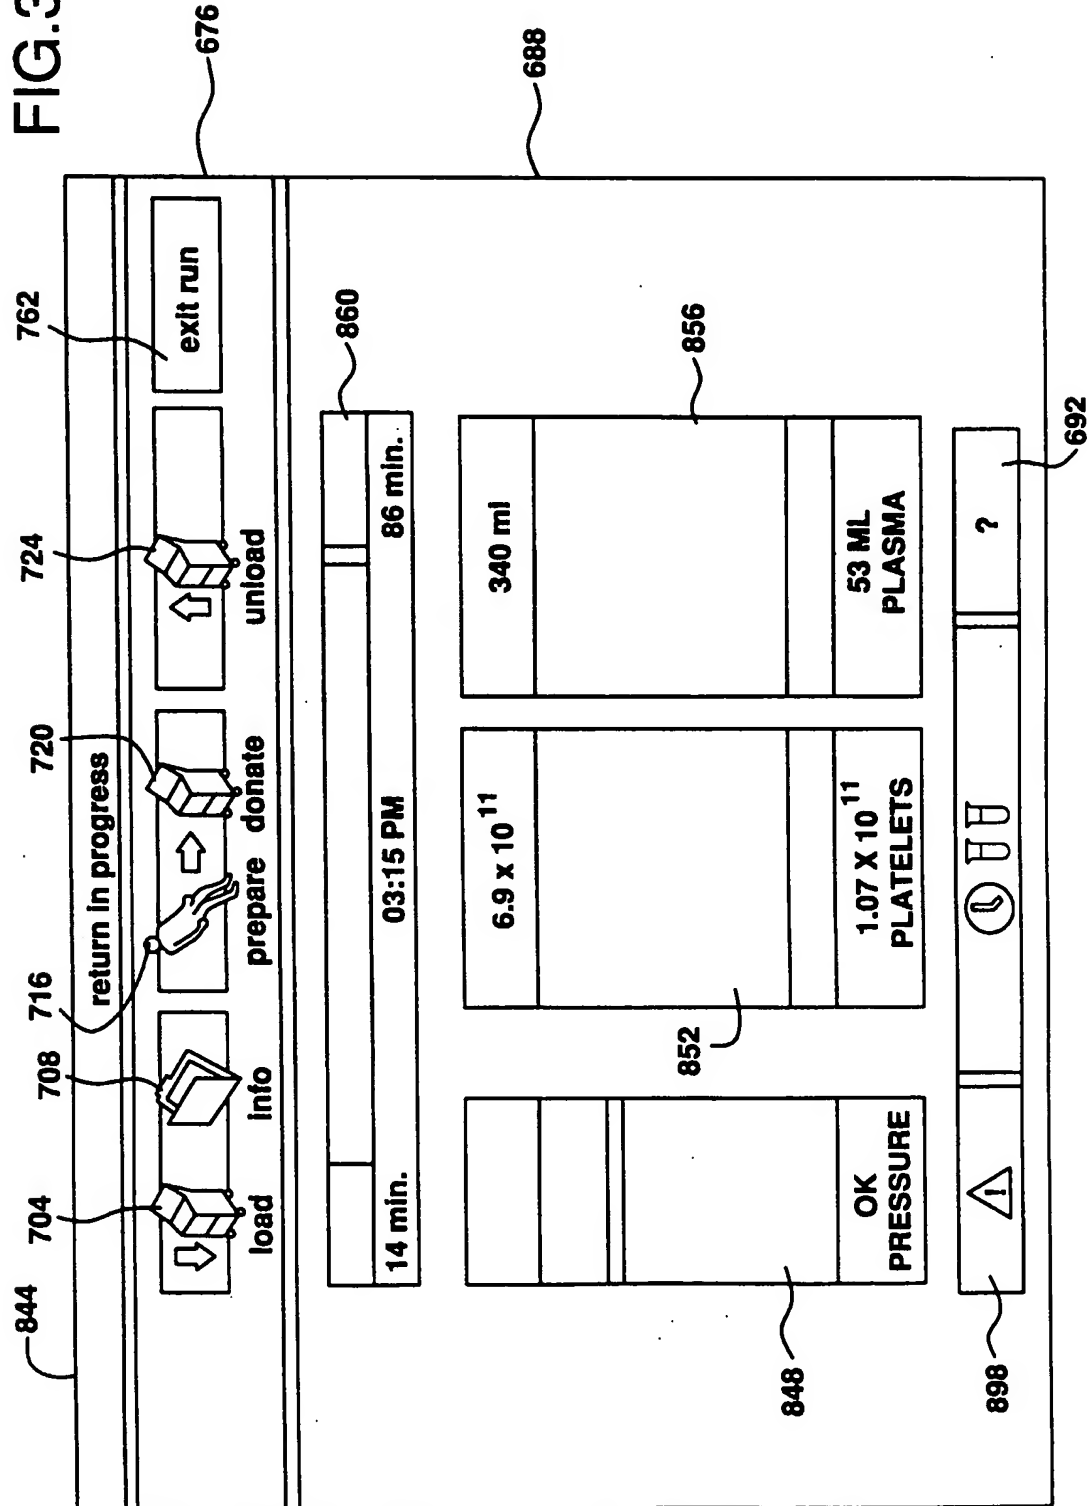


FIG. 40

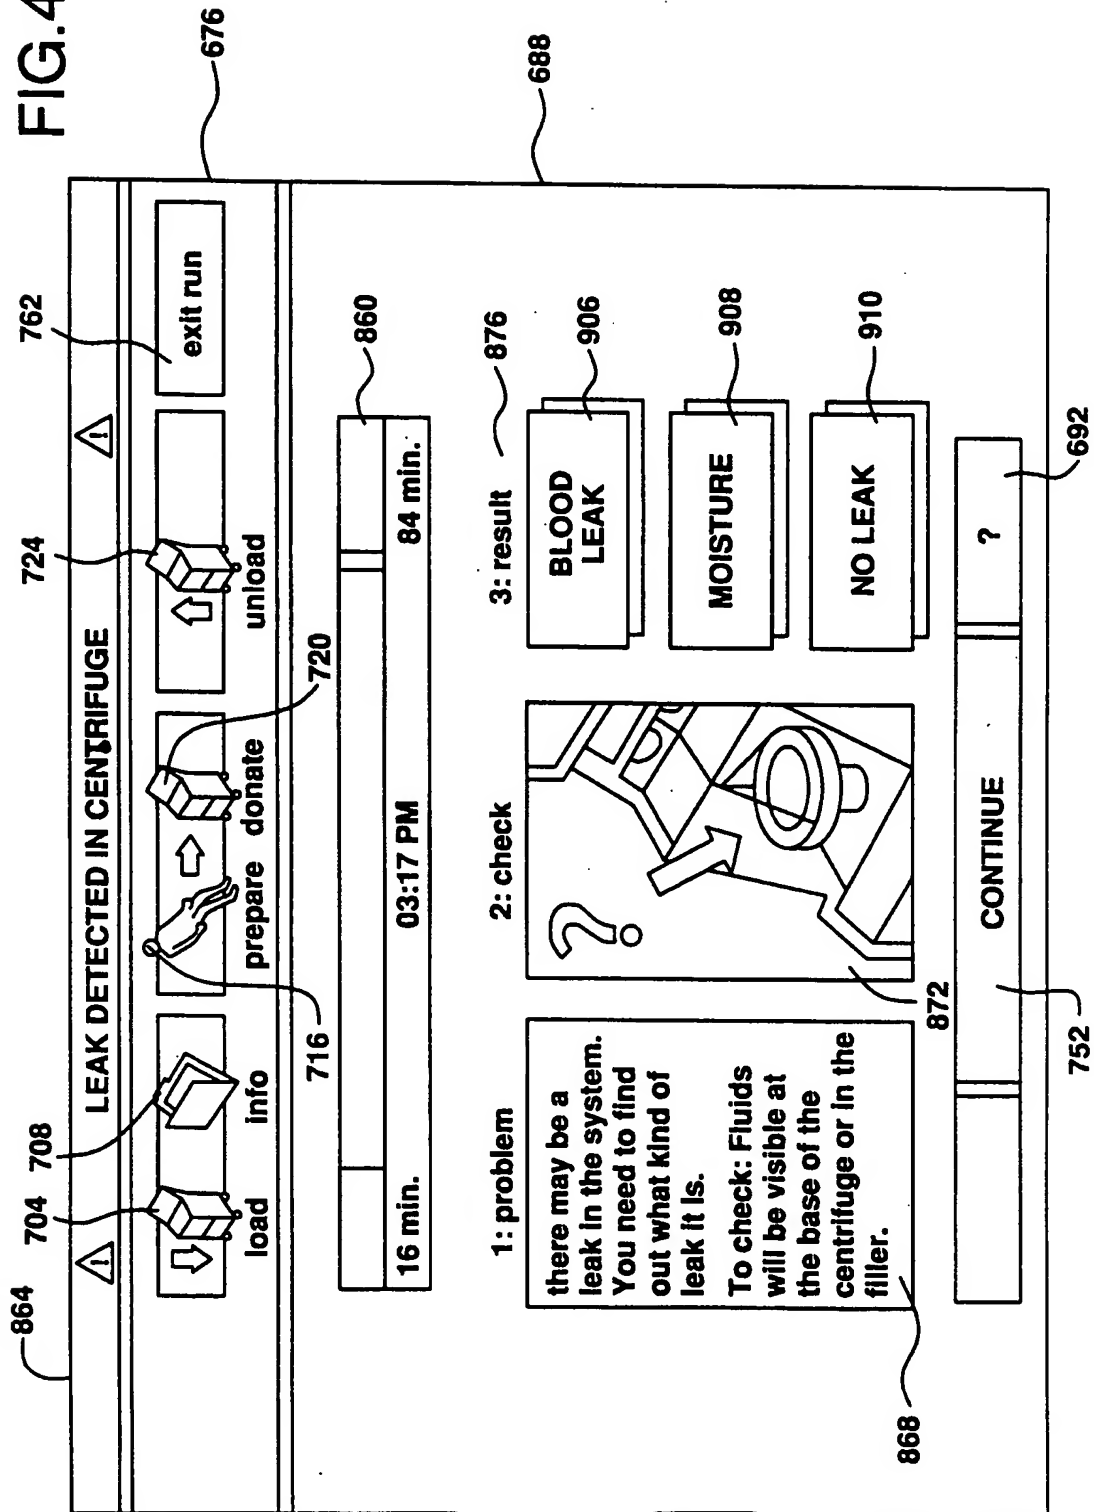


FIG. 41

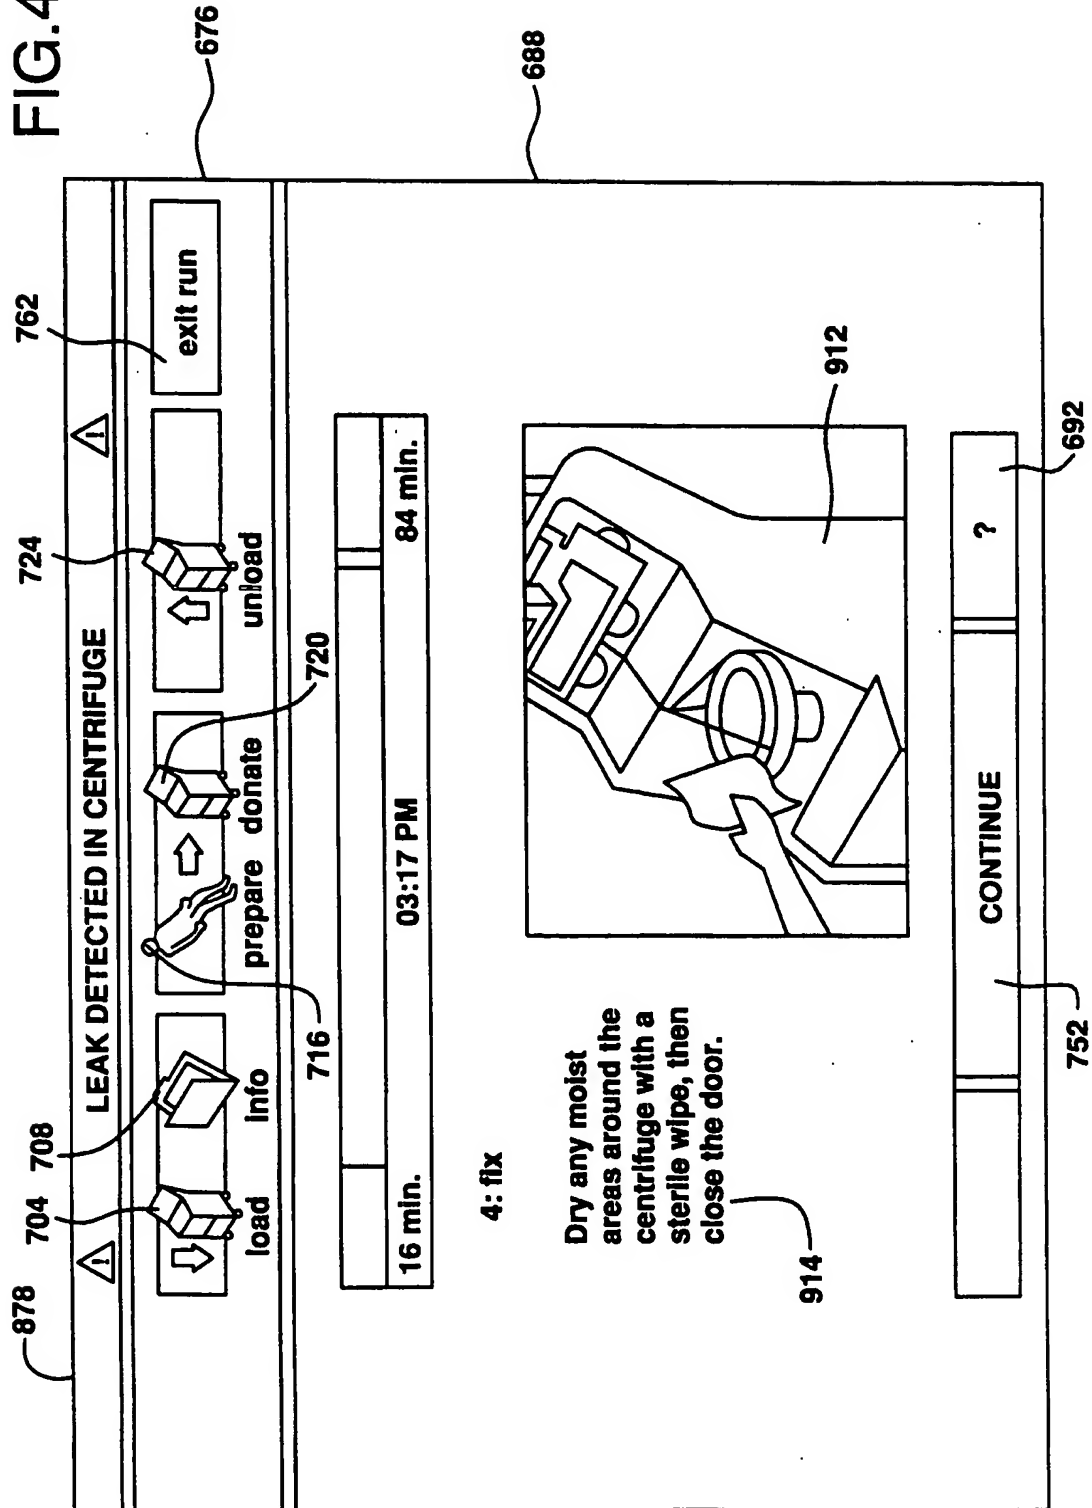


FIG. 42

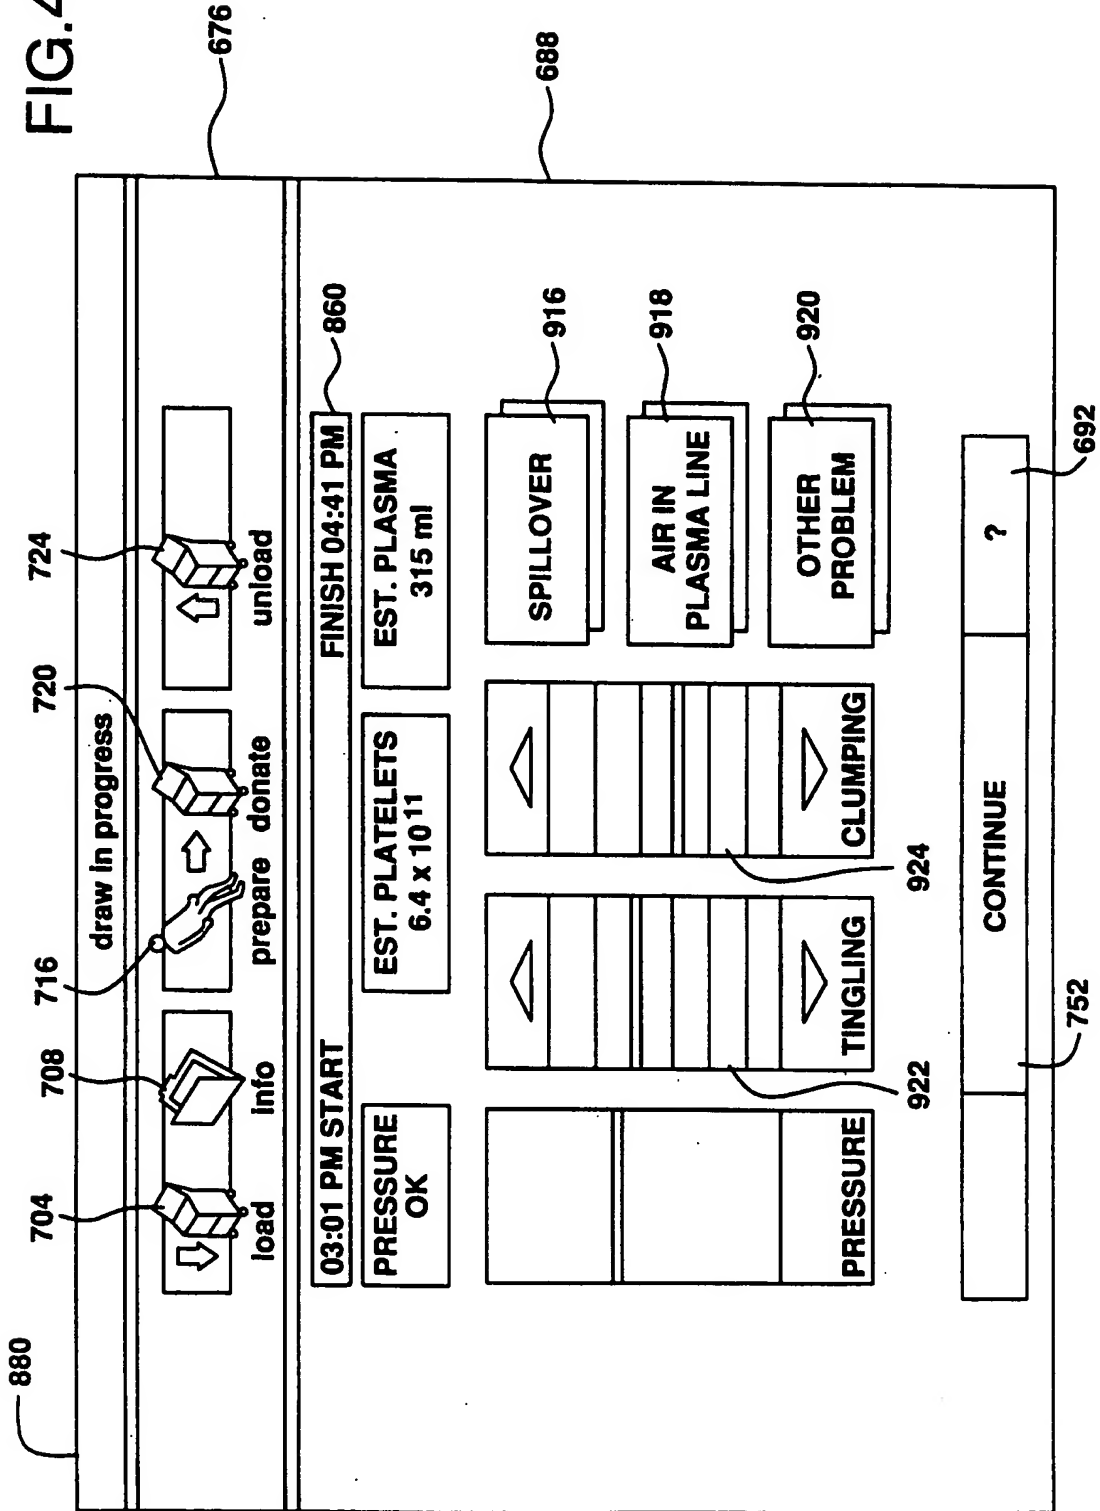


FIG. 43


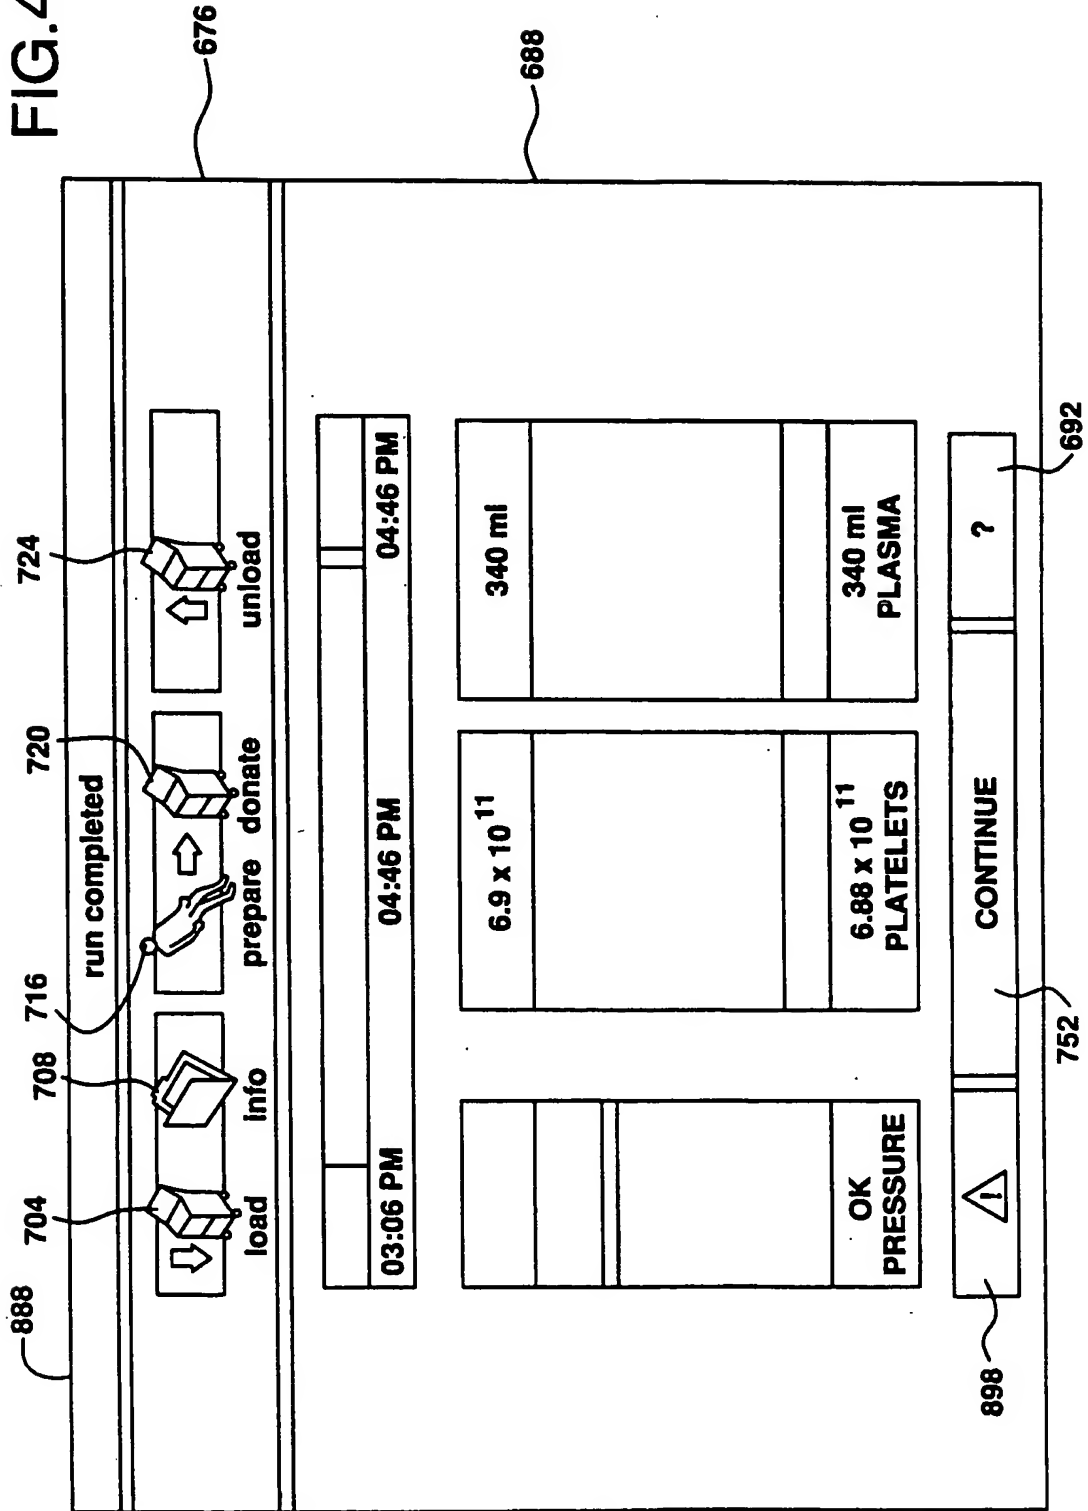






FIG. 45



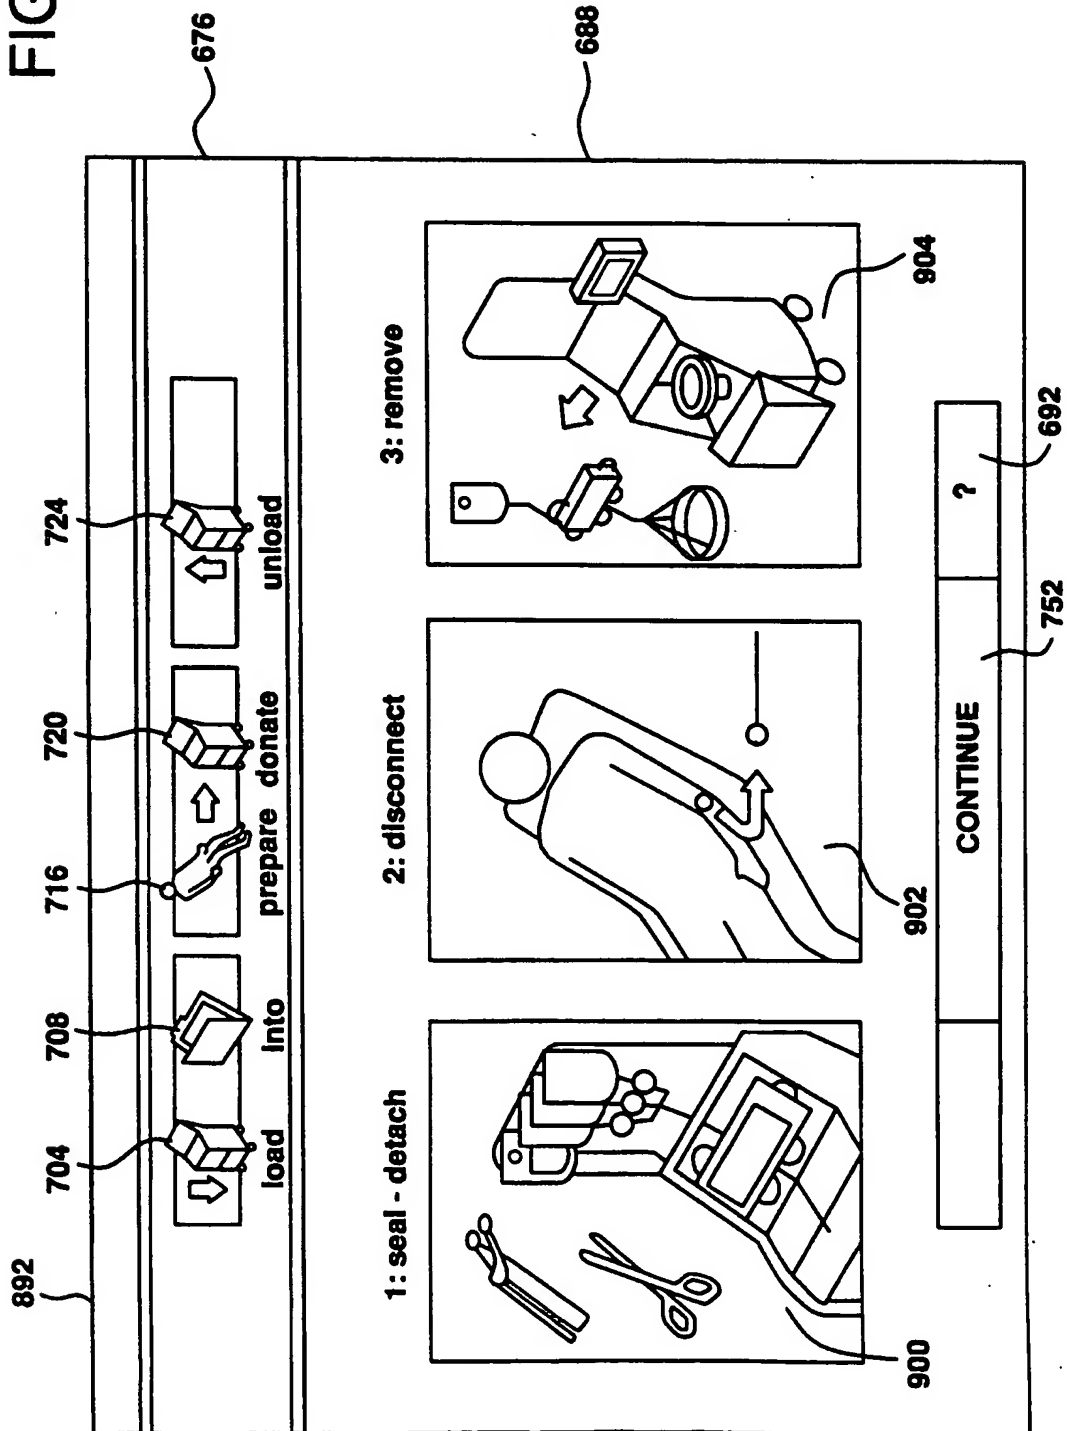

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>A61M 1/38, B04B 5/04</b>		<b>A3</b>	(11) International Publication Number: <b>WO 96/40322</b>
			(43) International Publication Date: 19 December 1996 (19.12.96)

(21) International Application Number: <b>PCT/US96/10212</b>		<p>W.; 4065 Park Drive, Carlsbad, CA 92008 (US). HOLMES, Brian, M.; 5705 Herzman Drive, Evergreen, CO 80439 (US). KAPPUS, John, J.; 851 Lafayette Street, Denver, CO 80217 (US). LANGLEY, Robert, W.; 10160 Xavier Court, Westminster, CO 80218 (US). MENHENNETT, Thomas, L.; 170 Cherrywood Lane, Louisville, CO 80027 (US). MUDLOFF, Frederick, S.; 509 West Sycamore Circle, Louisville, CO 80027 (US). MURRAY, Richard, E.; 85 Benthaven Place, Boulder, CO 80303 (US). SHOULDICE, David, R.; 1863 South Robb Street, Lakewood, CO 80232 (US). STEELE, Chad, C.; 10452 Jacob Place, Littleton, CO 80125 (US). TOAVS, Coy; 310 South Finch, Lafayette, CO 80026 (US). WAHL, Terry, R.; 5201 South Dayton Street, Englewood, CO 80111 (US).</p>
(22) International Filing Date: <b>5 June 1996 (05.06.96)</b>		
(30) Priority Data:		
480,617	7 June 1995 (07.06.95) US	
504,049	7 June 1995 (07.06.95) US	
486,012	7 June 1995 (07.06.95) US	<p>(74) Agent: WINSOR, Bruce, R.; Cobe Laboratories, Inc., 14401 West 65th Way, Arvada, CO 80004 (US).</p>
483,515	7 June 1995 (07.06.95) US	
483,574	7 June 1995 (07.06.95) US	
487,606	7 June 1995 (07.06.95) US	
476,542	7 June 1995 (07.06.95) US	
486,217	7 June 1995 (07.06.95) US	<p>(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p>
482,285	7 June 1995 (07.06.95) US	
484,209	7 June 1995 (07.06.95) US	
(71) Applicant: COBE LABORATORIES, INC. [US/US]; 14401 West 65th Way, Arvada, CO 80004 (US).		
(72) Inventors: BAINBRIDGE, Marlene, Adele; 14420 Kuehster Road, Littleton, CO 80127 (US). BILODEAU, Leon, E.; 646 West Easter Place, Littleton, CO 80120 (US). BLAKESLEE, Jeffrey, J.; 12571 West 84th Circle, Arvada, CO 80005 (US). BRIERTON, Mark, J.; 26 Tecoma Circle, Littleton, CO 80127 (US). CORBIN, Frank, III; 9703 West Arlington Avenue, Littleton, CO 80123 (US). CRUZ, Edward, V.; 3958 Greenwood Street, Newbury Park, CA 91320 (US). DOLECEK, Victor, D.; 6607 South Atchison Way, Englewood, CO 80111 (US). GARRISON, Denise, C.; 2230 Park County Road 72, Bailey, CO 80421 (US). GORDON, Timothy, M.; 8072 South Zephyr Street, Littleton, CO 80123 (US). HEMPSTEAD, Russell; 2960 Dover Drive, Boulder, CO 80303 (US). HOARD, David,		

**Published**  
*With international search report.*  
*Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.*

(88) Date of publication of the international search report: 6 March 1997 (06.03.97)

(54) Title: EXTRACORPOREAL BLOOD PROCESSING METHODS AND APPARATUS

(57) Abstract

An extracorporeal blood processing system is disclosed which includes a variety of novel components and which may be operated in accordance with a variety of novel methodologies. For instance, the system includes a graphical operator interface which directs the operator through various aspects of the apheresis procedure. Moreover, the system also includes a variety of features relating to loading a blood processing vessel into a blood processing channel and removing the same after completion of the procedure. Furthermore, the system also includes a variety of features relating to utilizing a blood priming of at least portions of the apheresis system in preparation for the procedure. In addition, the system includes a variety of features enhancing the performance of the apheresis system, including the interrelationship between the blood processing vessel and the utilization of high packing factors for the procedure.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

# INTERNATIONAL SEARCH REPORT

In. onal Application No  
PCT/US 96/10212

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 A61M1/38 B04B5/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 A61M B04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP,A,0 284 764 (IBM CORP.) 5 October 1988 see page 3, line 13 - line 42 see page 15, line 52 - page 16, line 25 ---	1
Y	WO,A,95 03107 (BAXTER INTERNATIONAL INC.) 2 February 1995 see page 9, line 5 - line 25 see page 14, line 15 - page 15, line 29 ---	1
A	WO,A,94 11093 (ALTHIN MEDICAL INC.) 26 May 1994 see page 12, line 20 - line 26 see page 45, line 24 - page 47, line 17 ---	2 33
A	EP,A,0 096 217 (IBM CORP.) 21 December 1983 see page 9, line 6 - page 10, line 12 ---	41-44, 172
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- \*&\* document member of the same patent family

Date of the actual completion of the international search

17 January 1997

Date of mailing of the international search report

31. 01. 97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+ 31-70) 340-3016

Authorized officer

Vereecke, A

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 96/10212

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP,A,0 214 803 (FISONS PLC) 18 March 1987 see page 10, line 5 - line 15	192
A	see page 18, line 18 - page 19, line 3	41
Y	see figures	193
	---	
X	US,A,4 114 802 (R BROWN) 19 September 1978 see column 3, line 27 - column 4, line 16 see figures 1,2	83
	---	
X	WO,A,88 05691 (BAXTER TRAVENOL LABORATORIES INC) 11 August 1988 see page 13, line 33 - page 14, line 1 see page 17, line 21 - line 24 see page 22, line 19 - line 26	164-166
X	see page 29, line 7 - page 30, line 31	123-126
	---	
A	WO,A,93 12888 (BAXTER TRAVENOL LABORATORIES INC) 8 July 1993 see page 25, line 26 - page 26, line 7 see figure 20	89
	---	
Y	GB,A,2 176 717 (COBE LABORATORIES INC.) 7 January 1987 see the whole document	193
	---	
X	WO,A,88 01880 (R HOMBROUCKX) 24 March 1988  see page 13, line 20 - line 32 see page 15, line 25 - line 34 see page 24, line 31 - line 33 see figures	199,201, 203
	---	
X	DE,A,26 36 290 (FRESENIUS IND KG) 16 February 1978 see page 11, line 3 - line 11 see figure 1	199,201, 203
	---	
X	FR,A,2 390 173 (BAXTER TRAVENOL LABORATORIES INC) 8 December 1978 see the whole document	208
	---	
A	EP,A,0 165 751 (CHIRANA) 27 December 1985 see page 10, line 25 - page 11, line 1 see page 14, line 9 - page 15, line 9 see figures	208
	-----	

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 96/ 10212

**Box I** Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: 146-155  
because they relate to subject matter not required to be searched by this Authority, namely:  
Method for treatment of the body.  
See Rule 39.1(iv) PCT.
2. ☒ Claims Nos.: 18-29  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:  
Lack of ready comprehensibility.  
See Art. 6 PCT.
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

**Box II** Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

Please see annexes

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

☒ The additional search fees were accompanied by the applicant's protest.☐ No protest accompanied the payment of additional search fees.

**FURTHER INFORMATION CONTINUED FROM PCT/ISA/210****MULTIPLE INVENTIONS:****1. CLAIMS 1-17**

In a apheresis system, a method for pictorially displaying at least a portion of the apheresis procedure and to be completed by the operator.

**2. CLAIMS 30-40**

A method for processing blood in an apheresis system comprising:  
detecting a potential existence of a first condition;  
prompting an operator to perform an investigation relating to said condition;  
prompting the operator to specify the result of said investigation.

**3. CLAIMS 41-73, 172-184, 187-191**

A disposable for an apheresis system and method.

**4. CLAIMS 74-88**

A centrifuge rotor comprising a channel and a blood processing vessel positionable within this channel; method for loading said vessel in said channel.

**5. CLAIMS 89-122, 169-171, 185-186**

A blood processing channel assembly for an apheresis system; method therefor.

**6. CLAIMS 123-145**

A blood primable apheresis system and method.

**7. CLAIMS 156-163**

A method for processing blood in an apheresis system by adjusting the speed of a rotating blood processing vessel based upon any change in flow rate.

**8. CLAIMS 164-168**

A method for processing blood in an apheresis system comprising a blood processing housing and a channel housing having a diameter of no greater than about ten inches and providing a blood flow from about 40 to 70 milliliters per minute.

**9. CLAIMS 192-198, 204-207, 211**

A disposable assembly for use in an extracorporeal blood processing system comprising pressure sensing means.



## INTERNATIONAL SEARCH REPORT

International Application No. PCT/US 96/ 10212

FURTHER INFORMATION CONTINUED FROM PCT/ISA/210

### 10. CLAIMS 199-203

A disposable assembly for use in a single needle extracorporeal blood processing system comprising gas holding means interconnected to a blood return reservoir.

### 11. CLAIMS 208-210

A disposable assembly for use in an extracorporeal blood processing system comprising a molded cassette having an integral internal blood return reservoir.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 96/10212

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-284764	05-10-88	US-A- 4884199 DE-D- 3889574 DE-T- 3889574 JP-C- 1712334 JP-B- 3081183 JP-A- 63216169	28-11-89 23-06-94 17-11-94 11-11-92 27-12-91 08-09-88
WO-A-9503107	02-02-95	CA-A- 2143830 EP-A- 0662857 JP-T- 8502439 US-A- 5549834	02-02-95 19-07-95 19-03-96 27-08-96
WO-A-9411093	26-05-94	US-A- 5326476 CA-A- 2149246 EP-A- 0623357 EP-A- 0597817 EP-A- 0668793 JP-T- 8504116	05-07-94 26-05-94 09-11-94 18-05-94 30-08-95 07-05-96
EP-A-96217	21-12-83	US-A- 4447221 JP-A- 58219959	08-05-84 21-12-83
EP-A-214803	18-03-87	AU-A- 6213786 FR-A- 2586565 GB-A- 2183178 JP-A- 62106769	05-03-87 06-03-87 03-06-87 18-05-87
US-A-4114802	19-09-78	NONE	
WO-A-8805691	11-08-88	US-A- 4834890 CA-A- 1317917 DE-D- 3884871 DE-T- 3884871 EP-A- 0299054 EP-A- 0486480 JP-B- 2556741 JP-T- 1502029 US-A- 5316666 US-A- 5494578 US-A- 5529691	30-05-89 18-05-93 18-11-93 19-05-94 18-01-89 20-05-92 20-11-96 13-07-89 31-05-94 27-02-96 25-06-96

# INTERNATIONAL SEARCH REPORT

Information on patent family members

In International Application No  
PCT/US 96/10212

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-8805691		US-A- 5573678	12-11-96
		US-A- 5104526	14-04-92
		US-A- 5076911	31-12-91
		US-A- 5322620	21-06-94
		US-A- 5370802	06-12-94
-----			
WO-A-9312888	08-07-93	AU-A- 3421093	28-07-93
		CA-A- 2103911	24-06-93
		EP-A- 0572656	08-12-93
		JP-T- 6505674	30-06-94
		US-A- 5316666	31-05-94
		US-A- 5316667	31-05-94
		US-A- 5360542	01-11-94
		US-A- 5529691	25-06-96
		US-A- 5549834	27-08-96
		US-A- 5573678	12-11-96
		US-A- 5370802	06-12-94
-----			
GB-A-2176717	07-01-87	US-A- 4666598	19-05-87
		CA-A- 1282012	26-03-91
		CA-A- 1308569	13-10-92
		DE-A- 3620743	08-01-87
		DE-C- 3644948	17-05-90
		FR-A- 2583642	26-12-86
		GB-A,B 2208613	12-04-89
		GB-A,B 2208714	12-04-89
		JP-C- 1777042	28-07-93
		JP-B- 4057349	11-09-92
		JP-A- 62005355	12-01-87
		US-A- 4798090	17-01-89
		US-A- 4770787	13-09-88
-----			
WO-A-8801880	24-03-88	BE-A- 905407	10-03-87
		BE-A- 905615	17-04-87
		AU-B- 603140	08-11-90
		AU-A- 7917387	07-04-88
		EP-A- 0304436	01-03-89
		JP-T- 1503682	14-12-89
		US-A- 5120303	09-06-92
-----			

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Application No

PCT/US 96/10212

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE-A-2636290	16-02-78	US-A- 4231366	04-11-80
FR-A-2390173	08-12-78	CA-A- 1104032	30-06-81
		CA-A- 1104458	07-07-81
		DE-A- 2820256	23-11-78
		GB-A- 1601855	04-11-81
		GB-A- 1601856	04-11-81
		JP-A- 53139399	05-12-78
		US-A- 4436620	13-03-84
EP-A-165751	27-12-85	JP-A- 61008057	14-01-86